
AIMUR®
ILUMINACION

Magic Christmas

EUROLAMP®
Pioneers in New Technology !

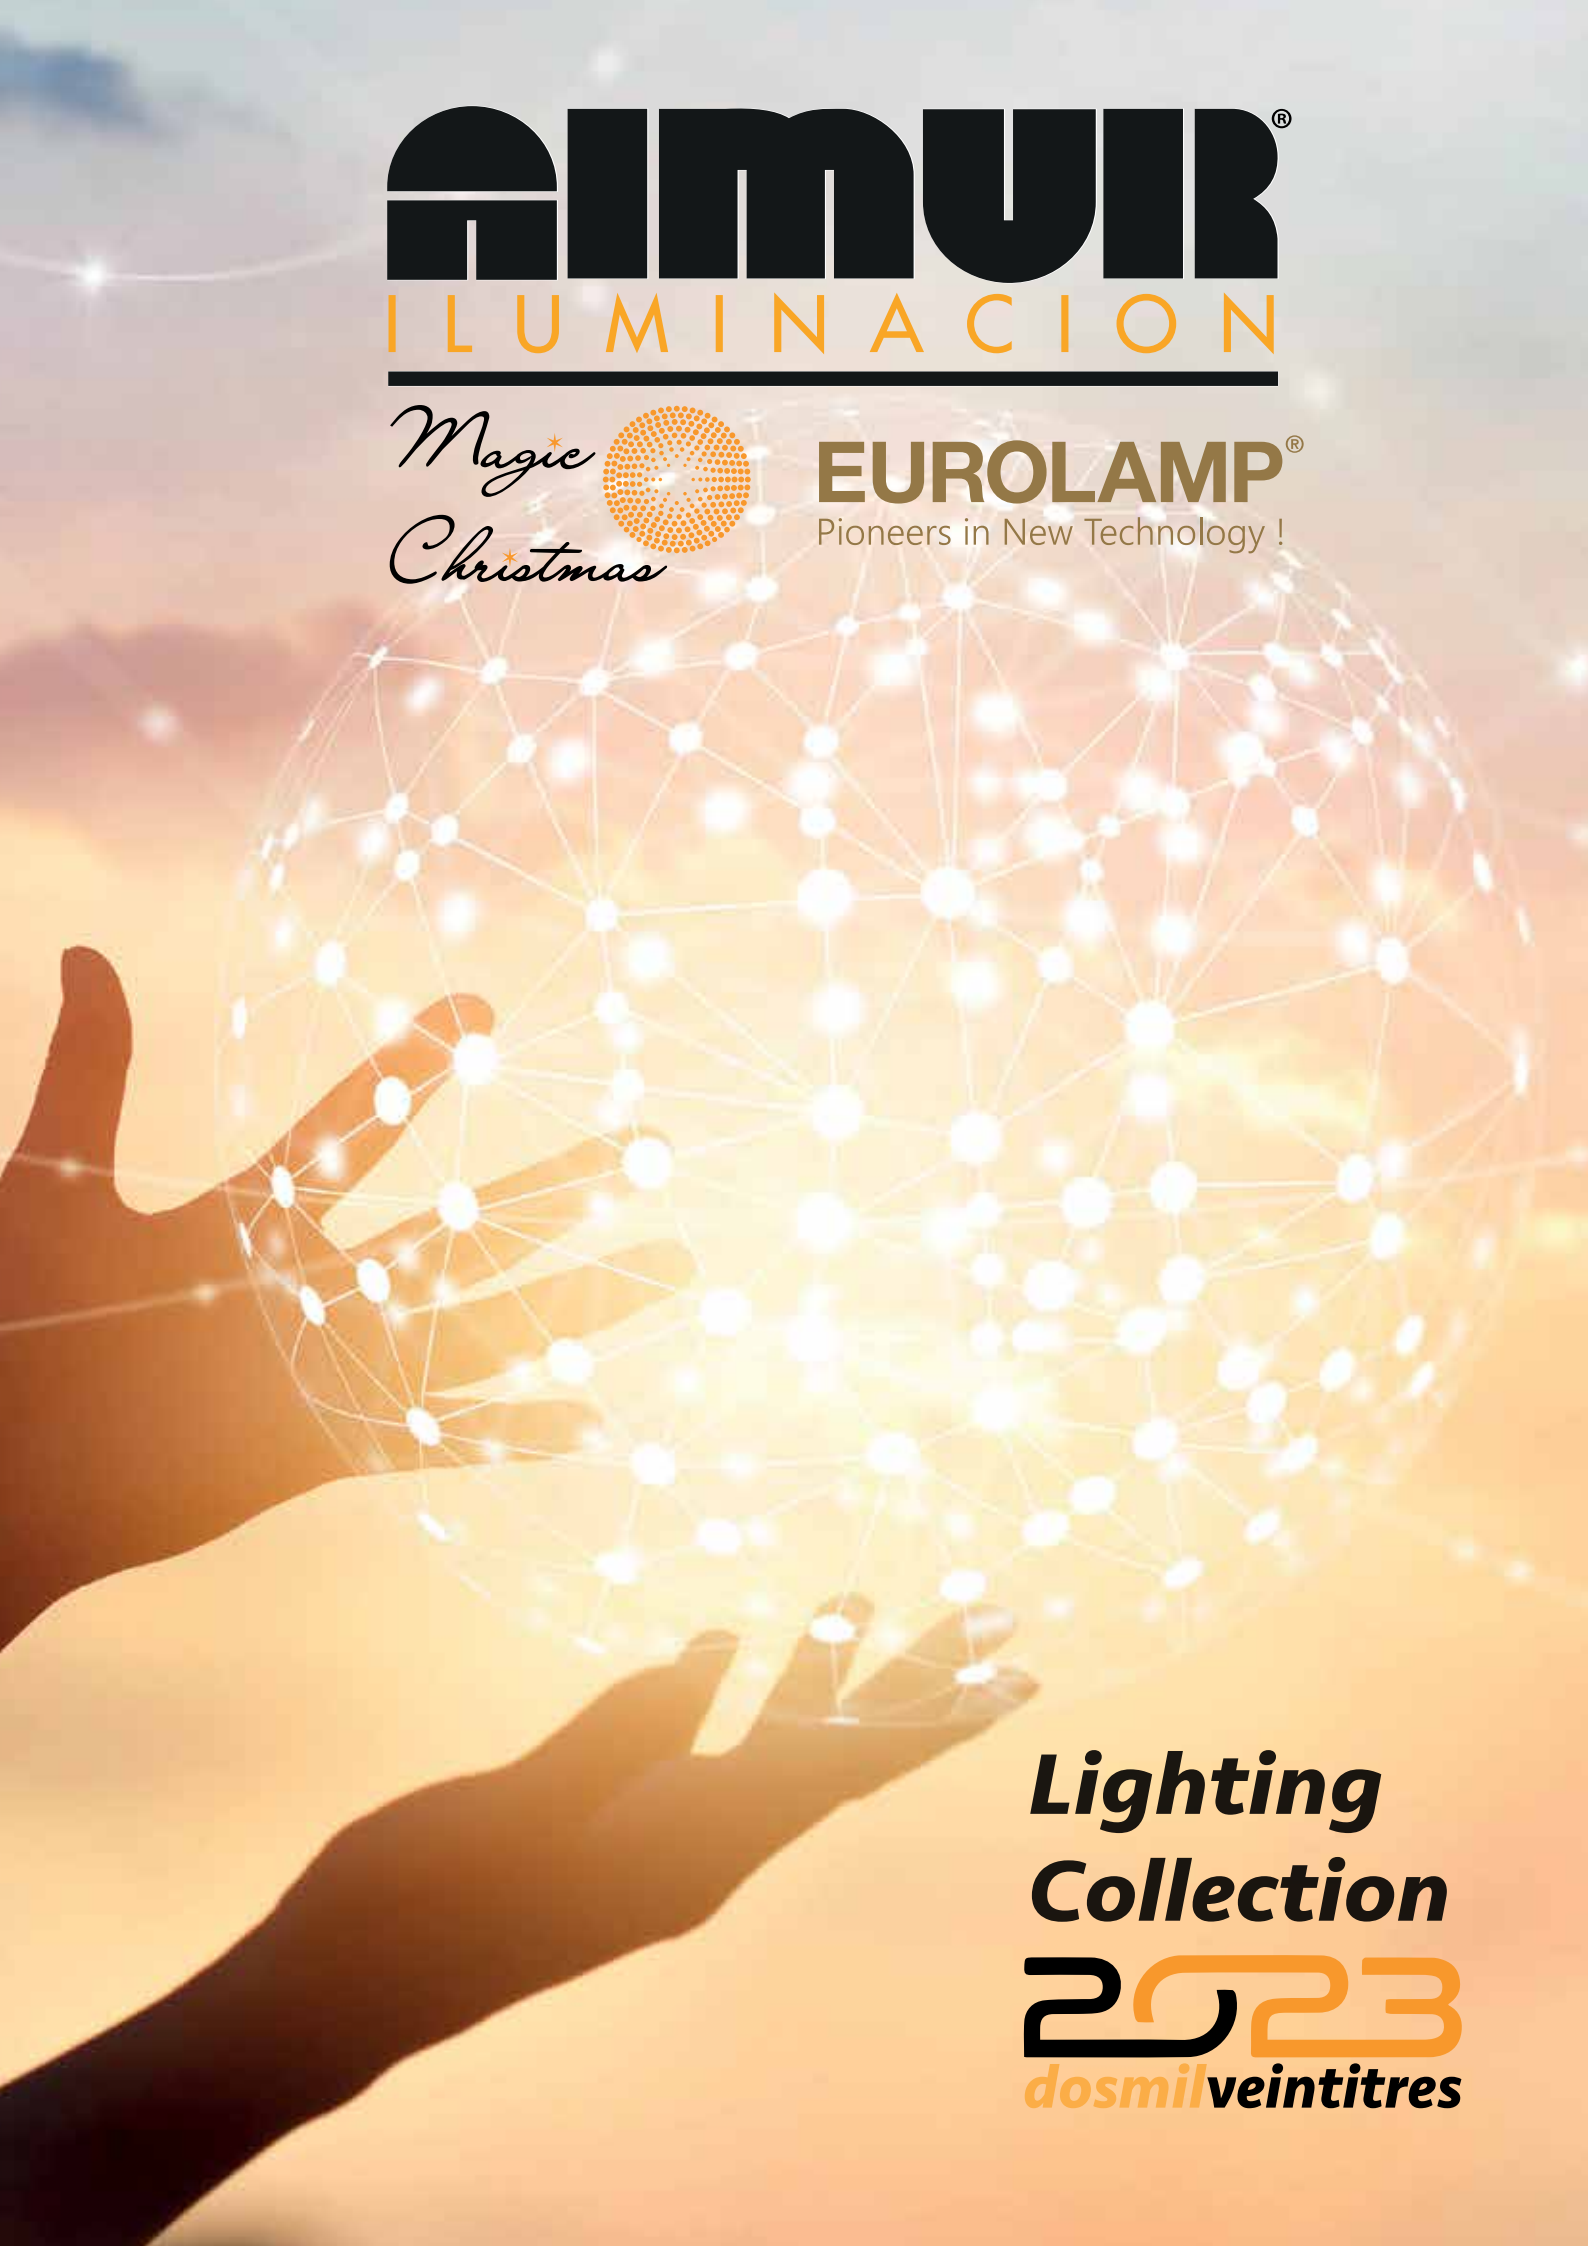

Lighting Collection

2023
dosmilveintitres



NEW ENERGY LABEL
NUEVA ETIQUETA ENÉRGETICA

A partir de septiembre de 2021, hay una nueva directiva europea que cambia la forma de cálculo de la clase energética y la forma en que aparece en el embalaje.

No se realizaron cambios en los productos en los que aparece la clase energética con la nueva etiqueta energética - la calidad y la eficiencia son las mismas. El cambio que se ha realizado, es la nueva forma de cálculo de la clase energética, según la Directiva Europea 2019/2015.


En el cálculo de la nueva clase energética se calculan muchos factores, como la directividad, la tensión de funcionamiento, etc.

After September 2021, there is a new European Directive which changes the way of calculation of the energy class, and the way which it appears on the packaging.


No changes were made at the products on which the energy class appears with the new energy label - the quality and the efficiency are the same. The change which has been made, is the new way of calculation of the energy class, according to the European Directive 2019/2015.


In the calculation for the new energy class, many factors are calculated, such as directivity, operating voltage, etc.

Etiqueta Energética Anterior
Previous Energy Label

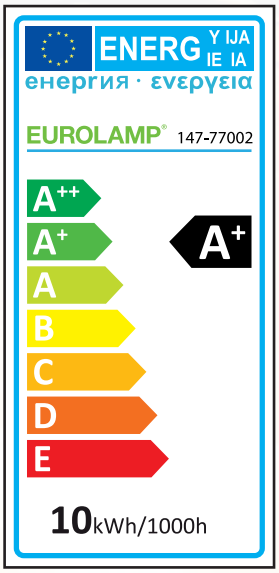

Nueva Etiqueta energética
New Energy Label

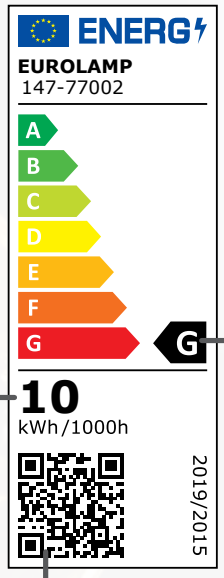



El consumo de energía del producto

The energy concumption of the product

La clase de eficiencia energética reescalada del producto

The rescaled energy efficiency class of the product

El código QR da acceso a la ficha técnica del producto

The QR code gives access to the data sheet of the product



EUROLAMP®
Pioneers in New Technology !

QUALITY CLASSIFICATIONS

PRO SERIES

Calidad Premium y uso de los más recientes avances tecnológicos, en un selecto grupo de productos aptos para uso profesional.
Mayores estándares de seguridad, una larga vida útil y hasta 5 años de garantía.

Premium Quality and use of the most recent technological advancements, in a selected group of products that are suitable for professional use.
Higher safety standards, a long lasting lifetime and up to 5 years of Warranty.

PLUS SERIES

Una serie de **Alta Calidad** con una amplia gama de productos aptos para uso doméstico, profesional e industrial.

A **Higher Quality** series with a wide range of products suitable for domestic, professional and industrial use.

VALUE SERIES

Esta categoría consiste en productos de **alta eficiencia y bajo costo**, que son adecuados para aplicaciones domésticas y comerciales generales.

This category consists of **high efficiency and low in cost** products, that are suitable for general domestic and commercial applications.

CONTENTS / INDICE



6-15 FILAMENT LED LAMPS



16-29 FILAMENT DECORATIVE LED LAMPS



30-59 COMMON SMD LED LAMPS



60-67 COMMON T TYPE LED LAMPS



68-73 LED SMD PAR30-38-56 LAMPS



74-83 SMART WI-FI



84-91 SPECIAL TECHNOLOGY LED LAMPS



92-101 PROFESSIONAL & INDUSTRIAL USE LED LAMPS



102-107 FLASH LIGHTS

LAMPS
BOMBILLAS

EUROLAMP®
Pioneers in New Technology !

2023
dosmilveintitres


108-118 LED LIGHTING PANELS


119-135 LED RECESSED FIXTURES


136-141 LED SURFACE MOUNTED FIXTURES


142-149 LED EMERGENCY LIGHTS


150-172 LED TAPES


173-178 CONTROLLERS FOR LED TAPES


179-184 DRIVERS FOR LED TAPES


185-197 ALUMINIUM PROFILES


198-210 LED LINEAR LIGHTING


211-237 PROFESSIONAL LIGHTING / INDOOR USE


238-243 PLASTER LIGHTS


244-269 LED TRACK LIGHTS

LIGHTING indoor
iluminacion Interior

CONTENTS / INDICE



270-279 LED CEILING SPOTS



280-287 ACCESORIES/CHRISTMAS



288-296 LED CEILING FLUO-RESCENT LIGHTS



297-307 LED FLOOD LIGHTS



308-311 LED SOLAR FLOOD LIGHTS



312-316 LED PROJECTOR LIGHTS SPORTS



317-318 LED GAS STATION LIGHTS



319-322 LED STREET LIGHTS



323-324 HI BAY LED

LIGHTING industrial
iluminacion industrial

EUROLAMP®
Pioneers in New Technology !

2023
dosmilveintitres



325-347 OUTDOOR SURFACE LED LIGHTING



349-355 WALL MOUNTED GU10 LED LIGHTS



356-357 SWIMMING POOL LED LIGHTS



358-361 SOLAR LED PANEL LIGHTS



361-364 WALL MOUNTED E27 FIXTURES



365-367 RECESSED FLOOR LED LIGHT



368-371 GARDEN SPOT GU10 LED LIGHTS



372-379 WALL/COLUMN LIGHTS LED & E27



380-381 PLASTIC PMMA LED GLOBES WIRELESS

LIGHTING outdoor
iluminacion exterior


Martini
Champagne
WHISKY

CROSS Filament



Este grupo de lámparas consiguen un CRI>90 y ofrece la reproducción cromática más realista en comparación con las lámparas de filamento simples. Además, ofrece una mayor calidad de iluminación sin sombras ni reflejos.

This group of lamps support a rate indicator CRI>90 and provides a genuine color yield in relation to ordinary Filament lamps. Furthermore, it offers high quality lighting neutralizing shadows and reflections.

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
A60 / A67 - E27

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**





CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE	NOT DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		360°	25.000	25,000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78001	5207227030963	F	A60	4.5W	40W	6500K	480	60x106mm	0.047 kg	1/10/50	5
E.147-78002	5207227030970	E	A60	7W	60W	6500K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78003	5207227037429	E	A60	9W	75W	6500K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78005	5207227030987	D	A67	11W	105W	6500K	1600	67x121mm	0.064 kg	1/10/50	5
E.147-78011	5207227037436	F	A60	4.5W	40W	4000K	480	60x106mm	0.047 kg	1/10/50	5
E.147-78012	5207227030994	E	A60	7W	60W	4000K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78013	5207227037450	E	A60	9W	75W	4000K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78015	5207227031007	D	A67	11W	105W	4000K	1600	67x121mm	0.064 kg	1/10/50	5
E.147-78031	5207227031052	F	A60	4.5W	40W	3000K	480	60x106mm	0.047 kg	1/10/50	5
E.147-78032	5207227031069	E	A60	7W	60W	3000K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78033	5207227031076	E	A60	9W	75W	3000K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78035	5207227031083	D	A67	11W	105W	3000K	1600	67x121mm	0.064 kg	1/10/50	5
E.147-78021	5207227031014	F	A60	4.5W	40W	2700K	480	60x106mm	0.047 kg	1/10/50	5
E.147-78022	5207227031021	E	A60	7W	60W	2700K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78023	5207227031038	E	A60	9W	75W	2700K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78025	5207227031045	D	A67	11W	105W	2700K	1600	67x121mm	0.064 kg	1/10/50	5

DIMMABLE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78072	5207227031137	E	A60	7W	60W	3000K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78076	5207227031915	E	A60	9W	75W	3000K	1100	60x106mm	0.047 kg	1/10/50	5
E.147-78077	5207227056949	D	A67	11W	105W	6500K	1600	67x121mm	0.066 kg	1/10/50	5
E.147-78078	5207227056970	D	A67	11W	105W	4000K	1600	67x121mm	0.066 kg	1/10/50	5
E.147-78079	5207227057007	D	A67	11W	105W	3000K	1600	67x121mm	0.066 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
A60 / A67 - E27 / FROST


MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78091	5207227036156	F	A60	4.5W	40W	3000K	480	60x106mm	0.047 kg	1/10/50	5
E.147-78092	5207227036163	E	A60	7W	60W	3000K	806	60x106mm	0.047 kg	1/10/50	5
E.147-78093	5207227036170	E	A60	9W	75W	3000K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78095	5207227064166	D	A67	11W	105W	3000K	1600	67x121mm	0.064 kg	1/10/50	5

A60 / A67 - B22


MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT 220-240V 50/60Hz | BASE B22 | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78042	5207227031090	E	A60	9W	75W	6500K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78043	5207227031106	D	A67	11W	105W	6500K	1600	67x121mm	0.064 kg	1/10/50	5
E.147-78062	5207227031113	E	A60	9W	75W	3000K	1055	60x106mm	0.048 kg	1/10/50	5
E.147-78063	5207227031120	D	A67	11W	105W	3000K	1600	67x121mm	0.064 kg	1/10/50	5

DIMMABLE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78047	5207227117305	D	A60	11W	105W	6500K	1600	67x121mm	0.044 kg	1/10/50	5
E.147-78067	5207227117336	D	A67	11W	105W	3000K	1600	67x121mm	0.066 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
C37 - E14

TARIFA PVP

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78101	5207227036194	F	C37	4.5W	40W	6500K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78102	5207227036200	E	C37	6.5W	60W	6500K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78110	5207227036231	F	C37	2.5W	25W	4000K	250	35x98mm	0.022 kg	1/10/50	5
E.147-78111	5207227036248	F	C37	4.5W	40W	4000K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78112	5207227036255	E	C37	6.5W	60W	4000K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78120	5207227036286	F	C37	2.5W	25W	3000K	250	35x98mm	0.022 kg	1/10/50	5
E.147-78121	5207227036293	F	C37	4.5W	40W	3000K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78122	5207227036309	E	C37	6.5W	60W	3000K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78130	5207227036330	F	C37	2.5W	25W	2700K	250	35x98mm	0.022 kg	1/10/50	5
E.147-78131	5207227036347	F	C37	4.5W	40W	2700K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78132	5207227036354	E	C37	6.5W	60W	2700K	806	35x98mm	0.023 kg	1/10/50	5

DIMMABLE
• C37 / F37 - E14

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78153	5207227064173	E	C37	6.5W	60W	6500K	806	35x98mm	0.013 kg	1/10/50	5
E.147-78173	5207227036408	E	C37	6.5W	60W	3000K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78183	5207227143298	E	C37	6.5W	60W	2700K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78176	5207227073892	F	F37	4.5W	40W	2700K	480	35x119mm	0.027 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
C67 - E14 / FROST


MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78104	5207227036217	F	C37	4.5W	**40W**	6500K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78105	5207227036224	E	C37	6.5W	**60W**	6500K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78114	5207227036262	F	C37	4.5W	**40W**	4000K	480	35x98mm	0.023 kg	1/10/50	5
E.147-78115	5207227036279	E	C37	6.5W	**60W**	4000K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78124	5207227036316	F	C37	4.5W	**40W**	3000K	480	35x98mm	0.022 kg	1/10/50	5
E.147-78125	5207227036323	E	C37	6.5W	**60W**	3000K	806	35x98mm	0.023 kg	1/10/50	5

DIMMABLE
• C37 - E14 / FROST


MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78152	5207227055812	F	C37	4.5W	**40W**	6500K	480	35x98mm	0.023 kg	1/10/50	5
E.147-78154	5207227064180	E	C37	6.5W	**60W**	6500K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78162	5207227055829	F	C37	4.5W	**40W**	4000K	480	35x98mm	0.023 kg	1/10/50	5
E.147-78164	5207227064197	E	C37	6.5W	**60W**	4000K	806	35x98mm	0.023 kg	1/10/50	5
E.147-78172	5207227036392	F	C37	4.5W	**40W**	3000K	480	35x98mm	0.023 kg	1/10/50	5
E.147-78174	5207227064203	E	C37	6.5W	**60W**	3000K	806	35x98mm	0.023 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
G45 / E14 & E27

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**






CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78211	5207227036439	F	G45	4.5W	40W	4000K	480	45x78mm	0.024 kg	1/10/50	5
E.147-78212	5207227036446	E	G45	6.5W	60W	4000K	806	45x78mm	0.024 kg	1/10/50	5
E.147-78221	5207227036460	F	G45	4.5W	40W	3000K	480	45x78mm	0.024 kg	1/10/50	5
E.147-78222	5207227036477	E	G45	6.5W	60W	3000K	806	45x78mm	0.024 kg	1/10/50	5
E.147-78231	5207227036507	F	G45	4.5W	40W	2700K	480	45x78mm	0.024 kg	1/10/50	5
E.147-78232	5207227036514	E	G45	6.5W	60W	2700K	806	45x78mm	0.024 kg	1/10/50	5



CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78251	5207227036545	F	G45	4.5W	40W	4000K	480	45x78mm	0.027 kg	1/10/50	5
E.147-78252	5207227036552	E	G45	6.5W	60W	4000K	806	45x78mm	0.027 kg	1/10/50	5
E.147-78260	5207227064258	F	G45	2.5W	25W	3000K	250	45x78mm	0.027 kg	1/10/50	5
E.147-78261	5207227036569	F	G45	4.5W	40W	3000K	480	45x78mm	0.027 kg	1/10/50	5
E.147-78262	5207227036576	E	G45	6.5W	60W	3000K	806	45x78mm	0.027 kg	1/10/50	5
E.147-78291	5207227117367	F	G45	4.5W	40W	2700K	480	45x78mm	0.027 kg	1/10/50	5
E.147-78292	5207227117381	E	G45	6.5W	60W	2700K	806	45x78mm	0.027 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
G45 / E14 & E27 / DIMMABLE

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT 220-240V 50/60Hz | DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25,000 hr | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	BASE	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78272	5207227036590	E	E14	G45	6.5W	**60W**	3000K	806	45x82mm	0.027 kg	1/10/50	5
E.147-78282	5207227036606	E	E27	G45	6.5W	**60W**	3000K	806	45x82mm	0.027 kg	1/10/50	5

FROST
• G45 / E14 & E27

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT 220-240V 50/60Hz | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25,000 hr | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	BASE	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78224	5207227036484	F	E14	G45	4.5W	**40W**	3000K	480	45x82mm	0.024 kg	1/10/50	5
E.147-78264	5207227036583	F	E27	G45	4.5W	**40W**	3000K	480	45x82mm	0.027 kg	1/10/50	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS
G95 & G125 / E27




MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78421	5207227036637	E	G95	8W	75W	3000K	1055	95x142mm	0.102 kg	1/5/20	5
E.147-78422	5207227036644	D	G95	11W	105W	3000K	1600	95x142mm	0.102 kg	1/5/20	5
E.147-78451	5207227036675	E	G125	8W	75W	3000K	1055	125x180mm	0.180 kg	1/5/20	5
E.147-78452	5207227036682	D	G125	11W	105W	3000K	1600	125x180mm	0.180 kg	1/5/20	5

DIMMABLE
• G95 & G125 / E27


MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78460	5207227055836	D	G95	11W	105W	6500K	1600	95x140mm	0.102 kg	1/5/20	5
E.147-78461	5207227036699	D	G95	11W	105W	4000K	1600	95x140mm	0.102 kg	1/5/20	5
E.147-78471	5207227036712	D	G95	11W	105W	3000K	1600	95x140mm	0.102 kg	1/5/20	5
E.147-78472	5207227036729	D	G125	11W	105W	3000K	1600	125x180mm	0.180 kg	1/5/20	5

• LÁMPARAS DE FILAMENTO CRUZADO LED
• LED FILAMENT CROSSED LAMPS

G95 & G125/ E27 / MILKY

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78411	5207227036613	E	G95	8W	**75W**	4000K	1055	95x140mm	0.102 kg	1/5/20	5
E.147-78412	5207227036620	D	G95	11W	**105W**	4000K	1600	95x140mm	0.102 kg	1/5/20	5
E.147-78441	5207227036651	E	G125	8W	**75W**	4000K	1055	125x180mm	0.180 kg	1/5/20	5
E.147-78442	5207227036668	D	G125	11W	**105W**	4000K	1600	125x180mm	0.180 kg	1/5/20	5

DIMMABLE
• ST64 - E27

MATERIAL DE PRODUCCION: **VIDRIO CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78480	5207227057038	D	ST64	11W	**105W**	6500K	1600	64x140mm	0.067 kg	1/10/50	5
E.147-78481	5207227057069	D	ST64	11W	**105W**	4000K	1600	64x140mm	0.067 kg	1/10/50	5
E.147-78482	5207227036736	D	ST64	11W	**105W**	3000K	1600	64x140mm	0.067 kg	1/10/50	5



Filament

Filament DECO SERIES

GOLD GLASS


Vintage Edison



• LÁMPARAS DE FILAMENTO LED / LED FILAMENT LAMPS
• DECO SERIES / GOLD GLASS / DIMMABLE
ST64 / G95 / G125 - E27

MATERIAL DE PRODUCCION: **VIDRIO (EFECTO DORADO)**
PRODUCTION MATERIAL: **GLASS (GOLD COVER)**



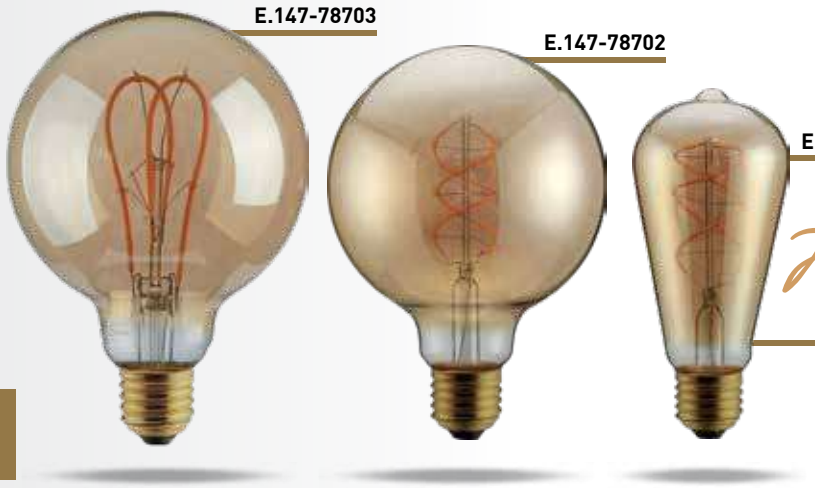

Filament DECO SERIES

CRI Ra >80

PLUS

VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		360°	15.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81804	E.147-78701*	5207227114427	G	ST64	5W	2000K	300	140x64mm	0.067 kg	1/10/50	2
E.147-81806	E.147-78702*	5207227017728	G	G95	5W	2000K	300	142x95mm	0.102 kg	1/5/20	2
E.147-81807	E.147-78703*	5207227017759	G	G125	5W	2000K	300	170x125mm	0.180 kg	1/5/20	2

• DECORATIVE / GOLD GLASS / DIMMABLE
A60 - E27

MATERIAL DE PRODUCCION: **VIDRIO (EFECTO DORADO)**
PRODUCTION MATERIAL: **GLASS (GOLD COVER)**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81801	E.147-78760*	5207227036743	E	A60	7W	2400K	806	106x60mm	0.030 kg	1/10/50	10

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• LÁMPARAS DE FILAMENTO LED / LED FILAMENT LAMPS
• DECORATIVE / GOLD GLASS / DIMMABLE
C37 - E14

MATERIAL DE PRODUCCION: **VIDRIO (EFECTO DORADO)**
PRODUCTION MATERIAL: **GLASS (GOLD COVER)**



CROSS Filament

CRI Ra >90

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	DIMMABLE	360°	25.000	25,000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81812	E.147-78765*	5207227036750	F	C37	4.5W	2400K	480	98x35mm	0.023 kg	1/10/50	10

• DECORATIVE / GOLD GLASS / DIMMABLE
G95 / G125 - E27

MATERIAL DE PRODUCCION: **VIDRIO (EFECTO DORADO)**
PRODUCTION MATERIAL: **GLASS (GOLD COVER)**



GOLD GLASS Filament

CRI Ra >80

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25,000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78770	5207227114458	E	G95	8W	2400K	1055	142x95mm	0.102 kg	1/5/20	5
E.147-78771	5207227114489	E	G125	8W	2400K	1055	180x125mm	0.180 kg	1/5/20	5

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• LÁMPARAS DE FILAMENTO LED / LED FILAMENT LAMPS
• DECORATIVE / GOLD GLASS / DIMMABLE
ST64 - E27




MATERIAL DE PRODUCCION: **VIDRIO (EFECTO DORADO)**
PRODUCTION MATERIAL: **GLASS (GOLD COVER)**



GOLD GLASS *Filament*

CRI Ra >80

PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-80930	5206139038982	F	ST64	10W	2500K	1050	140x64mm	0.069 kg	1/10/50	5

• DECORATIVE / GOLD GLASS / DIMMABLE
G95 / G125 / E27

MATERIAL DE PRODUCCIÓN: VIDRIO Y ACRÍLICO
PRODUCTION MATERIAL: **GLASS & ACRYLIC**










GOLD GLASS

CRI Ra >80

PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81820	5207227036767	G	G95	3.5W	2000K	120	145x95mm	0.232 kg	1/20	5
E.147-81823	5207227036774	G	G125	3.5W	2000K	120	165x125mm	0.267 kg	1/10	5
E.147-81824	5207227056185	G	DIAMOND	3.5W	2000K	120	175x125mm	0.267 kg	1/10	5
E.147-81826	5207227036781	G	ST64	3.5W	2000K	120	145x64mm	0.196 kg	1/50	5

• **LÁMPARAS LED** / LED LAMPS
• **DECORATIVE / GOLD GLASS / DIMMABLE**
P165 / G200 - E27

MATERIAL DE PRODUCCION**: VIDRIO Y ACRÍLICO**
PRODUCTION MATERIAL: **GLASS & ACRYLIC**

E.147-81832




E.147-81830



GOLD GLASS

CRI Ra >80

PLUS



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25,000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81832	5207227036804	G	P165	3.5W	2000K	120	165x303mm	0.906 kg	1/4	2
E.147-81830	5207227036798	G	G200	3.5W	2000K	120	200x241mm	0.964 kg	1/4	2

• LÁMPARAS DE FILAMENTO LED / LED FILAMENT LAMPS
• DECORATIVE / SMOKY DNA / DIMMABLE
G125 / S125 - E27

MATERIAL DE PRODUCCIÓN: VIDRIO Y ACRÍLICO
PRODUCTION MATERIAL: **GLASS & ACRYLIC**



E.147-78730



E.147-78731



E.147-78735



CRI Ra >80


PLUS


VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78730	5207227157103	G125	4W	1800K	55	125x164mm	0.220 kg	1/10	2
E.147-78731	5207227157127	G125	4W	1800K	55	125x164mm	0.213 kg	1/10	2
E.147-78735	5207227157141	S125	4W	1800K	55	125x163mm	0.229 kg	1/10	2


• LÁMPARAS LED SOFT FILAMENT / LED SOFT FILAMENT LAMPS
• DECORATIVE / FROST / DIMMABLE
E27

MATERIAL DE PRODUCCIÓN: PLÁSTICO
PRODUCTION MATERIAL: **PLASTIC**

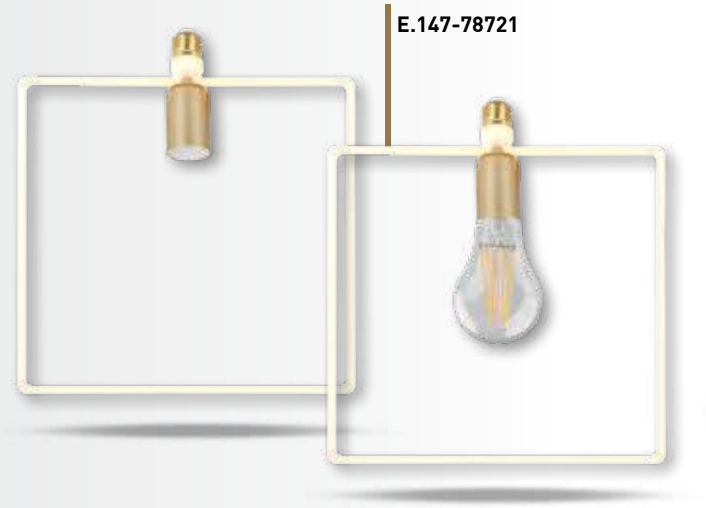

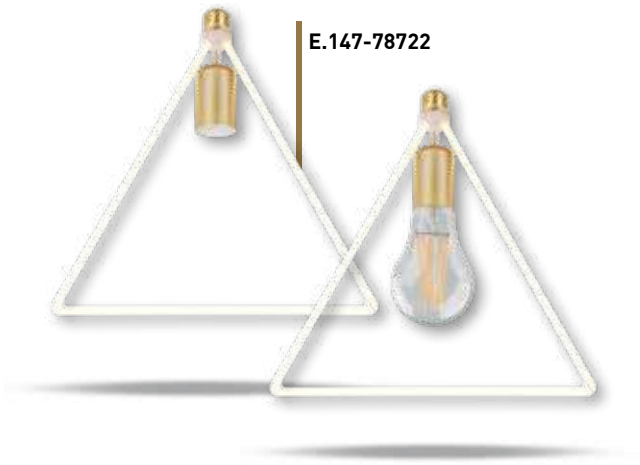

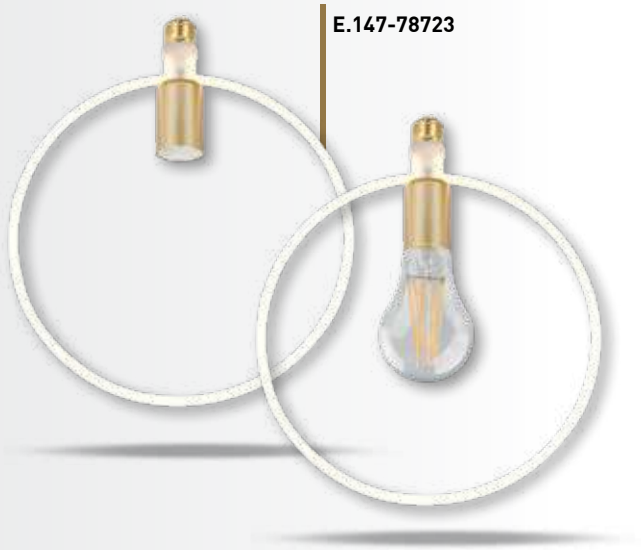

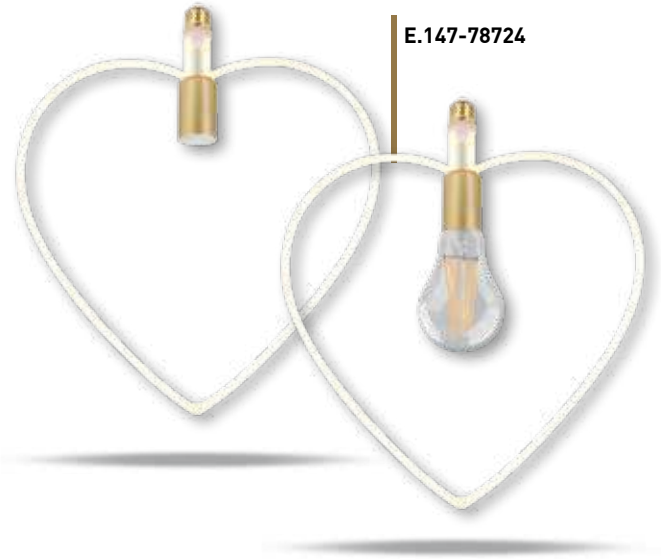

- Integra portalámparas E27 para conexión de lámpara (no incluida)
- Integrades E27 lampholder for lamp connection (not included in the package)

CRI Ra >80 | PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25,000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78721	5207227111556	E	SQUARE	12W	2700K	1500	335x290x40mm	0.340 kg	1/10	2
E.147-78722	5207227111570	E	TRIANGLE	12W	2700K	1500	290x290x40mm	0.300 kg	1/10	2
E.147-78723	5207227111594	E	CIRCLE	12W	2700K	1500	415x350x40mm	0.300 kg	1/10	2
E.147-78724	5207227111617	E	HEART	12W	2700K	1500	340x275x40mm	0.380 kg	1/10	2


- **LÁMPARA DECORATIVA «MOVE ME»**
- DECORATIVE LAMPS «MOVE ME»


G120 - E27



- **Tienen una cabeza de metal móvil con propiedades magnéticas**
- They have a movable metal head with magnetic properties.



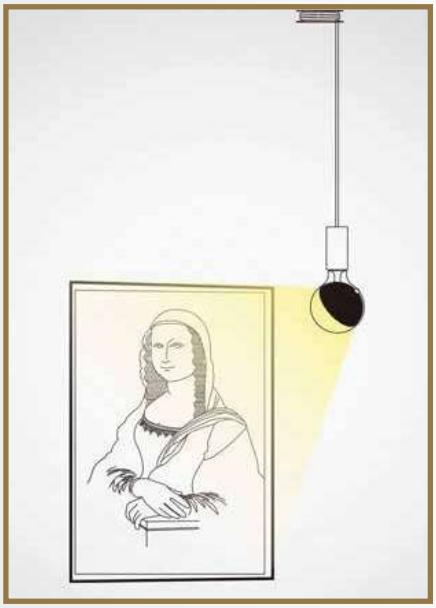

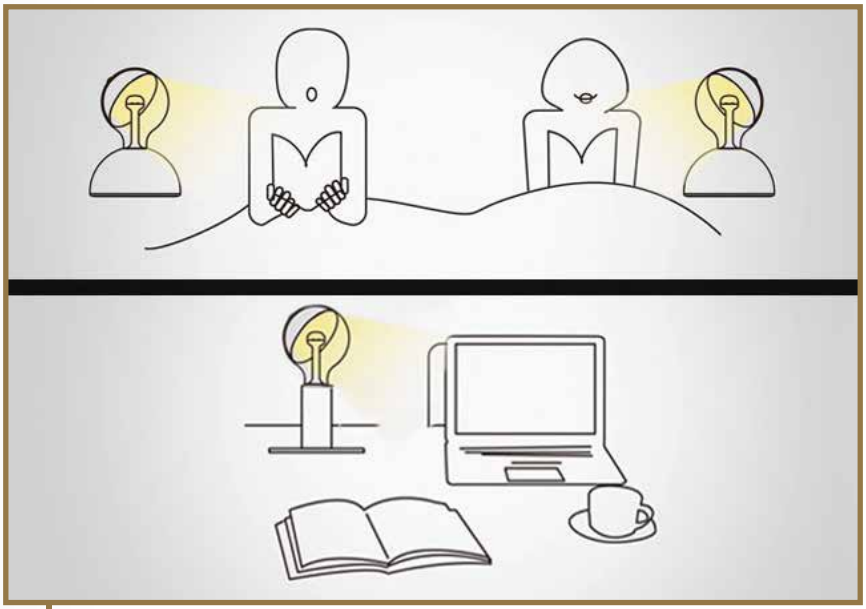


- **Al mover la cabeza, el ángulo de reflexión de la luz también cambia.**
- Moving the head, the angle of light reflection is changing.

• LÁMPARA DECORATIVA «MOVE ME»
• DECORATIVE LAMPS «MOVE ME»
G120 - E27

MATERIAL DE PRODUCCIÓN: VIDRIO Y ALUMINIO
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**

move me

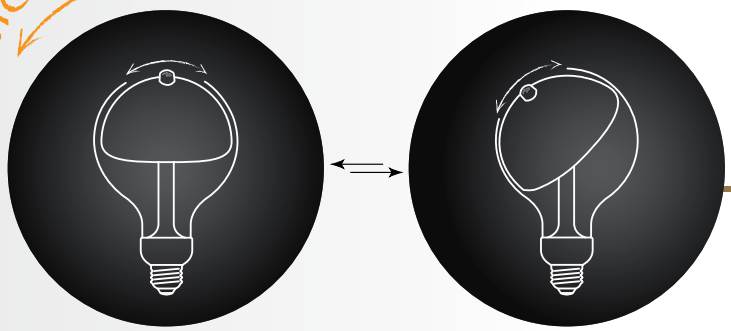

• Si el difusor está en la parte superior, el ángulo es de 307º

• If the diffuser is on the top, the beam angle is 307°

• Si el difusor está en el lateral, el ángulo es de 81º

• If the diffuser is on the side, the beam angle is 81°

CRI Ra >90

Esta bombilla es reproduce un indicador CRI>90 y proporciona un rendimiento de color genuino en relación con las bombillas de filamento ordinarias. Además, ofrece una iluminación de alta calidad que neutraliza sombras y reflejos.

This bulb supports a rate indicator CRI>90 and provides a genuine color yield in relation to ordinary Filament bulbs. Furthermore, it offers high quality lighting neutralizing shadows and reflections.


E.147-81890
Transparente / Plata
Clear / Silver



E.147-81891
Transparente / Negro
Clear / Black



PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	GUARANTEE
220-240V 50/60Hz	E27		80-307°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81890	5207227061776	G	G120	5.5W	2700K	450	120x186mm	0.345 kg	1/20	2
E.147-81891	5207227083341	G	G120	5.5W	2700K	450	120x186mm	0.345 kg	1/20	2

• LÁMPARA DE SOBREMESA DECORATIVA «MOVE ME»
• DECORATIVE TABLE LIGHT«MOVE ME»
E27



MATERIAL DE PRODUCCIÓN: PLÁSTICO Y COBRE
PRODUCTION MATERIAL: **PLASTIC & COPPER**

- **Para Combinar con Bombilla «Move me»**
- **In combination with «Move me» lamp**



* La bombilla no está incluida
* The lamp is not included in the package

VOLT	BASE	IP20	OPERATING TEMPERATURE	2 YEARS GUARANTEE
220-240V 50/60Hz	E27		+45°C -10°C	

CODE	BARCODE	POWER	BASE	CONNECTION TYPE	CABLE EXT.	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81895	5207227083358	**10W/LED**	E27	ENCHUFE/ PLUG	**150cm**	95x170mm	0.468 kg	1/20	2

MATERIAL DE PRODUCCIÓN: PLÁSTICO Y COBRE
PRODUCTION MATERIAL: **PLASTIC & COPPER**

- **Para Combinar con Bombilla «Move me»**
- **In combination with «Move me» lamp**



* La bombilla no está incluida
* The lamp is not included in the package

VOLT	BASE	IP20	OPERATING TEMPERATURE	2 YEARS GUARANTEE
220-240V 50/60Hz	E27		+45°C -10°C	

CODE	BARCODE	POWER	BASE	CONNECTION TYPE	CABLE EXT.	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81896	5207227083365	**10W/LED**	E27	ENCHUFE/ PLUG	**150cm**	60x160mm	0.495 kg	1/20	2

• LUMINARIA COLGANTE DECORATIVA «MOVE ME»
• DECORATIVE PENDANT LUMINAIRE «MOVE ME»
E27

MATERIAL DE PRODUCCIÓN: PLÁSTICO Y COBRE
PRODUCTION MATERIAL: **PLASTIC & COPPER**



- **Para Combinar con Bombilla «Move me»**
- **In combination with «Move me» lamp**

* La bombilla no está incluida
* The lamp is not included in the package

VOLT 220-240V 50/60Hz | BASE E27 | IP20 | OPERATING TEMPERATURE +45°C -10°C | 2 YEARS GUARANTEE

CODE	BARCODE	POWER	BASE	CONNECTION TYPE	CABLE EXT.	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81897	5207227083372	10W/LED	E27	CLEMA / TERMINAL BLOCK	150cm	105x1500mm	0.349 kg	1/20	2

- **BOMBILLAS EDISON** / EDISON LAMPS
- **DECORATIVE / VINTAGE EDISON / DIMMABLE**

G95 / G125 / ST64 - E27

MATERIAL DE PRODUCCIÓN: VIDRIO
PRODUCTION MATERIAL: **GLASS**



E.147-88247



E.147-88246



E.147-88250



Vintage Edison

PLUS

VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	OPERATING TEMPERATURE	2 YEARS GUARANTEE
220-240V 50/60Hz	E27		360°	1.000	2.000 hr	+45°C -30°C	

CODE	BARCODE	TYPE	WATT	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-88247	5206139097545	G125	40W	120	125x175mm	0.164 kg	1/25	5
E.147-88246	5206139077783	G95	25W	140	95x135mm	0.092 kg	1/30	5
E.147-88250	5206139068873	ST64	25W	140	64x140mm	0.083 kg	1/10/100	5

• **BOMBILLAS EDISON** / EDISON LAMPS
• **DECORATIVE / VINTAGE EDISON / DIMMABLE**
A110 / B118 - E27

MATERIAL DE PRODUCCIÓN: VIDRIO
PRODUCTION MATERIAL: **GLASS**





Vintage Edison

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	1.000	2.000 hr	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	TYPE	WATT	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-88244	5206139054081	A110	60W	120	110x235mm	0.210 kg	1/8	2
E.147-88245	5206139054111	B118	60W	140	115x265mm	0.264 kg	1/8	2



SMD
COMMON LAMPS

LED





- BOMBILLAS LED SMD
- LED SMD LAMPS

A60 - E27 / PRO SERIES



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-265V 50/60Hz	E27	NOT DIMMABLE	230°	25.000	30,000 hr	>80	0.5 Sec	+45°C -30°C	5 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77111	5207227174711	C	A60	5W	60W	6500K	800	60x107mm	0.043 kg	1/10/50	10
E.147-77112	5207227174728	C	A60	6.5W	75W	6500K	1040	60x107mm	0.043 kg	1/10/50	10
E.147-77113	5207227174735	C	A60	9.5W	100W	6500K	1520	60x107mm	0.053 kg	1/10/50	10
E.147-77121	5207227174766	C	A60	5W	60W	4000K	800	60x107mm	0.043 kg	1/10/50	10
E.147-77122	5207227174773	C	A60	6.5W	75W	4000K	1040	60x107mm	0.043 kg	1/10/50	10
E.147-77123	5207227174780	C	A60	9.5W	100W	4000K	1520	60x107mm	0.053 kg	1/10/50	10
E.147-77131	5207227174810	C	A60	5W	60W	3000K	800	60x107mm	0.043 kg	1/10/50	10
E.147-77132	5207227174827	C	A60	6.5W	75W	3000K	1040	60x107mm	0.043 kg	1/10/50	10
E.147-77133	5207227174834	C	A60	9.5W	100W	3000K	1520	60x107mm	0.053 kg	1/10/50	10


PRO SERIES



• BOMBILLAS LED SMD
• LED SMD LAMPS
A60 / A80 - E27 / PLUS SERIES

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	300°	25.000	25,000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77000	5207227112560	G	A60	6W	**40W**	6500K	480	60x107mm	0.043 kg	1/10/50	10
E.147-77001	5207227112591	G	A60	8W	**55W**	6500K	650	60x107mm	0.043 kg	1/10/50	10
E.147-77002	5207227112621	G	A60	10W	**60W**	6500K	810	60x108mm	0.043 kg	1/10/50	10
E.147-77003	5207227112652	F	A60	12W	**75W**	6500K	1055	60x110mm	0.053 kg	1/10/50	10
E.147-77004	5207227112683	F	A60	15W	**105W**	6500K	1521	65x128mm	0.053 kg	1/10/50	10
E.147-77006	5207227115660	E	A60	20W	**120W**	6500K	2040	60x127mm	0.072 kg	1/10/50	5
E.147-77007	5207227115844	E	A80	24W	**155W**	6500K	2800	80x161mm	0.130 kg	1/10/30	5

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77010	5207227112867	G	A60	6W	**40W**	4000K	480	60x107mm	0.043 kg	1/10/50	10
E.147-77011	5207227112898	G	A60	8W	**55W**	4000K	650	60x107mm	0.043 kg	1/10/50	10
E.147-77012	5207227112928	G	A60	10W	**60W**	4000K	810	60x108mm	0.043 kg	1/10/50	10
E.147-77013	5207227112959	F	A60	12W	**75W**	4000K	1055	60x110mm	0.053 kg	1/10/50	10
E.147-77014	5207227112980	F	A60	15W	**105W**	4000K	1521	65x128mm	0.053 kg	1/10/50	10
E.147-77016	5207227116810	E	A60	20W	**120W**	4000K	2040	60x127mm	0.072 kg	1/10/50	5
E.147-77017	5207227115721	E	A80	24W	**155W**	4000K	2800	80x161mm	0.130 kg	1/10/30	5

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77030	5207227112713	G	A60	6W	**40W**	2700K	480	60x107mm	0.043 kg	1/10/50	10
E.147-77031	5207227112744	G	A60	8W	**55W**	2700K	650	60x107mm	0.043 kg	1/10/50	10
E.147-77032	5207227112775	G	A60	10W	**60W**	2700K	810	60x108mm	0.043 kg	1/10/50	10
E.147-77033	5207227112805	F	A60	12W	**75W**	2700K	1055	60x110mm	0.053 kg	1/10/50	10
E.147-77034	5207227112836	F	A60	15W	**105W**	2700K	1521	65x128mm	0.053 kg	1/10/50	10
E.147-77036	5207227115691	E	A60	20W	**120W**	2700K	2040	60x127mm	0.072 kg	1/10/50	5
E.147-77037	5207227116841	E	A80	24W	**155W**	2700K	2800	80x161mm	0.130 kg	1/10/30	5

- BOMBILLAS LED SMD
- LED SMD LAMPS

A60 - E27 / BLISTER

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**







VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	300°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84402	5206139991027	G	A60	8W	**55W**	6500K	650	60x110mm	0.041 kg	1/10/50	10
E.147-84404	5206139015280	G	A60	11W	**70W**	6500K	920	60x110mm	0.041 kg	1/10/50	10
E.147-84405	5206139040480	F	A60	13W	**80W**	6500K	1170	60x110mm	0.048 kg	1/10/50	10
E.147-84406	5207227058660	F	A60	15W	**105W**	6500K	1521	60x116mm	0.075 kg	1/10/50	10
E.147-84412	5206139991126	G	A60	8W	**55W**	2700K	650	60x110mm	0.041 kg	1/10/50	10
E.147-84414	5206139015297	G	A60	11W	**70W**	2700K	920	60x110mm	0.041 kg	1/10/50	10
E.147-84415	5206139040664	F	A60	13W	**80W**	2700K	1170	60x110mm	0.048 kg	1/10/50	10
E.147-84416	5207227058691	F	A60	15W	**105W**	2700K	1521	65x128mm	0.048 kg	1/10/50	10




• BOMBILLAS LED SMD
• LED SMD LAMPS

A55 / A60 / A65 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	260°	15.000	15.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77000	5207227111846	G	A55	6W	**40W**	6500K	480	55x98mm	0.031 kg	1/20/100	10
E.180-77001	5207227111877	F	A60	9W	**60W**	6500K	806	60x108mm	0.040 kg	1/20/100	10
E.180-77002	5207227111907	F	A60	12W	**75W**	6500K	1060	60x112mm	0.045 kg	1/20/100	10
E.180-77003	5207227111938	F	A65	15W	**95W**	6500K	1450	65x118mm	0.051 kg	1/20/100	10
E.180-77006	5207227072499	F	A65	20W	**120W**	6500K	1800	65x128mm	0.120 kg	1/20/100	10

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77010	5207227117411	G	A55	6W	**40W**	4000K	480	55x98mm	0.031 kg	1/20/100	10
E.180-77011	5207227117442	F	A60	9W	**60W**	4000K	806	60x108mm	0.040 kg	1/20/100	10
E.180-77012	5207227111969	F	A60	12W	**75W**	4000K	1060	60x112mm	0.045 kg	1/20/100	10
E.180-77013	5207227111990	F	A65	15W	**95W**	4000K	1450	65x118mm	0.051 kg	1/20/100	10
E.180-77016	5207227072512	F	A65	20W	**120W**	4000K	1800	65x128mm	0.120 kg	1/20/100	10

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77020	5207227117473	G	A55	6W	**40W**	3000K	480	55x98mm	0.031 kg	1/20/100	10
E.180-77021	5207227117503	F	A60	9W	**60W**	3000K	806	60x108mm	0.040 kg	1/20/100	10
E.180-77022	5207227112119	F	A60	12W	**75W**	3000K	1060	60x112mm	0.045 kg	1/20/100	10
E.180-77023	5207227112140	F	A65	15W	**95W**	3000K	1450	65x118mm	0.051 kg	1/20/100	10
E.180-77026	5207227072536	F	A65	20W	**120W**	3000K	1800	65x128mm	0.120 kg	1/20/100	10

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77030	5207227117534	G	A55	6W	**40W**	2700K	480	55x98mm	0.031 kg	1/20/100	10
E.180-77031	5207227112027	F	A60	9W	**60W**	2700K	806	60x108mm	0.040 kg	1/20/100	10
E.180-77032	5207227112058	F	A60	12W	**75W**	2700K	1060	60x112mm	0.045 kg	1/20/100	10
E.180-77033	5207227112089	F	A65	15W	**95W**	2700K	1450	65x118mm	0.051 kg	1/20/100	10
E.180-77036	5207227072550	F	A65	20W	**120W**	2700K	1800	65x128mm	0.120 kg	1/20/100	10


- BOMBILLAS LED SMD
- LED SMD LAMPS

12V • 24V • 42V - AC/DC A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**







VOLT 12-24V AC/DC 50/60Hz | VOLT 42V AC 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 230° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77180	5207227116933	G	A60	10W	**60W**	6500K	806	60x116mm	0.066 kg	1/10/50	5
E.147-77182	5207227116940	G	A60	10W	**60W**	3000K	806	60x116mm	0.066 kg	1/10/50	5

- BOMBILLAS TUBULARES LED SMD
- LED TUBULAR SMD LAMPS

T40 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 260° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77463	5207227117008	F	T40	13W	**80W**	6500K	1170	44x138mm	0.076 kg	1/10/50	5
E.147-77464	5207227117015	F	T40	13W	**80W**	4000K	1170	44x138mm	0.076 kg	1/10/50	5
E.147-77465	5207227117022	F	T40	13W	**80W**	3000K	1170	44x138mm	0.076 kg	1/10/50	5

• BOMBILLAS LED SMD
• LED SMD LAMPS

CANDLE C37 - E14 / PRO SERIES

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-265V 50/60Hz	E14	NOT DIMMABLE	200°	25.000	30.000 hr	>80	0.5 Sec	+45°C -30°C	5 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77207	5207227174858	D	C37	5.8W	**70W**	6500K	806	37x100mm	0.028 kg	1/10/50	10
E.147-77208	5207227174865	D	C37	5.8W	**70W**	4000K	806	37x100mm	0.028 kg	1/10/50	10
E.147-77209	5207227174872	D	C37	5.8W	**70W**	3000K	806	37x100mm	0.028 kg	1/10/50	10

PRO SERIES




- BOMBILLAS LED SMD
- LED SMD LAMPS

CANDLE C37 - E14



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	200°	25.000	25,000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77203	5207227113345	G	C37	5W	**45W**	6500K	400	37x100mm	0.028 kg	1/10/50	10
E.147-77204	5207227113376	G	C37	5W	**45W**	4000K	400	37x100mm	0.028 kg	1/10/50	10
E.147-77206	5207227113406	G	C37	5W	**45W**	2700K	400	37x100mm	0.028 kg	1/10/50	10
E.147-77211	5207227113437	F	C37	7W	**60W**	6500K	630	37x100mm	0.028 kg	1/10/50	10
E.147-77212	5207227113468	F	C37	7W	**60W**	4000K	630	37x100mm	0.028 kg	1/10/50	10
E.147-77214	5207227113499	F	C37	7W	**60W**	2700K	630	37x100mm	0.028 kg	1/10/50	10

MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	200°	25.000	25,000 hr	>80	0.5 Sec	+45°C -30°C	3 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77221	5207227072574	F	C37	10W	**75W**	6500K	1000	37x109mm	0.057 kg	1/10/50	10
E.147-77222	5207227072581	F	C37	10W	**75W**	4000K	1000	37x109mm	0.057 kg	1/10/50	10
E.147-77224	5207227072598	F	C37	10W	**75W**	2700K	1000	37x109mm	0.057 kg	1/10/50	10

- BOMBILLAS LED SMD
- LED SMD LAMPS

CANDLE C37 - E14 / DIMMABLE



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



PLUS


VOLT 220-240V 50/60Hz | BASE E14 | DIMMABLE | BEAM ANGLE 200° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84462	5206139039866	F	C37	7W	60W	6500K	630	37x100mm	0.030 kg	1/10/50	10
E.147-84464	5206139039903	F	C37	7W	60W	2700K	630	37x100mm	0.030 kg	1/10/50	10

CANDLE TAIL F37 - E14



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



PLUS


VOLT 220-240V 50/60Hz | BASE E14 | NOT DIMMABLE | BEAM ANGLE 200° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77261	5207227116957	F	F37	7W	60W	4000K	630	36x113mm	0.035 kg	1/10/50	5
E.147-77263	5207227116964	F	F37	7W	60W	2700K	630	36x113mm	0.035 kg	1/10/50	5

CANDLE C37 - E14



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



VALUE

VOLT 220-240V 50/60Hz | BASE E14 | NOT DIMMABLE | BEAM ANGLE 260° | ON-OFF 15.000 | LIFETIME 15.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77200	5207227112171	G	C37	5W	45W	6500K	380	37x99mm	0.018 kg	1/20/100	20
E.180-77201	5207227115967	G	C37	5W	45W	4000K	380	37x99mm	0.018 kg	1/20/100	20
E.180-77202	5207227115998	G	C37	5W	45W	3000K	380	37x99mm	0.018 kg	1/20/100	20
E.180-77203	5207227116025	G	C37	5W	45W	2700K	380	37x99mm	0.018 kg	1/20/100	20
E.180-77210	5207227112201	F	C37	8W	70W	6500K	690	38x108mm	0.021 kg	1/20/100	20
E.180-77211	5207227116056	F	C37	8W	70W	4000K	690	38x108mm	0.021 kg	1/20/100	20
E.180-77212	5207227116087	F	C37	8W	70W	3000K	690	38x108mm	0.021 kg	1/20/100	20
E.180-77214	5207227112232	F	C37	8W	70W	2700K	930	38x108mm	0.021 kg	1/20/100	20

- BOMBILLAS LED SMD
- LED SMD LAMPS

GLOBE G45 - E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





PLUS

VOLT 220-240V 50/60Hz | BASE E14 | NOT DIMMABLE | BEAM ANGLE 300° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77310	5207227113529	G	G45	5W	45W	6500K	400	45x83mm	0.028 kg	1/10/50	10
E.147-77311	5207227113826	G	G45	5W	45W	4000K	400	45x83mm	0.028 kg	1/10/50	10
E.147-77313	5207227113550	G	G45	5W	45W	2700K	400	45x83mm	0.028 kg	1/10/50	10
E.147-77330	5207227113642	F	G45	7W	60W	6500K	630	45x83mm	0.028 kg	1/10/50	10
E.147-77331	5207227113673	F	G45	7W	60W	4000K	630	45x83mm	0.028 kg	1/10/50	10
E.147-77333	5207227113703	F	G45	7W	60W	2700K	630	45x83mm	0.028 kg	1/10/50	10

G45 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



PLUS


VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 300° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77314	5207227113581	G	G45	5W	45W	6500K	400	45x83mm	0.030 kg	1/10/50	10
E.147-77315	5207227113857	G	G45	5W	45W	4000K	400	45x83mm	0.030 kg	1/10/50	10
E.147-77317	5207227113611	G	G45	5W	45W	2700K	400	45x83mm	0.030 kg	1/10/50	10
E.147-77334	5207227113734	F	G45	7W	60W	6500K	630	45x83mm	0.030 kg	1/10/50	10
E.147-77335	5207227113765	F	G45	7W	60W	4000K	630	45x83mm	0.030 kg	1/10/50	10
E.147-77337	5207227113796	F	G45	7W	60W	2700K	630	45x83mm	0.030 kg	1/10/50	10

- BOMBILLAS LED SMD
- LED SMD LAMPS

GLOBE G45 - E14





PLUS


MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	300°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	3 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77350	5207227072796	F	G45	10W	75W	6500K	1000	45x89mm	0.060 kg	1/10/50	10
E.147-77351	5207227072802	F	G45	10W	75W	4000K	1000	45x89mm	0.060 kg	1/10/50	10
E.147-77353	5207227072819	F	G45	10W	75W	2700K	1000	45x89mm	0.060 kg	1/10/50	10

G45 - E27





PLUS


MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	300°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	3 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77354	5207227072826	F	G45	10W	75W	6500K	1000	45x84mm	0.066 kg	1/10/50	10
E.147-77355	5207227072833	F	G45	10W	75W	4000K	1000	45x84mm	0.066 kg	1/10/50	10
E.147-77357	5207227072840	F	G45	10W	75W	2700K	1000	45x84mm	0.066 kg	1/10/50	10

G45 - E14 - E27





VALUE

MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**

VOLT		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	NOT DIMMABLE	260°	15.000	15.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	BASE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77310	5207227112263	F	G45	E14	8W	70W	6500K	690	46.8x88.2mm	0.023 kg	1/20/100	20
E.180-77311	5207227151972	F	G45	E14	8W	70W	4000K	690	46.8x88.2mm	0.023 kg	1/20/100	20
E.180-77312	5207227152009	F	G45	E14	8W	70W	3000K	690	46.8x88.2mm	0.023 kg	1/20/100	20
E.180-77313	5207227112294	F	G45	E14	8W	70W	2700K	690	46.8x88.2mm	0.023 kg	1/20/100	20

CODE	BARCODE	ENERGY CLASS	TYPE	BASE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77315	5207227112324	F	G45	E27	8W	70W	6500K	690	45x83mm	0.023 kg	1/20/100	20
E.180-77316	5207227152030	F	G45	E27	8W	70W	4000K	690	45x83mm	0.023 kg	1/20/100	20
E.180-77317	5207227152061	F	G45	E27	8W	70W	3000K	690	45x83mm	0.023 kg	1/20/100	20
E.180-77318	5207227117565	F	G45	E27	8W	70W	2700K	690	45x83mm	0.023 kg	1/20/100	20


- BOMBILLAS LED SMD
- LED SMD LAMPS

GLOBE G95 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**








VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 270° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77400	5207227113888	F	G95	12W	**80W**	6500K	1200	95x142mm	0.111 kg	1/5/20	5
E.147-77401	5207227116995	F	G95	12W	**80W**	4000K	1200	95x142mm	0.111 kg	1/5/20	5
E.147-77402	5207227113918	F	G95	12W	**80W**	2700K	1200	95x142mm	0.111 kg	1/5/20	5

GLOBE G120 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 270° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77406	5207227113949	G	G120	18W	**100W**	6500K	1500	120x156mm	0.191 kg	1/5/20	5
E.147-77407	5207227064357	G	G120	18W	**100W**	4000K	1500	120x156mm	0.191 kg	1/5/20	5
E.147-77408	5207227113970	G	G120	18W	**100W**	2700K	1500	120x156mm	0.191 kg	1/5/20	5
E.147-77412	5207227115752	F	G120	25W	**155W**	6500K	2400	120x160mm	0.236 kg	1/5/20	5
E.147-77413	5207227064388	F	G120	25W	**155W**	4000K	2400	120x160mm	0.236 kg	1/5/20	5
E.147-77414	5207227115783	F	G120	25W	**155W**	2700K	2400	120x160mm	0.236 kg	1/5/20	5

• BOMBILLAS LED SMD
• LED SMD LAMPS

R50 - E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT 220-240V 50/60Hz | BASE E14 | NOT DIMMABLE | BEAM ANGLE 120° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77450	5207227114007	G	R50	8W	64W	6500K	640	50x86mm	0.043 kg	1/10/30	10
E.147-77451	5207227072857	G	R50	8W	64W	4000K	640	50x86mm	0.043 kg	1/10/30	10
E.147-77452	5207227114038	G	R50	8W	64W	2700K	640	50x86mm	0.043 kg	1/10/30	10

R63 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 120° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77453	5207227114069	G	R63	10W	120W	6500K	800	63x101mm	0.063 kg	1/10/30	10
E.147-77454	5207227072864	G	R63	10W	120W	4000K	800	63x101mm	0.063 kg	1/10/30	10
E.147-77455	5207227114090	G	R63	10W	120W	2700K	800	63x101mm	0.063 kg	1/10/30	10

R80 - E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 120° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77456	5207227060694	F	R80	12W	150W	6500K	1100	80x120mm	0.100 kg	1/10/30	10
E.147-77457	5207227064098	F	R80	12W	150W	4000K	1100	80x120mm	0.100 kg	1/10/30	10
E.147-77458	5207227060724	F	R80	12W	150W	2700K	1100	80x120mm	0.100 kg	1/10/30	10

- BOMBILLAS LED TIPO DICROICA
- LED LAMPS TYPE DICHROIC, SPECIAL FOR SHALLOW INSTALLATIONS

MODULO LED COB, ESPECIAL PARA INSTALACIONES DE POCA PROFUNDIDAD

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**







PLUS

VOLT 220-240V 50/60Hz | INCLUDED DRIVER | NOT DIMMABLE | BEAM ANGLE 120° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
9030-3	8434067170369	G	MR16	5W	50W	3000K	375	Ø50x25mm	0.090 kg	1/100	1
9030-4	8434067164238	G	MR16	5W	50W	4000K	395	Ø50x25mm	0.090 kg	1/100	1
9030-6	8434067170383	G	MR16	5W	50W	6000K	420	Ø50x25mm	0.090 kg	1/100	1

MODULO LED COB SHARP

MATERIAL DE PRODUCCION: **ALUMINIO Y VIDRIO**
PRODUCTION MATERIAL: **ALUMINIUM AND GLASS**





PRO

VOLT 220-240V 50/60Hz | INCLUDED DRIVER | NOT DIMMABLE | BEAM ANGLE 60° | ON-OFF 25.000 | LIFETIME 35,000 hr | CRI >82 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
9003-3	8434067170055	G	MR16	7W	50W	3000K	405	Ø50x55mm	0.130 kg	1/100	1
9003-5	8434067170086	G	MR16	7W	50W	5000K	440	Ø50x55mm	0.130 kg	1/100	1
9005-3	8434067170062	G	MR16	9W	55W	3000K	520	Ø50x55mm	0.130 kg	1/100	1
9005-5	8434067170093	G	MR16	9W	55W	5000K	565	Ø50x55mm	0.130 kg	1/100	1

GU11 - 120°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



PLUS




VOLT 220-240V 50/60Hz | BASE GU10 | NOT DIMMABLE | BEAM ANGLE 120° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77803	5207227106408	G	GU11	3W	25W	6500K	190	35x46mm	0.021 kg	1/10/100	10
E.147-77805	5207227106439	G	GU11	3W	25W	2700K	190	35x46mm	0.021 kg	1/10/100	10

• BOMBILLAS LED SMD
• LED SMD LAMPS
MR11 / GU4 - 35°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT 12V AC/DC 50/60Hz | BASE GU4 | NOT DIMMABLE | BEAM ANGLE 35° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77800	5207227106347	G	MR11	3W	25W	6500K	220	35x35mm	0.040 kg	1/10/100	10
E.147-77802	5207227106378	G	MR11	3W	25W	2700K	220	35x35mm	0.040 kg	1/10/100	10

MR16 / GU5.3 - 105°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT 12V AC/DC 50/60Hz | BASE GU5.3 | NOT DIMMABLE | BEAM ANGLE 105° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77853	5207227114120	G	MR16	6W	55W	6500K	480	50x48mm	0.037 kg	1/10/100	10
E.147-77854	5207227117268	G	MR16	6W	55W	4000K	480	50x48mm	0.037 kg	1/10/100	10
E.147-77855	5207227114151	G	MR16	6W	55W	2700K	480	50x48mm	0.037 kg	1/10/100	10

MR16 / GU5.3 - 38°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT 12V AC/DC 50/60Hz | BASE GU5.3 | NOT DIMMABLE | BEAM ANGLE 38° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77850	5207227117237	F	MR16	6W	55W	6500K	480	50x48mm	0.037 kg	1/10/100	10
E.147-77851	5207227117244	F	MR16	6W	55W	4000K	480	50x48mm	0.037 kg	1/10/100	10
E.147-77852	5207227117251	F	MR16	6W	55W	2700K	480	50x48mm	0.037 kg	1/10/100	10

- BOMBILLAS LED SMD
- LED SMD LAMPS

GU10 - 38° / 120° / PRO SERIES

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**







VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-265V 50/60Hz	GU10	NOT DIMMABLE	38°	25.000	30,000 hr	>80	0.5 Sec	+45°C -30°C	5 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77830	5207227175053	D	GU10	3.8W	**80W**	6500K	500	50x56mm	0.040 kg	1/10/100	10
E.147-77831	5207227175060	D	GU10	3.8W	**80W**	4000K	500	50x56mm	0.040 kg	1/10/100	10
E.147-77832	5207227175077	D	GU10	3.8W	**80W**	3000K	500	50x56mm	0.040 kg	1/10/100	10

BEAM ANGLE 120°

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77835	5207227175084	D	GU10	3.8W	**80W**	6500K	500	50x56mm	0.040 kg	1/10/100	10
E.147-77836	5207227175091	D	GU10	3.8W	**80W**	4000K	500	50x56mm	0.040 kg	1/10/100	10
E.147-77837	5207227175107	D	GU10	3.8W	**80W**	3000K	500	50x56mm	0.040 kg	1/10/100	10

PRO SERIES




• BOMBILLAS LED SMD
• LED SMD LAMPS

GU10 - 7°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI			
220-240V 50/60Hz	GU10	NOT DIMMABLE	7°	25.000	25.000 hr	>80	START TIME 0.5 Sec	OPERATING TEMPERATURE +45°C -30°C	5 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77827	5207227149535	F	GU10	6W	**85W**	4000K	525	50x56mm	0.045 kg	1/10/50	10
E.147-77828	5207227149566	F	GU10	6W	**85W**	2700K	525	50x56mm	0.045 kg	1/10/50	10




- BOMBILLAS LED SMD
- LED SMD LAMPS

GU10 - 38°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**








VOLT 220-240V 50/60Hz | BASE GU10 | NOT DIMMABLE | BEAM ANGLE 38° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77810	5207227117152	F	GU10	4W	**55W**	6500K	330	50x56mm	0.038 kg	1/10/100	10
E.147-77811	5207227117169	F	GU10	4W	**55W**	4000K	330	50x56mm	0.038 kg	1/10/100	10
E.147-77812	5207227117176	F	GU10	4W	**55W**	2700K	330	50x56mm	0.038 kg	1/10/100	10
E.147-77820	5207227114182	F	GU10	6W	**45W**	6500K	525	50x56mm	0.038 kg	1/10/100	10
E.147-77821	5207227114212	F	GU10	6W	**45W**	4000K	525	50x56mm	0.038 kg	1/10/100	10
E.147-77822	5207227114243	F	GU10	6W	**45W**	2700K	525	50x56mm	0.038 kg	1/10/100	10

GU10 - 38° - 10W

MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**





VOLT 220-240V 50/60Hz | BASE GU10 | NOT DIMMABLE | BEAM ANGLE 38° | ON-OFF 25.000 | LIFETIME 25,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 3 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77840	5207227100185	E	GU10	10W	**150W**	6500K	1000	50x56mm	0.083 kg	1/10/100	10
E.147-77841	5207227100215	E	GU10	10W	**150W**	4000K	1000	50x56mm	0.083 kg	1/10/100	10
E.147-77842	5207227100246	E	GU10	10W	**150W**	2700K	1000	50x56mm	0.083 kg	1/10/100	10

• BOMBILLAS LED SMD
• LED SMD LAMPS
GU10 - 110°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	NOT DIMMABLE	110°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77813	5207227117183	F	GU10	4W	**60W**	6500K	380	50x56mm	0.037 kg	1/10/100	10
E.147-77814	5207227117190	F	GU10	4W	**60W**	4000K	380	50x56mm	0.037 kg	1/10/100	10
E.147-77815	5207227117206	F	GU10	4W	**60W**	2700K	380	50x56mm	0.037 kg	1/10/100	10
E.147-77823	5207227114274	F	GU10	6W	**85W**	6500K	530	50x56mm	0.037 kg	1/10/100	10
E.147-77824	5207227114304	F	GU10	6W	**85W**	4000K	530	50x56mm	0.037 kg	1/10/100	10
E.147-77825	5207227114335	F	GU10	6W	**85W**	2700K	530	50x56mm	0.037 kg	1/10/100	10

GU10 - 110° - 10W

MATERIAL DE PRODUCCION: **PLÁSTICO CON CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**



PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	NOT DIMMABLE	110°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	3 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77843	5207227100277	F	GU10	10W	**150W**	6500K	1000	50x56mm	0.064 kg	1/10/100	10
E.147-77844	5207227100307	F	GU10	10W	**150W**	4000K	1000	50x56mm	0.064 kg	1/10/100	10
E.147-77845	5207227100338	F	GU10	10W	**150W**	2700K	1000	50x56mm	0.064 kg	1/10/100	10

- BOMBILLAS LED SMD
- LED SMD LAMPS


GU10 - 38° / COLOR

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**










VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	NOT DIMMABLE	38°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	TYPE	WATT	=WATT	COLOR	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77816	5207227117213	GU10	4W	**50W**	RED	50x56mm	0.037 kg	1/10/100	5
E.147-77817	5207227114366	GU10	4W	**50W**	GREEN	50x56mm	0.037 kg	1/10/100	5
E.147-77818	5207227114397	GU10	4W	**50W**	BLUE	50x56mm	0.037 kg	1/10/100	5
E.147-84218	5206139008381	GU10	4W	**50W**	YELLOW	50x56mm	0.037 kg	1/10/100	5

GU10 - 38° / DIMMABLE

MATERIAL DE PRODUCCION: **CRISTAL**
PRODUCTION MATERIAL: **GLASS**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	DIMMABLE	38°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77864	5207227175121	G	GU10	5.5W	**60W**	6500K	380	51x55mm	0.060 kg	1/10/100	5
E.147-77865	5207227144219	G	GU10	5.5W	**60W**	4000K	380	51x55mm	0.060 kg	1/10/100	5
E.147-77866	5207227144240	G	GU10	5.5W	**60W**	3000K	380	51x55mm	0.060 kg	1/10/100	5
E.147-77867	5207227144271	G	GU10	5.5W	**60W**	2700K	380	51x55mm	0.060 kg	1/10/100	5

• BOMBILLAS LED SMD
• LED SMD LAMPS

GU10 - 38° / DIMMABLE

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	DIMMABLE	38°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77874	5207227072024	E	GU10	6.5W	**100W**	6500K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77875	5207227072055	E	GU10	6.5W	**100W**	4000K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77876	5207227072086	E	GU10	6.5W	**100W**	3000K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77877	5207227072116	E	GU10	6.5W	**100W**	2700K	630	50x56mm	0.037 kg	1/10/100	5

GU10 - 120° / DIMMABLE

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	DIMMABLE	120°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77870	5207227076695	F	GU10	6.5W	**100W**	6500K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77871	5207227076725	F	GU10	6.5W	**100W**	4000K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77872	5207227076756	F	GU10	6.5W	**100W**	3000K	630	50x56mm	0.037 kg	1/10/100	5
E.147-77873	5207227076787	F	GU10	6.5W	**100W**	2700K	630	50x56mm	0.037 kg	1/10/100	5


- BOMBILLAS LED SMD
- LED SMD LAMPS

GU10 - 38°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**








VOLT 220-240V 50/60Hz | BASE GU10 | NOT DIMMABLE | BEAM ANGLE 38° | ON-OFF 15.000 | LIFETIME 15,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77810	5207227116117	F	GU10	5W	**70W**	6500K	450	49x54mm	0.026 kg	1/10/100	10
E.180-77811	5207227116148	F	GU10	5W	**70W**	4000K	450	49x54mm	0.026 kg	1/10/100	10
E.180-77812	5207227116179	F	GU10	5W	**70W**	3000K	450	49x54mm	0.026 kg	1/10/100	10
E.180-77820	5207227107467	F	GU10	7W	**90W**	6500K	560	50x54mm	0.029 kg	1/10/100	10
E.180-77821	5207227107498	F	GU10	7W	**90W**	4000K	560	50x54mm	0.029 kg	1/10/100	10
E.180-77822	5207227107528	F	GU10	7W	**90W**	3000K	560	50x54mm	0.029 kg	1/10/100	10

GU10 - 105°

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT 220-240V 50/60Hz | BASE GU10 | NOT DIMMABLE | BEAM ANGLE 105° | ON-OFF 15.000 | LIFETIME 15,000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77814	5207227116209	F	GU10	5W	**70W**	6500K	450	49x54mm	0.038 kg	1/10/100	10
E.180-77815	5207227116230	F	GU10	5W	**70W**	4000K	450	49x54mm	0.038 kg	1/10/100	10
E.180-77816	5207227116261	F	GU10	5W	**70W**	3000K	450	49x54mm	0.038 kg	1/10/100	10
E.180-77824	5207227112355	G	GU10	7W	**90W**	6500K	560	50x55mm	0.038 kg	1/10/100	10
E.180-77825	5207227112386	G	GU10	7W	**90W**	4000K	560	50x55mm	0.038 kg	1/10/100	10
E.180-77826	5207227112416	G	GU10	7W	**90W**	3000K	560	50x55mm	0.038 kg	1/10/100	10




- BOMBILLAS COG LED
- LED COG LAMPS

R7S

MATERIAL DE PRODUCCION: **CRISTAL CON BASE CERÁMICA**
PRODUCTION MATERIAL: **GLASS WITH CERAMIC BASE**








VOLT 220-240V 50/60Hz | BASE R7S | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77693	5207227064111	F	R7s	6W	70W	4000K	630	16x78mm	0.018 kg	1/10/200	5
E.147-77694	5207227064128	F	R7s	6W	70W	3000K	630	16x78mm	0.0181 kg	1/10/200	5
E.147-77698	5207227064135	F	R7s	12W	100W	4000K	1260	16x118mm	0.024 kg	1/10/200	5
E.147-77699	5207227064142	F	R7s	12W	100W	3000K	1260	16x118mm	0.024 kg	1/10/200	5

G4

MATERIAL DE PRODUCCION: **CRISTAL**
PRODUCTION MATERIAL: **GLASS**





VOLT 12V AC/DC 50/60Hz | BASE G4 | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84616	E.147-77607*	5207227106477	E	G4	2W	30W	4000K	240	12.5x50mm	0.007 kg	1/10/50/200	10
E.147-84615	E.147-77608*	5207227106514	E	G4	2W	30W	3000K	240	12.5x50mm	0.007 kg	1/10/50/200	10

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• BOMBILLAS COG LED
• LED COG LAMPS
12V AC/DC - G4

MATERIAL DE PRODUCCION: **PCB Y SILICONA**
PRODUCTION MATERIAL: **PCB & SILICONE**



PLUS

VOLT 12V AC/DC 50/60Hz | BASE G4 | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77600	5207227072888	F	G4	2W	**28W**	6500K	220	10x41.5mm	0.005 kg	1/10/50/200	10
E.147-77601	5207227072895	F	G4	2W	**28W**	4000K	220	10x41.5mm	0.005 kg	1/10/50/200	10
E.147-77602	5207227072901	F	G4	2W	**28W**	2700K	220	10x41.5mm	0.005 kg	1/10/50/200	10
E.147-77603	5207227036835	F	G4	3W	**40W**	6500K	300	12x41.5mm	0.005 kg	1/10/50/200	10
E.147-77604	5207227036842	F	G4	3W	**40W**	4000K	300	12x41.5mm	0.005 kg	1/10/50/200	10
E.147-77605	5207227064654	F	G4	3W	**40W**	2700K	300	12x41.5mm	0.005 kg	1/10/50/200	10

G4

MATERIAL DE PRODUCCION: **PCB Y SILICONA**
PRODUCTION MATERIAL: **PCB & SILICONE**



PLUS

VOLT 12V AC/DC 50/60Hz | BASE G4 | NOT DIMMABLE | BEAM ANGLE 360° | ON-OFF 25.000 | LIFETIME 25.000 hr | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84610	5207227022203	F	G4	2W	**25W**	6500K	630	10x37mm	0.005 kg	1/10/200	10
E.147-84611	5207227022241	F	G4	2W	**25W**	2700K	630	10x37mm	0.005 kg	1/10/200	10

- BOMBILLAS COG LED
- LED COG LAMPS

G9

MATERIAL DE PRODUCCION: **CRISTAL**
PRODUCTION MATERIAL: **GLASS**



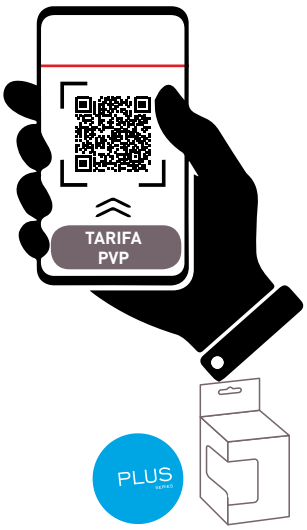


VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	G9	NOT DIMMABLE	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77640	5207227117060	E	G9	2W	**25W**	6500K	250	13.3x50mm	0.011 kg	1/10/50/200	10
E.147-77641	5207227117077	E	G9	2W	**25W**	4000K	250	13.3x50mm	0.011 kg	1/10/50/200	10
E.147-77642	5207227117084	E	G9	2W	**25W**	3000K	250	13.3x50mm	0.011 kg	1/10/50/200	10
E.147-77645	5207227117091	E	G9	4W	**45W**	6500K	450	13.3x60mm	0.011 kg	1/10/50/200	10
E.147-77646	5207227117107	E	G9	4W	**45W**	4000K	450	13.3x60mm	0.011 kg	1/10/50/200	10
E.147-77647	5207227117114	E	G9	4W	**45W**	3000K	450	13.3x60mm	0.011 kg	1/10/50/200	10

- BOMBILLAS **G9** SMD LED
- LED SMD LAMPS **G9**

MATERIAL DE PRODUCCION: **CRISTAL**
PRODUCTION MATERIAL: **GLASS**






VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	G9	NOT DIMMABLE	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77624	5207227106552	F	G9	4W	**40W**	6500K	400	16x45mm	0.011 kg	1/10/50/200	10
E.147-77625	5207227073878	F	G9	4W	**40W**	4000K	400	16x45mm	0.011 kg	1/10/50/200	10
E.147-77626	5207227106590	F	G9	4W	**40W**	2700K	400	16x45mm	0.011 kg	1/10/50/200	10
E.147-77627	5207227106637	F	G9	6W	**50W**	6500K	580	16x62mm	0.011 kg	1/10/50/200	10
E.147-77628	5207227076800	F	G9	6W	**50W**	4000K	580	16x62mm	0.011 kg	1/10/50/200	10
E.147-77629	5207227106675	F	G9	6W	**50W**	2700K	580	16x62mm	0.011 kg	1/10/50/200	10
E.147-77630	5207227072949	F	G9	12W	**85W**	6500K	1200	23x64mm	0.011 kg	1/10/50/200	10
E.147-77631	5207227072956	F	G9	12W	**85W**	4000K	1200	23x64mm	0.011 kg	1/10/50/200	10
E.147-77632	5207227072963	F	G9	12W	**85W**	2700K	1200	23x64mm	0.011 kg	1/10/50/200	10

• BOMBILLAS SMD LED
• LED SMD LAMPS
G9 / DIMMABLE

MATERIAL DE PRODUCCION: **CERÁMICA Y PLÁSTICO**
PRODUCTION MATERIAL: **CERAMIC & PLASTIC**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
220-240V 50/60Hz	G9	DIMMABLE	360°	25.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84667	E.147-77650*	5207227106712	F	G9	4W	50W	6500K	400	18x54mm	0.010 kg	1/10/50/200	10
E.147-84668	E.147-77651*	5207227106750	F	G9	4W	50W	4000K	400	18x54mm	0.010 kg	1/10/50/200	10
E.147-84669	E.147-77652*	5207227106798	F	G9	4W	50W	3000K	400	18x54mm	0.010 kg	1/10/50/200	10

G9 / BLISTER

MATERIAL DE PRODUCCION: **CERÁMICA Y PLÁSTICO**
PRODUCTION MATERIAL: **CERAMIC & PLASTIC**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
220-240V 50/60Hz	G9	NOT DIMMABLE	360°	25.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
800-84654	5207227029233	F	G9	6W	70W	4000K	580	16x62mm	0.028 kg	1/10/100	10
800-84655	5207227029264	F	G9	6W	70W	2700K	580	16x62mm	0.028 kg	1/10/100	10

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

- BOMBILLAS COG LED
- LED COG LAMPS

G9 / DIMMABLE


MATERIAL DE PRODUCCION: **CERÁMICA Y PLÁSTICO**
PRODUCTION MATERIAL: **CERAMIC & PLASTIC**





3 DIMMABLE


3 STEPS DIMMABLE
REGULACIÓN EN 3 PASOS



VOLT	BASE	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	G9	360°	25.000	25,000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT=WATT		KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84677	E.147-77653*	5207227117121	F	G9	4W	40W	6500K	350	16x50mm	0.014 kg	1/10/50/200	10
E.147-84678	E.147-77654*	5207227117138	F	G9	4W	40W	4000K	350	16x50mm	0.014 kg	1/10/50/200	10
E.147-84679	E.147-77655*	5207227117145	F	G9	4W	40W	3000K	350	16x50mm	0.014 kg	1/10/50/200	10

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

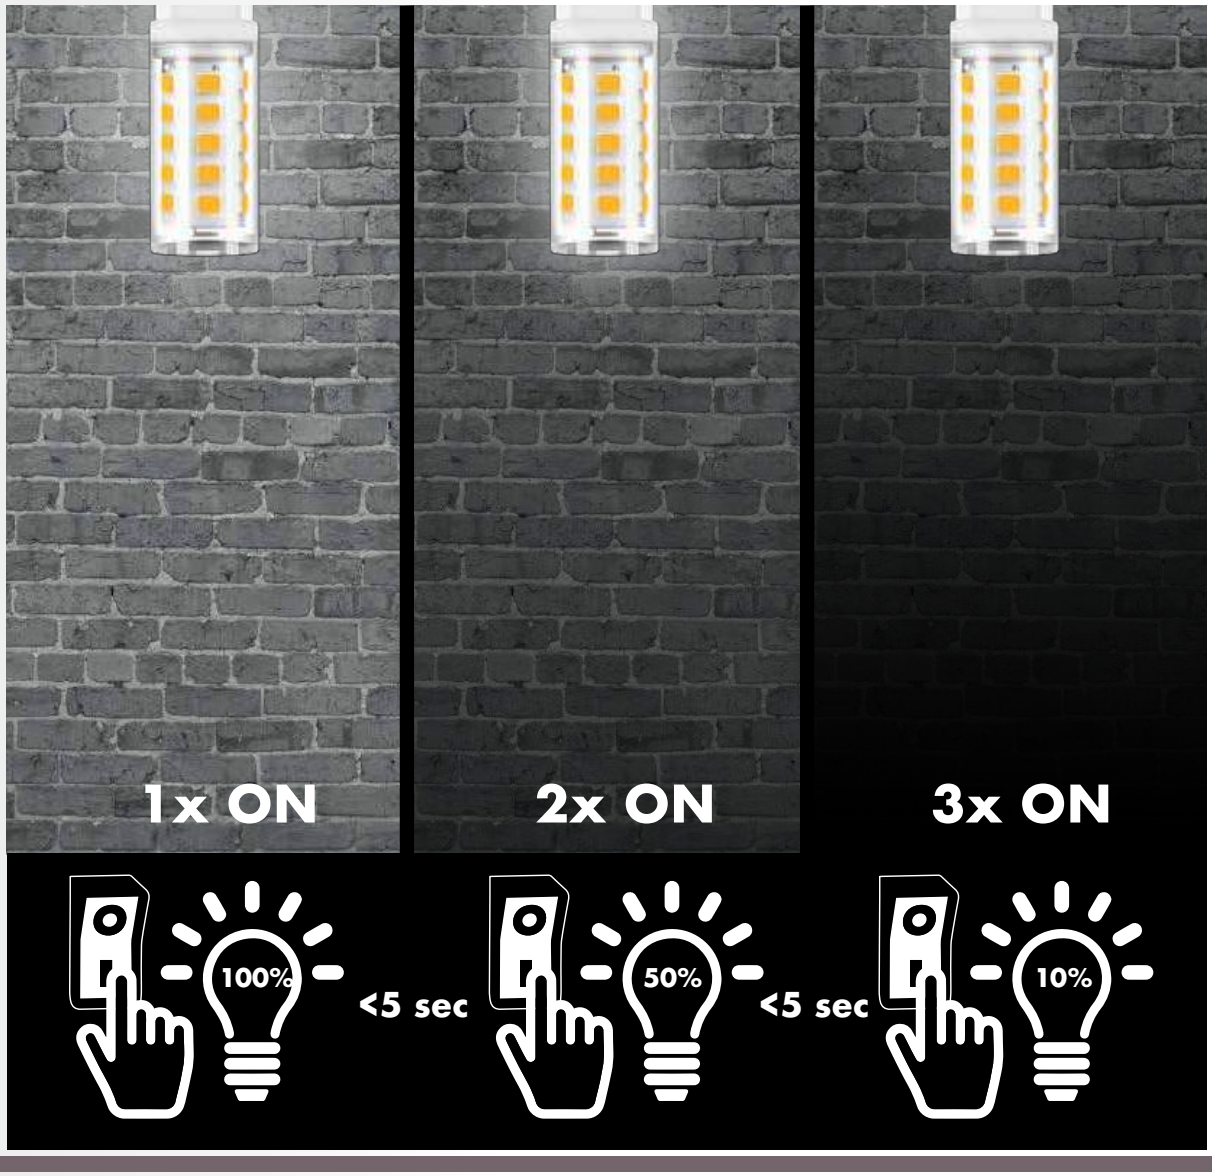

• BOMBILLAS LED FRIGORIFICO
• REFRIGERATOR LED LAMP
T23 / E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	150°	25.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-82800	5206139076656	G	T23	1W	10W	2700K	70	23x50mm	0.012 kg	1/10/200	10

T16 / E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	330°	25.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-82801	5207227037337	F	T16	3W	130W	2700K	260	16x52mm	0.023 kg	1/10/200	10

• BOMBILLAS LED NOCHE / NIGHT LED LAMPS
T22 / E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**






VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
220-240V 50/60Hz	E14	NOT DIMMABLE	150°	25.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-82820	5207227014918	F	T22	1.5W	10W	2700K	70	23x50mm	0.012 kg	1/20/200	20
E.147-82822	5207227015007	-	T22	1.5W	10W	RED	-	23x50mm	0.012 kg	1/20/200	20
E.147-82823	5207227015090	-	T22	1.5W	10W	YELLOW	-	23x50mm	0.012 kg	1/20/200	20



SMD
COMMON T TYPE LAMPS

LED

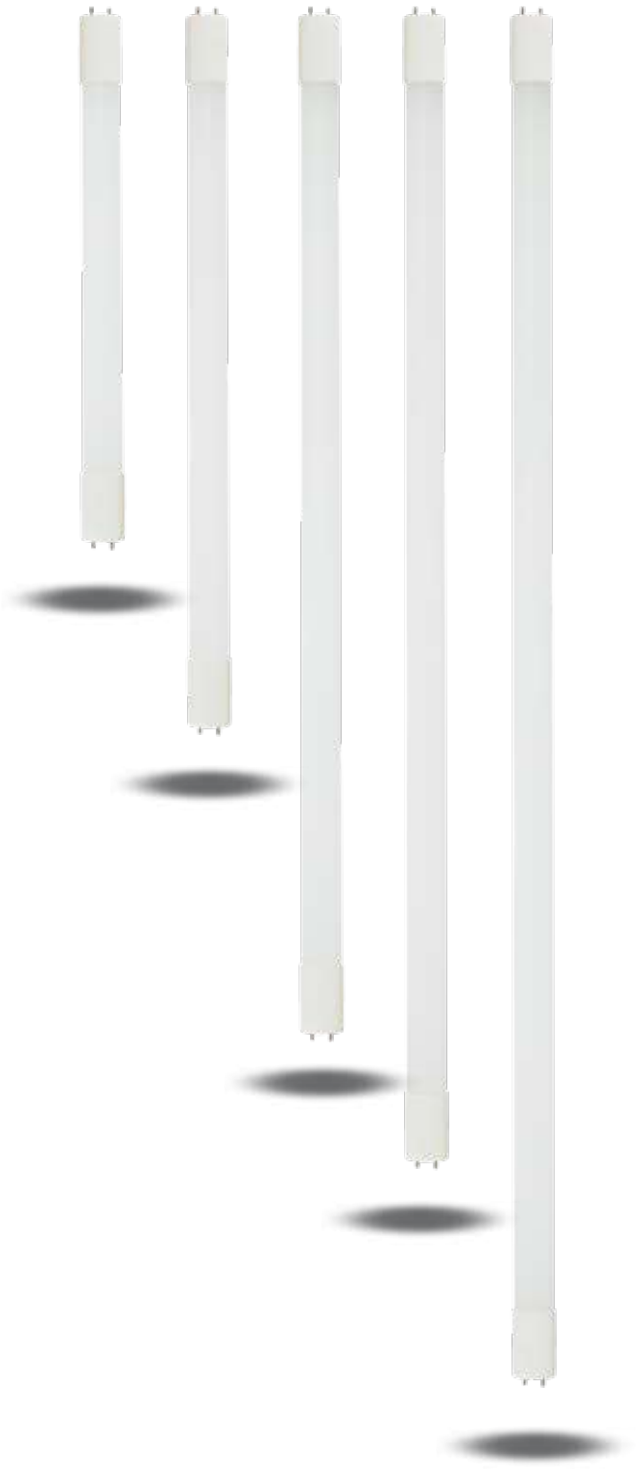

- TUBOS SMD LED
- LED SMD LAMPS

T8 / G13 / 2 IN 1 / PRO SERIES

MATERIAL DE PRODUCCION: **PLÁSTICO CON BASE CERÁMICA**
PRODUCTION MATERIAL: **PLASTIC WITH CERAMIC BASE**





PRO



VOLT	BASE	NOT DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-265V 50/60Hz	G13		220°	200.000	100.000 hr	>80	0.5 Sec	+45°C -30°C	5 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77720	5207227170607	C	T8	9W	6500K	1440	28x604mm	0.120 kg	1/10	10
E.147-77721	5207227170621	C	T8	9W	4000K	1440	28x604mm	0.120 kg	1/10	10
E.147-77722	5207227170645	C	T8	9W	3000K	1440	28x604mm	0.120 kg	1/10	10
E.147-77723	5207227170669	C	T8	18W	6500K	2880	28x1213.6mm	0.240 kg	1/10	10
E.147-77724	5207227170683	C	T8	18W	4000K	2880	28x1213.6mm	0.240 kg	1/10	10
E.147-77725	5207227170706	C	T8	18W	3000K	2880	28x1213.6mm	0.240 kg	1/10	10
E.147-77726	5207227170720	C	T8	24W	6500K	3840	28x1514.2mm	0.300 kg	1/10	10
E.147-77727	5207227170744	C	T8	24W	4000K	3840	28x1514.2mm	0.300 kg	1/10	10
E.147-77728	5207227170768	C	T8	24W	3000K	3840	28x1514.2mm	0.300 kg	1/10	10

* Para funcionamiento continuo de menos de 18 horas al día / For continuous function under 18 hours per day


PRO SERIES




• TUBOS SMD LED
• LED SMD LAMPS

T8 / G13 / 2 IN 1 / PLUS SERIES

MATERIAL DE PRODUCCION: **CRISTAL CON BASE DE PLÁSTICO**
PRODUCTION MATERIAL: **GLASS & PLASTIC BASE**

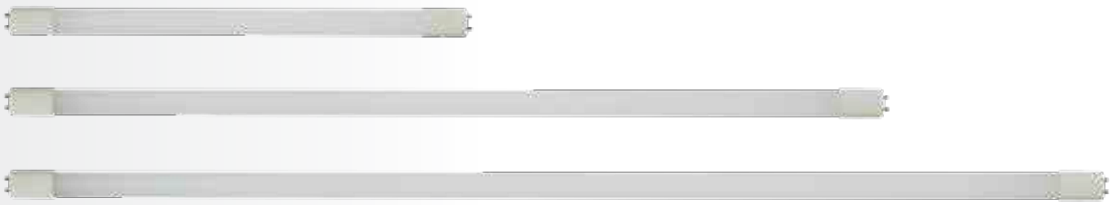




VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
90-265V 50/60Hz	G13	NOT DIMMABLE	300°	40.000	40.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84710	5207227059384	F	T8	10W	6500K	1050	28x604mm	0.120 kg	1/10	10
E.147-84711	5207227059407	F	T8	10W	4000K	1050	28x604mm	0.120 kg	1/10	10
E.147-84712	5207227059421	F	T8	10W	3000K	1050	28x604mm	0.120 kg	1/10	10
E.147-84713	5207227059445	F	T8	18W	6500K	1900	28x1213.6mm	0.240 kg	1/10	10
E.147-84714	5207227059469	F	T8	18W	4000K	1900	28x1213.6mm	0.240 kg	1/10	10
E.147-84715	5207227059483	F	T8	18W	3000K	1900	28x1213.6mm	0.240 kg	1/10	10
E.147-84716	5207227059506	F	T8	24W	6500K	2520	28x1514.2mm	0.300 kg	1/10	10
E.147-84717	5207227059520	F	T8	24W	4000K	2520	28x1514.2mm	0.300 kg	1/10	10
E.147-84718	5207227059544	F	T8	24W	3000K	2520	28x1514.2mm	0.300 kg	1/10	10

• ARRANCADOR LED PARA TUBOS LED T8
• LED STARTER FOR T8 LED TUBES





VOLT	IP	OPERATING TEMPERATURE	
90-265V 50/60Hz	20	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	WEIGHT	PACKING	MOQ	P.V.P.
E.147-02210	5207227033957	0.005 kg	25/500	25	**0,60 €**


- TUBOS SMD LED
- LED SMD LAMPS

T8 / G13 / 2 IN 1 / VALUE SERIES

MATERIAL DE PRODUCCION: **CRISTAL CON BASE DE PLÁSTICO**
PRODUCTION MATERIAL: **GLASS & PLASTIC BASE**



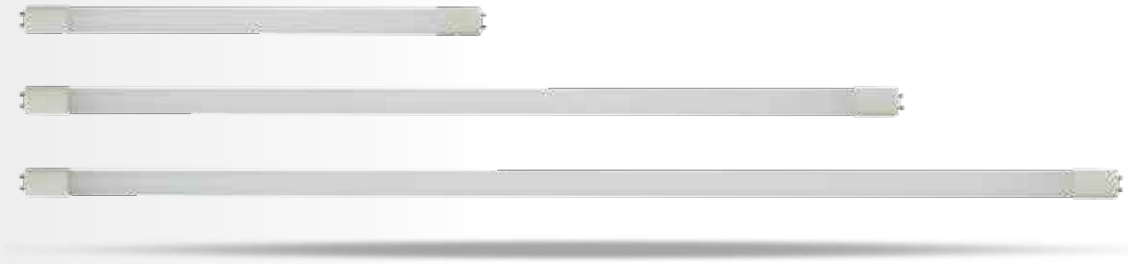




VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-250V 50/60Hz	G13	NOT DIMMABLE	300°	25.000	25,000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77740	5207227064418	F	T8	5W	6500K	525	28x450mm	0.085 kg	1/10	10
E.180-77743	5207227088698	F	T8	10W	6500K	1050	28x600mm	0.105 kg	1/10	10
E.180-77744	5207227088711	F	T8	10W	4000K	1050	28x600mm	0.105 kg	1/10	10
E.180-77746	5207227088735	F	T8	14W	6500K	1470	28x900mm	0.150 kg	1/10	10
E.180-77747	5207227088759	F	T8	14W	4000K	1470	28x900mm	0.150 kg	1/10	10
E.180-77750	5207227064449	F	T8	15W	4000K	1575	28x1000mm	0.164 kg	1/10	10
E.180-77752	5207227088773	F	T8	18W	6500K	1900	28x1200mm	0.205 kg	1/10	10
E.180-77753	5207227102165	F	T8	18W	4000K	1900	28x1200mm	0.205 kg	1/10	10
E.180-77755	5207227088797	F	T8	24W	6500K	2520	28x1500mm	0.241 kg	1/10	10
E.180-77756	5207227102172	F	T8	24W	4000K	2520	28x1500mm	0.241 kg	1/10	10

- ARRANCADOR LED PARA TUBOS LED T8
- LED STARTER FOR T8 LED TUBES





VOLT	IP	OPERATING TEMPERATURE	
90-265V 50/60Hz	20	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	WEIGHT	PACKING	MOQ
E.147-02210	5207227033957	0.005 kg	25/500	25

CABLEADO E INSTALACIÓN

PARA CONEXIÓN DIRECTA A RED CON PORTALÁMPARAS G13

Asegúrese de que el extremo marcado L & N (línea negra) esté conectado al extremo de la luminaria donde se proporciona el voltaje de funcionamiento y no al revés, según el dibujo 1. La conexión incorrecta puede causar daños a la lámpara y al dispositivo e invalida la garantía.

DIBUJO 1

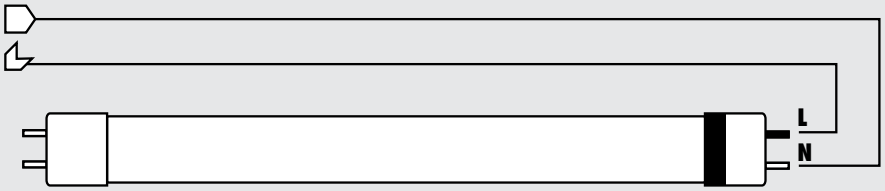

PARA CONEXIÓN A TRAVES DE REACTANCIA MAGNÉTICA CON PORTALÁMPARAS G13

Para reemplazar lámparas fluorescentes no es necesario cambiar el balasto magnético antiguo. Para la instalación, siga la conectividad del dibujo 2. Para reemplazar las lámparas fluorescentes, conecte un arrancador LED (se vende por separado) e instale la lámpara. Al instalar, asegúrese de desconectar la fuente de alimentación.

DIBUJO 2




| Solo funciona con balastro magnético. En el caso de un balasto electrónico, entonces se debe quitar y se debe seguir el dibujo 1.
| No es necesario volver a cablear.
| Instale directamente la lámpara.

WIRING AND INSTALLATION

FOR LED LIGHTING WITH G13 BASE HOLDER

Just make sure that the end marked L & N (black line) is connected to the end of the luminaire where the operating voltage is provided and not vice versa, according to drawing 1. Incorrect connection may cause damage to the lamp and the fixture and invalidates the warranty.


DRAWING 1

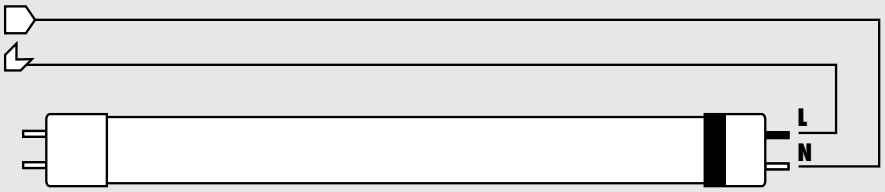

FOR FLUORESCENT LIGHTING WITH G13 BASE HOLDER

For fluorescent lamps it is not necessary to change the old magnetic ballast. For installation, follow the connectivity from drawing 2. To replace fluorescent lamps, connect a LED starter (sold separately) and install the lamp. When installing, be sure to disconnect the power supply.

DRAWING 2

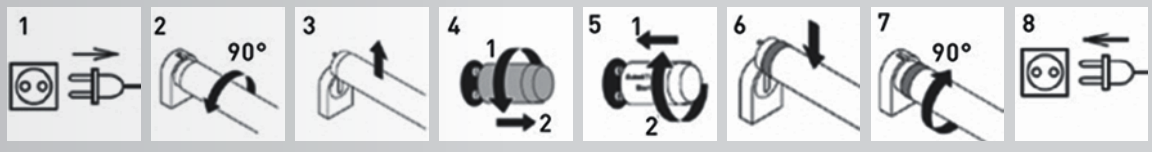

| It only works with magnetic ballast. In the case of an electronic ballast, then it should be removed and drawing 1 should be followed.
| No need for re-wiring.
| Directly install the lamp on.

- TUBOS SMD LED
- LED SMD LAMPS


T8 / G13 / 2 LADOS-2 ENDS / VALUE SERIES


MATERIAL DE PRODUCCION: **CRISTAL CON BASE DE PLÁSTICO**
PRODUCTION MATERIAL: **GLASS & PLASTIC BASE**



- **Alimentación por 2 lados**
- **2 Ends Power**

L+N

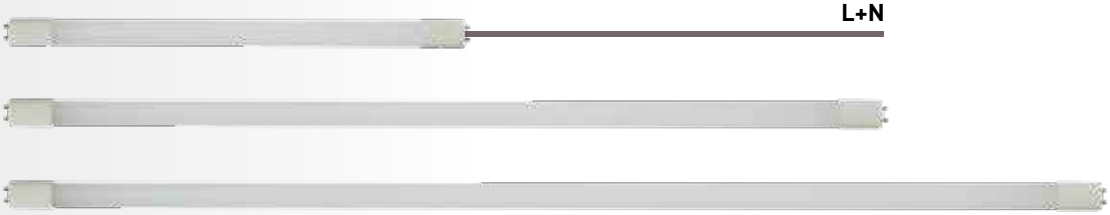




VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
175-265V 50/60Hz	G13	NOT DIMMABLE	300°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.180-77720	5207227146923	F	T8	10W	6500K	1050	28x604mm	0.107 kg	1/10	10
E.180-77721	5207227146947	F	T8	10W	4000K	1050	28x604mm	0.107 kg	1/10	10
E.180-77723	5207227146961	F	T8	18W	6500K	1900	28x1200mm	0.205 kg	1/10	10
E.180-77724	5207227146985	F	T8	18W	4000K	1900	28x1200mm	0.205 kg	1/10	10
E.180-77726	5207227147005	F	T8	18W	6500K	1900	28x1200mm	0.241 kg	1/10	10
E.180-77727	5207227147029	F	T8	18W	4000K	1900	28x1200mm	0.241 kg	1/10	10


AC175-265V 50/60 Hz

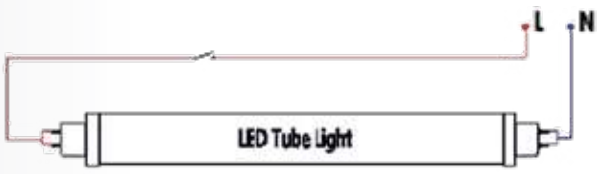

- TUBOS SMD LED
- LED SMD LAMPS

T5 / G5

MATERIAL DE PRODUCCION: **CRISTAL Y PLÁSTICO**
PRODUCTION MATERIAL: **GLASS & PLASTIC**

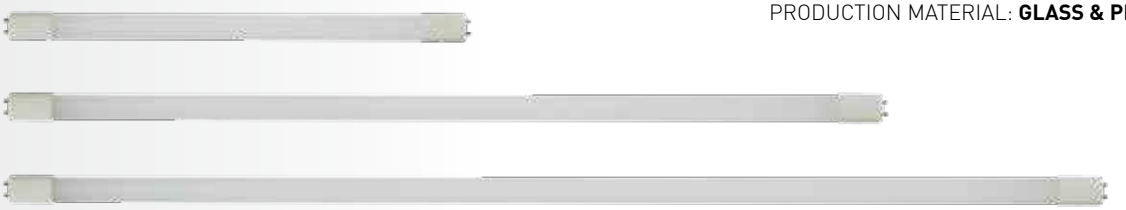

PRO

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
175-265V 50/60Hz	G5	NOT DIMMABLE	220°	40.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77701	5207227105814	F	T5	9W	4000K	900	18.5x600mm	0.071 kg	1/25/50	10
E.147-77704	5207227105845	F	T5	14W	4000K	1400	18.5x900mm	0.105 kg	1/25/50	10
E.147-77707	5207227105876	F	T5	18W	4000K	1800	18.5x1200mm	0.140 kg	1/25/50	10
E.147-77710	5206139077097	F	T5	22W	4000K	2200	20x1500mm	0.185 kg	1/25/50	10

T9 / G10Q

MATERIAL DE PRODUCCION: **CRISTAL Y PLÁSTICO**
PRODUCTION MATERIAL: **GLASS & PLASTIC**



PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
175-265V 50/60Hz	G10Q	NOT DIMMABLE	270°	50.000	25.000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77791	5207227082719	F	T9	20W	4000K	1800	30x300mm	0.160 kg	1/10	10
E.147-77794	5207227082733	F	T9	32W	4000K	2600	30x400mm	0.215 kg	1/10	10



SMD
PAR30-38-56
AR111
LAMPS

LED



- BOMBILLAS SMD LED
- LED SMD LAMPS

AR111 / ES111 • GU10

MATERIAL DE PRODUCCION: **ALUMINIO + PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM + PLASTIC WITH ALUMINIUM HEATSINK**







VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10	NOT DIMMABLE	24°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	COLOR	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77684	5207227072994	WHITE	F	AR111	12W	**145W**	4000K	1200	111x71mm	0	1/10/50	5

12V AC/DC • AR111 - G53

MATERIAL DE PRODUCCION: **ALUMINIO + PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM + PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
12V AC/DC 50/60Hz	G53	NOT DIMMABLE	24°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	COLOR	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77681	5207227072987	WHITE	F	AR111	12W	**145W**	4000K	1050	111x71mm	0	1/10/50	5

• BOMBILLAS COB LED
• LED COB LAMPS
AR111

MATERIAL DE PRODUCCION: **ALUMINIO + PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM + PLASTIC WITH ALUMINIUM HEATSINK**



PRO

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	G53	NOT DIMMABLE	40°	25.000	35.000 hr	>82	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	BASE	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
9054-3	8434067000659	F	G53	AR111	15W	**170W**	3000K	1125	Ø111x67mm	0.150 kg	1/50	1
9054-4	8434067004008	F	G53	AR111	15W	**170W**	4000K	1190	Ø111x67mm	0.150 kg	1/50	1
9054-5	8434067000666	F	G53	AR111	15W	**170W**	5000K	1275	Ø111x67mm	0.150 kg	1/50	1

• BOMBILLAS SMD LED
• LED SMD LAMPS
PAR30 / E27 / DIMMABLE

MATERIAL DE PRODUCCION: **ALUMINIO + PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM + PLASTIC WITH ALUMINIUM HEATSINK**



PRO

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	40°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	BASE	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77551	5207227074585	F	E27	PAR30	15W	**170W**	4000K	1300	95x92mm	0.150 kg	1/10/50	5
E.147-77552	5207227074615	F	E27	PAR30	15W	**170W**	2700K	1300	95x92mm	0.150 kg	1/10/50	5

- BOMBILLAS SMD LED
- LED SMD LAMPS

PAR38 - E27

MATERIAL DE PRODUCCION: **CRISTAL CON BASE DE PLÁSTICO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**





PRO

VOLT	BASE		IP	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
170-240V 50/60Hz	E27	NOT DIMMABLE	65	45°	25.000	30.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77560	5207227114755	F	PAR38	15W	**180W**	6500K	1320	122x133mm	0.350 kg	1/12	5
E.147-77561	5207227114779	F	PAR38	15W	**180W**	4000K	1320	122x133mm	0.350 kg	1/12	5
E.147-77562	5207227114793	F	PAR38	15W	**180W**	3000K	1320	122x133mm	0.350 kg	1/12	5
E.147-77563	5207227114816	-	PAR38	15W	-	GREEN	-	122x133mm	0.350 kg	1/12	5
E.147-77564	5207227114830	-	PAR38	15W	-	BLUE	-	122x133mm	0.350 kg	1/12	5

42V AC/DC • PAR38 - E27



PRO

VOLT	BASE		IP	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
42V AC/DC 50/60Hz	E27	NOT DIMMABLE	65	45°	25.000	30.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77566	5207227114854	F	PAR38	15W	**180W**	6500K	1320	122x133mm	0.350 kg	1/12	5
E.147-77568	5207227114878	-	PAR38	15W	-	GREEN	-	122x133mm	0.350 kg	1/12	5

• BOMBILLAS SMD LED PAR56 PISCINA
• LED SMD LAMPS FOR POOL LIGHTS
PAR56

MATERIAL DE PRODUCCION: **CRISTAL CON BASE DE ALUMINIO**
PRODUCTION MATERIAL: **GLASS WITH ALUMINIUM BASE**

Se combina con la luminaria de piscina empotrada
Combined with recessed pool fixture base
E.145-55906







VOLT 12V AC/DC 50/60Hz | BASE PAR56 | NOT DIMMABLE | IP 68 | BEAM ANGLE 90° | ON-OFF 15.000 | LIFETIME 30.000 hr | CRI >80 | START TIME 0.1 Sec | OPERATING TEMPERATURE +50°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77570	5207227153501	F	PAR56	20W	**250W**	6500K	1900	178x114mm	0.780 kg	1/12	2
E.147-77571	5207227153525	G	PAR56	20W	**250W**	3000K	1700	178x114mm	0.780 kg	1/12	2
E.147-77572	5207227174940	-	PAR56	20W	-	BLUE	-	178x114mm	0.780 kg	1/12	2
E.147-77573	5207227174957	-	PAR56	20W	-	RGB	-	178x114mm	0.780 kg	1/12	2

• CONTROLADOR E INTERRUPTOR PARA PAR 56
• CONTROLLER AND SWITCH FOR PAR 56







VOLT 220-240V 50/60Hz | IP 20 | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

OLD CODE	NEW CODE	BARCODE	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84575	**E.147-77575***	5207227153976	120W	75x45x30mm	0.105 kg	1/50	2

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

La gama de productos inteligentes de EUROLAMP Smart incluye lámparas Wi-Fi, adaptadores de corriente, enchufes, controles remotos infrarrojos "inteligentes" y nuevos artículos que se agregan continuamente.

La aplicación EUROLAMP Smart es fácil de usar y es totalmente compatible con todos los dispositivos EUROLAMP Smart WiFi, así como con todos los dispositivos con indicación "Powered by TUYA". El usuario puede administrar todos los dispositivos "inteligentes" con una sola aplicación, sin restricciones.

Para utilizar los Smart Items, la aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.

The range of smart home appliances from **EUROLAMP Smart** includes Wi-Fi Lamps, power adaptors, sockets, "smart" infrared remote controls, and new items are added continuously.

The EUROLAMP Smart app is easy to use and is fully compatible with all EUROLAMP Smart WiFi devices, as well as all devices with "Powered by TUYA" indication. The user can manage all the "smart" devices with one application, without restrictions.

For using the Smart Items, the EUROLAMP SMART WI-FI application must be installed to your device.

EUROLAMP SMART WI-FI APPLICATION

EUROLAMP Smart



DOWNLOAD & INSTALL

ANDROID APP ON Google play

Available on the iPhone App Store

SCAN

Requiere Android 4.4 o superior, e iOS 9.0 o superior.
Requires Android 4.4 or higher, & iOS 9.0 or higher.

WORKS WITH amazon alexa

works with the Google Assistant

Powered by tuya Intelligence Inside

EUROLAMP® Smart WiFi LED



• LÁMPARAS SMART WI-FI
• SMART WI-FI LAMPS



A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**




• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.
• The EUROLAMP SMART WI-FI APP, must be installed to your device.

• Se regula a través de la aplicación
• Dimmable through app

EUROLAMP Smart

PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27		260°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77901	5207227076817	F	A60	9W	60W	RGBW	850	60x110mm	0.064 kg	1/10/50	5

C37 / E14

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**




• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.
• The EUROLAMP SMART WI-FI APP, must be installed to your device.

• Se regula a través de la aplicación
• Dimmable through app

EUROLAMP Smart

PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E14		260°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77902	5207227076824	F	C37	6W	40W	RGBW	470	37x97mm	0.030 kg	1/10/50	5

GU10

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**




• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.
• The EUROLAMP SMART WI-FI APP, must be installed to your device.

• Se regula a través de la aplicación
• Dimmable through app

EUROLAMP Smart

PLUS



VOLT	BASE	DIMMABLE	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	GU10		260°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77903	5207227076831	G	GU10	6W	40W	RGBW	470	50x55mm	0.045 kg	1/10/100	5

• ADAPTADORES SMART WI-FI
• SMART WI-FI ADAPTORS

MATERIAL DE PRODUCCION: **PLÁSTICO**
PRODUCTION MATERIAL: **PLASTIC**





• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.

• The EUROLAMP SMART WI-FI APP, must be installed to your device.


EUROLAMP Smart

• Conectividad de red / Network Connectivity: 2,4GHz WiFi

• Protocolo / Protocol: IEEE 802.11b/g/n

• Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher


• Con medidor de energia / With Power meter



VOLT	AMPERAGE	FUNCTION INDICATOR	SHUTTER PROTECTION	GROUNDING	OPERATING TEMPERATURE	2 YEARS GUARANTEE
220-240V 50/60Hz	10 A				+45°C -10°C	

CODE	BARCODE	DESCRIPTION	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77913	5207227110207	ADAPTADOR SMART SCHUKO WIFI Y MEDIDOR DE ENERGIA SMART ADAPTOR SCHUKO WITH WIFI AND POWER METER	2300W	55x55x90mm	0.086 kg	1/20/120	2

MATERIAL DE PRODUCCION: **PLÁSTICO**
PRODUCTION MATERIAL: **PLASTIC**

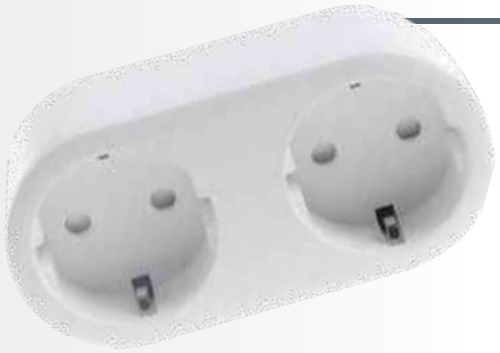

• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.

• The EUROLAMP SMART WI-FI APP, must be installed to your device.


EUROLAMP Smart

• Conectividad de red / Network Connectivity: 2,4GHz WiFi

• Protocolo / Protocol: IEEE 802.11b/g/n

• Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher

• Con medidor de energia / With Power meter



VOLT	AMPERAGE	FUNCTION INDICATOR	SHUTTER PROTECTION	GROUNDING	OPERATING TEMPERATURE	2 YEARS GUARANTEE
220-240V 50/60Hz	16 A				+45°C -10°C	

CODE	BARCODE	DESCRIPTION	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77914	5207227117275	ADAPTADOR SMART DOBLE SCHUKO WIFI SMART ADAPTOR DUAL SCHUKO WIFI	3680W	55x90x90mm	0.193 kg	1/10/60	2

- ADAPTADORES SMART WI-FI
- SMART WI-FI ADAPTORS

MATERIAL DE PRODUCCION: **100% PC**
PRODUCTION MATERIAL: **100% PC**



• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.

• The EUROLAMP SMART WI-FI APP, must be installed to your device.

• Conectividad de red / Network Connectivity: 2,4GHz WiFi

• Protocolo / Protocol: IEEE 802.11b/g/n


• Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher

• Con medidor de energia / With Power meter

EUROLAMP Smart



4USB
CHARGER
5V DC / 4.2 A



VOLT	AMPERAGE	FUNCTION INDICATOR	SHUTTER PROTECTION	CABLE CROSS SECTION	CABLE EXTENSION	GROUNDING	OPERATING TEMPERATURE	YEARS GUARANTEE
110-240V 50/60Hz	16 A			3x1.5mm²	1.8 m		+45°C -10°C	2

CODE	BARCODE	DESCRIPTION	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77915	5207227110238	3 ENCHUFES Y 4 PUERTOS USB SMART CON WIFI Y MEDIDOR SMART POWER STRIP 3 SCHUKO & 4 USB PORTS WITH WIFI & POWER METER	3680W	362x57.8x42mm	0.826 kg	1/20	2

• MULTICONTROL INFRARROJO SMART WI-FI
• SMART WI-FI UNIVERSAL IR CONTROLLER


MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.

• The EUROLAMP SMART WI-FI APP, must be installed to your device.


EUROLAMP Smart

- **Conectividad de red / Network Connectivity: 2,4GHz WiFi**
- **Protocolo / Protocol: IEEE 802.11b/g/n**
- **Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher**
- **Rango Infrarrojo / Infrared Range: 8m**
- **Frecuencia IR / Infrared Frequency: 38 KHz**
- **Cable USB (incluido) / USB cable(included): 1 m**
- **Funcion aprendizaje: si / Learning function: yes**

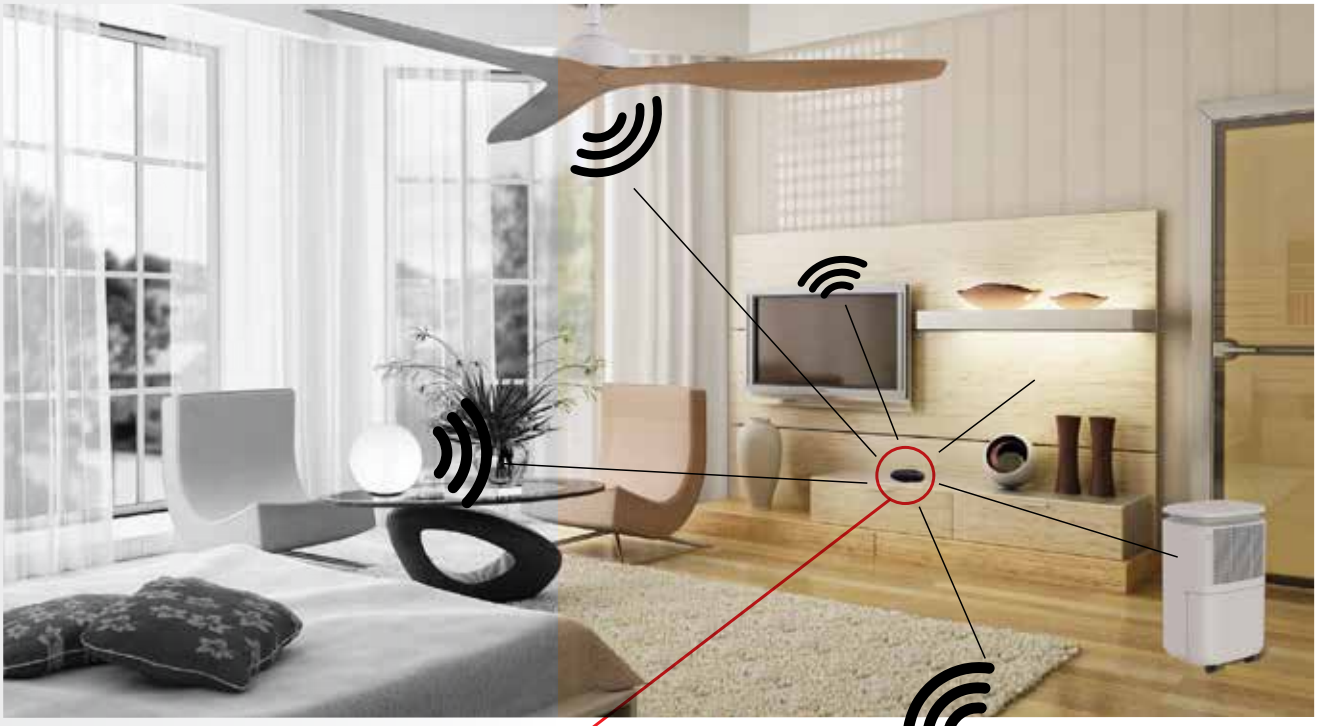







VOLT 5V DC 50/60Hz | AMPERAGE 1 A | FUNCTION INDICATOR | OPERATING TEMPERATURE +50°C 0°C | 2 YEARS GUARANTEE

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77930	5207227117282	MULTICONTROL INFRARROJO UNIVERSAL SMART WIFI SMART IR UNIVERSAL CONTROLLER WIFI	Ø65x20mm	0.065 kg	1/20/100	2

- SISTEMA DE SEGURIDAD SMART WI-FI
- SMART WI-FI SECURITY SYSTEM

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**



• La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.
• The EUROLAMP SMART WI-FI APP, must be installed to your device.

- **Conectividad de red / Network Connectivity: 2,4GHz WiFi**
- **Protocolo / Protocol: IEEE 802.11b/g/n**
- **Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher**
- **Rango WI-FI / WI-FI Range: 30m**
- **Rango de accesorios / Accessories Range: >100m**
- **Número máximo de dispositivos conectados / max connected devices: 5**
- **Número máximo de accesorios conectados / max connected accessories: 20**
- **Batería / Battery: Lithium 3.7V 650mAh**





Se puede conectar una sirena externa y un detector de humo al sistema de seguridad

At the Security System can be connected External Alarm & Smoke Sensor

El Kit incluye / the Kit includes:

- **Estación base de seguridad / Alarm base station**
- **Sensor de movimiento / Motion Sensor**
- **Timbre / Doorbell**
- **3 Sensores de contacto / 3 Contact Sensors**
- **2 Controles remotos / Remote Controls**

VOLT	AMPERAGE	BATTERY	SOUND ALARM	OPERATING TEMPERATURE	
5V DC 50/60Hz	1A	3.7V Lithium	120 dB	+50°C -20°C	2 YEARS GUARANTEE

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77940	5207227147043	SISTEMA DE SEGURIDAD SMART WiFi INALÁMBRICO SMART HOME WIRELESS SECURITY SYSTEM WiFi	80x80x35mm	0.350 kg	1/16	1

Todos los accesorios se conectan a
All the accessories connect to
EUROLAMP SMART WIFI
SECURITY SYSTEM E.147-77940

Home Value

• SISTEMA DE SEGURIDAD SMART WI-FI
• SMART WI-FI SECURITY SYSTEM

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

- **La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.**
- **The EUROLAMP SMART WI-FI APP, must be installed to your device.**

- **Conectividad de red / Network Connectivity: 2,4GHz WiFi**
- **Protocolo / Protocol: IEEE 802.11b/g/n**
- **Requisitos del sistema / System Requirements:**
  Android 4.4 or higher & iOS 9.0 or higher

EUROLAMP Smart



BATTERY 2x1.5VAA | IP 20 | OPERATING TEMPERATURE +50°C -20°C | 2 YEARS GUARANTEE

- **RF433**
- **Distancia de detección / Detection Distance: 5m**

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77941	5207227147050	DETECTOR DE MOVIMIENTO INALÁMBRICO WIRELESS MOTION SENSOR PIR	5.5x10x3.5mm	0.081 kg	1/10/100	1

BATTERY 12V 23A | IP 20 | OPERATING TEMPERATURE +50°C -20°C | 2 YEARS GUARANTEE

- **RF433**

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77942	5207227147067	SENSOR PUERTA/VENTANA INALÁMBRICO WIRELESS DOOR/WINDOW SENSOR	25x65x15mm	0.038 kg	1/25/250	1

BATTERY 9V 6LR61 | IP 20 | SOUND ALARM 80 dB | OPERATING TEMPERATURE +50°C -10°C | 2 YEARS GUARANTEE

- **RF433**
- **Rango de detección / Detection Range: 20m²**

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77943	5207227147074	SENSOR DE HUMO INALÁMBRICO WIRELESS SMOKE SENSOR	12x11x6mm	0.163 kg	1/10/100	1



VOLT 100-240V 50/60Hz | BATTERY Lithium7.4V 400mAh | IP 44 | SOUND ALARM 120 dB | OPERATING TEMPERATURE +50°C -10°C | 2 YEARS GUARANTEE

- **RF433**
- **Descarga de Batería / Battery Discharge: 8hr**

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77944	5207227147081	SIRENA DE ALARMA EXTERNA INALÁMBRICA WIRELESS EXTERNAL ALARM SIREN	9.3x3.85x15.21mm	0.203 kg	1/50	1

• CAMARA DE SEGURIDAD CON MOVIMIENTO 360° SMART WI-FI
• SMART WI-FI SECURITY CAMERA WITH 360° ROTATION



MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

- **La aplicación EUROLAMP SMART WI-FI debe estar instalada en su dispositivo.**
- **The EUROLAMP SMART WI-FI APP, must be installed to your device.**

- **Conectividad de red / Network Connectivity: 2,4GHz WiFi**
- **Protocolo / Protocol: IEEE 802.11b/g/n**
- **Requisitos del sistema / System Requirements: Android 4.4 or higher & iOS 9.0 or higher**




VOLT	AMPERAGE	OPERATING TEMPERATURE	
5V DC 50/60Hz	1.5A	+50°C -20°C	2 YEARS GUARANTEE

CODE	BARCODE	DESCRIPTION	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77945	5207227154010	**CÁMARA DE SEGURIDAD CON MOVIMIENTO 360° SMART WIFI SECURITY CAMERA WITH 360° ROTATION**	138x118x88mm	0.342 kg	1/50	1

- Montaje en superficie y pared / Surface & Wall Mounted
- Full High Definition
- Visión norturna / Night Vision: <10m
- Movimiento robótico 355° horizontalmente y 90° verticalmente
  Robotic Motion 355° Horizontally & 90° Vertically
- MicroSD max 128GB
- Micrófono incorporado / Built-in Microphone
- Altavoz incorporado / Built-in Speaker
- Diámetro de Lente / Lens Diameter 3.6mm - 110°
- Capacidad de almacenamiento en la nube / Cloud Storage Capacity
- Detector de movimiento y Alarma / Motion Detection & Alarm
- Grabación / Recording
- Comunicación bidireccional / 2-way communication



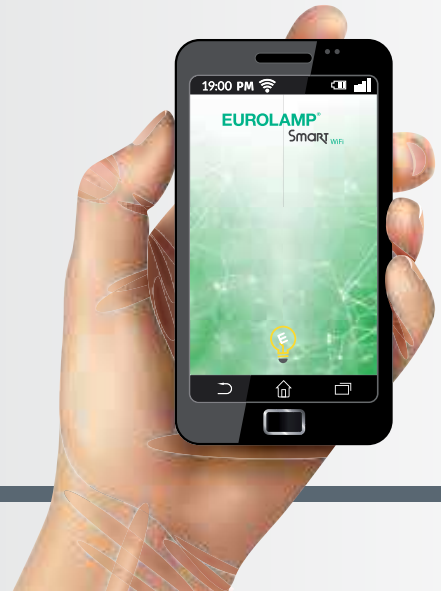

El kit incluye / the Kit includes:

- Cámara inteligente / Smart Camera
- Cargador / Charger
- Cable USB / USB Cable



SPECIAL TECHNOLOGY LAMPS

LED



- BOMBILLA LED SMD CON PANEL SOLAR INCORPORADO
- LED SMD LAMP WITH BUILT-IN SOLAR PANELS

A70 / E27



MATERIAL DE PRODUCCION: **PP Y PLÁSTICO**
PRODUCTION MATERIAL: **PP & PLASTIC**

FUNCIONES

• Cuenta con tres paneles solares. Se carga a la luz del sol durante 8-9 horas para proporcionar iluminación durante 2-3 horas.

• La lámpara solar funciona como una lámpara común, mientras se carga al mismo tiempo. Tarda de 4 a 5 horas en cargarse por completo y le brinda 5 horas de luz de la batería en caso de un corte de energía (el interruptor debe estar encendido).

APLICACIONES

• Iluminación portátil
• Iluminación de emergencia
• Iluminación de Pequeños Espacios Interiores
• Iluminación para Jardín o Porche

FUNCTIONS

• Fitted with three Solar Panels. The bulb will change in sunlight for 8-9 hours, and give 2-3 hours of lighting.


• The solar bulb operates like any common light bulb and charges at the same time. 4-5 hours are needed for full charge, and gives 5 hours of lighting with the battery, in case of power outage (the switch must be turned on)

APPLICATIONS

• Portable Lighting
• Emergency Lighting
• Small Indoor Lighting
• Garden or Porch Lighting







PLUS

VOLT	BASE		IP	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
85-265V 50/60Hz	E27	NOT DIMMABLE	65	230°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	1 YEAR GUARANTEE

CODE	BARCODE	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.145-20003	5207227033025	A70	7W	**40W**	6500K	450	70x134mm	0.130 kg	1/10/100	2

• BOMBILLA LED RGBW CON MANDO A DISTANCIA
• LED LAMP RGBW WITH REMOTE CONTROL
A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



A través de control remoto / via controller

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-77906	5207227076817	F	A60	9W	**60W**	RGBW	850	60x110mm	0.150 kg	1/10/50	5


- BOMBILLA DE FILAMENTOS LED CON SENSOR DIA/NOCHE
- LED FILAMENT LAMP WITH DAY & NIGHT SENSOR

A60 / E27


MATERIAL DE PRODUCCION: **VIDREO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**







- **Se enciende automáticamente cuando la luz de la habitación está por debajo de 20 LUX / Lights up automatically when the room light is below 20 LUX**
- **Se apaga automáticamente cuando la luz de la habitación es suficiente (más de 70 LUX) / Switches off automatically when the room light is sufficient (over 70 LUX)**



VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-78990	5207227117398	E	A60	7W	**60W**	3000K	806	60x106mm	0.050 kg	1/10/50	5

- BOMBILLA LED CON SENSOR DIA/NOCHE
- LED LAMP WITH DAY & NIGHT SENSOR


A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





- **Se enciende automáticamente cuando la luz de la habitación está por debajo de 20 LUX / Lights up automatically when the room light is below 20 LUX**
- **Se apaga automáticamente cuando la luz de la habitación es suficiente (más de 70 LUX) / Switches off automatically when the room light is sufficient (over 70 LUX)**




VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
170-265V 50/60Hz	E27	NOT DIMMABLE	180°	25.000	30.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84931	5207227059001	F	A60	10W	**70W**	4000K	900	60x108mm	0.070 kg	1/10/50	5

• BOMBILLA LED SMD CON DETECTOR MOVIMIENTO
• LED SMD LAMP WITH MOTION DETECTOR
A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



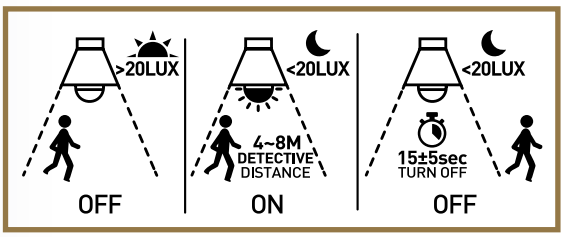

• **Se enciende automáticamente cuando el sensor detecta movimiento (alcance de 4 a 8 m) y la luz de la habitación está por debajo de 20 LUX / Lights up automatically when the sensor detects motion (4-8m range) and the room light is below 20 LUX**

• **Permanece encendido durante 15 segundos después de detectar movimiento /Remains lighten for 15 sec after detecting movement**

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	180°	25.000	30.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84936	5207227057397	F	A60	12W	**75W**	4000K	1055	60x120mm	0.060 kg	1/10/50	5

• BOMBILLA FILAMENTOS LED CON ESPEJO PLATA
• LED FILAMENT SILVER MIRROR LAMP
A60 / E27 / DIMMABLE

MATERIAL DE PRODUCCION: **VIDREO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**



• **La bombilla de espejo plata regulable ofrece luz difusa**
The dimmable mirror silver bulb offers diffused light

• **Ofrece una iluminación brillante y menos deslumbrante, al reflejar la luz hacia el espejo**
Offers bright and less glare lighting, by reflecting the light back to the fixture with its half coating

• **Es ideal para lámparas abiertas o colgantes**
It is ideal for open fixtures, pendants

PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	DIMMABLE	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	=WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-80960	5206139035677	F	A60	6W	**50W**	2700K	650	60x106mm	0.045 kg	1/10/50	5

- BOMBILLA LED REPELENTE DE INSECTOS
- LED SMD INSECT REPELLENT LAMP


A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**









PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	360°	25.000	25.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	TYPE	WATT	KELVIN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-80981	5207227011290	A60	7W	YELLOW	60x112mm	0.043 kg	1/10/50	10

- BOMBILLA LED MATA-INSECTOS
- LED INSECT KILLER LAMP

E27


MATERIAL DE PRODUC**CION: PL□STICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





UV LED
40m² Área de cobertura / Area Coverage
1000V Voltaje Mata-Insectos / Killing Voltage

Sin Mercurio / Mercury Free
Iluminación direccional / Directional Lighting



PLUS

VOLT	BASE		BEAM ANGLE	ON-OFF	LIFETIME	START TIME	OPERATING TEMPERATURE	
220-240V 50/60Hz	E27	NOT DIMMABLE	180°	25.000	40.000 hr	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-80984	5207227033124	E	5W	6500K	550	80x160mm	0.140 kg	1/40	10

• BOMBILLA LED SMD LUZ NEGRA
• LED SMD BLACKLIGHT LAMP
A60 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





PLUS

VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | BEAM ANGLE 200° | ON-OFF 25.000 | LIFETIME 25,000 hr | START TIME 0.5 Sec | OPERATING TEMPERATURE +45°C -30°C | 2 YEARS GUARANTEE

CODE	BARCODE	TYPE	WATT	KELVIN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-84940	5207227058141	A60	6W	ULTRAVIOLET	60x111mm	0.035 kg	1/10/50	5

• LUZ ESTROBOSCOPICA LED SMD XENON
• LED SMD XENON STROBE LIGHT
T58 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



- **5.000.000 Flashes**
- **60-80 minuto / minute**
- **Duración / duration 0.5mS**
- **Clear**

PLUS

VOLT 220-240V 50/60Hz | BASE E27 | NOT DIMMABLE | IP 44 | BEAM ANGLE 360° | START TIME 0.5 Sec | OPERATING TEMPERATURE +60°C -40°C | 2 YEARS GUARANTEE

CODE	BARCODE	TYPE	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-81960	5207227029127	T58	4-6W	50x100mm	0.040 kg	1/10/100	5



PROFESSIONAL
& INDUSTRIAL USE
SMD LAMPS

LED



- BOMBILLAS LED SMD
- LED SMD LAMPS

AJAX / SL / E27

MATERIAL DE PRODUCCION: **ALUMINIO Y PLÁSTICO CON CUBIERTA PRISMÁTICA Y DIFUSOR**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC WITH PRISMATIC COVER & DIFFUSER**







VOLT	BASE		IP	IK10	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
170-250V 50/60Hz	E27	NOT DIMMABLE	65		270°	50.000	40,000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76500	5207227063916	F	SL	15W	6500K	1500	65x149mm	0.143 kg	1/10/50	10
E.147-76501	5207227063947	F	SL	15W	4000K	1500	65x149mm	0.143 kg	1/10/50	10
E.147-76502	5207227063978	F	SL	15W	2700K	1500	65x149mm	0.143 kg	1/10/50	10
E.147-76506	5207227064005	F	SL	20W	6500K	2000	65x169mm	0.160 kg	1/10/50	10
E.147-76507	5207227064036	F	SL	20W	4000K	2000	65x169mm	0.160 kg	1/10/50	10
E.147-76508	5207227064067	F	SL	20W	2700K	2000	65x169mm	0.160 kg	1/10/50	10

• BOMBILLAS LED SMD
• LED SMD LAMPS
HAMMER / T80 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
100-277V 50/60Hz	E27	NOT DIMMABLE	65	IK08	180°	50.000	40.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76530	5207227104640	E	T80	16W	6500K	1760	80x136mm	0.150 kg	1/40	10
E.147-76531	5207227104664	E	T80	16W	4000K	1760	80x136mm	0.150 kg	1/40	10
E.147-76532	5207227111150	E	T80	16W	2700K	1760	80x136mm	0.150 kg	1/40	10



T80 / T100 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
100-277V 50/60Hz	E27	NOT DIMMABLE	65	IK08	180°	50.000	40.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76539	5207227111174	F	T80	30W	6500K	3000	80x150mm	0.210 kg	1/20	5
E.147-76540	5207227111198	F	T80	30W	4000K	3000	80x150mm	0.210 kg	1/20	5
E.147-76545	5207227064326	F	T100	40W	6500K	4000	100x180mm	0.380 kg	1/20	5
E.147-76546	5207227064333	F	T100	40W	4000K	4000	100x180mm	0.380 kg	1/20	5

- BOMBILLAS LED SMD
- LED SMD LAMPS


HAMMER / T118 / T135 / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





E.147-76551 & E.147-76552
E27 + E40
con adaptador
with adaptor



VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI		OPERATING TEMPERATURE	
100-277V 50/60Hz	E27	NOT DIMMABLE	65	IK08	180°	50.000	40,000 hr	>80	START TIME 0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

2kV LIGHTING PROTECTION — PRO

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76548	5207227111211	F	T118	50W	6500K	5000	118x210mm	0.510 kg	1/12	2
E.147-76549	5207227104695	F	T118	50W	4000K	5000	118x210mm	0.510 kg	1/12	2
E.147-76551	5207227104718	F	T135	100W	6500K	10000	135x277mm	0.950 kg	1/8	2
E.147-76552	5207227111235	F	T135	100W	4000K	10000	135x277mm	0.950 kg	1/8	2

• BOMBILLAS LED SMD
• LED SMD LAMPS

HAMMER / T230 / E27+E40

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



E27 + E40
con adaptador
with adaptor



VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
100-277V 50/60Hz	E27 + E40	NOT DIMMABLE	65	IK08	180°	50.000	40.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE


CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76557	5207227104732	D	T230	125W	6500K	18750	230x306mm	1.500 kg	1/4	2
E.147-76558	5207227111259	D	T230	125W	4000K	18750	230x306mm	1.500 kg	1/4	2


- BOMBILLAS LED SMD
- LED SMD LAMPS

MAGNOLIA / E27

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**



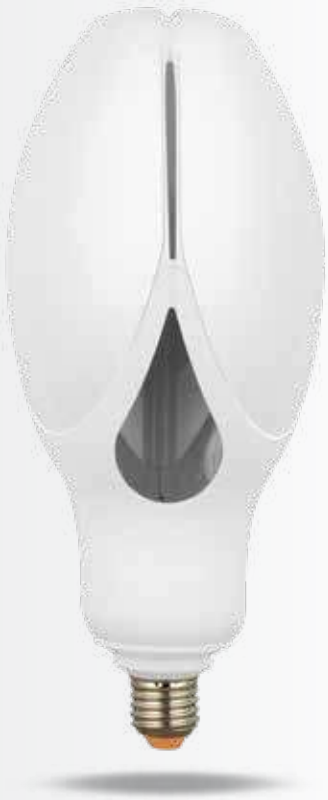



VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
180-265V 50/60Hz	E27	NOT DIMMABLE	65	IK08	360°	50.000	40.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76010	5207227063718	E	MAGNOLIA	30W	6500K	3450	90x218mm	0.230 kg	1/25	2
E.147-76011	5207227063725	E	MAGNOLIA	30W	4000K	3450	90x218mm	0.230 kg	1/25	2
E.147-76012	5207227063732	E	MAGNOLIA	30W	2700K	3450	90x218mm	0.230 kg	1/25	2
E.147-76013	5207227063749	E	MAGNOLIA	40W	6500K	2000	90x218mm	0.280 kg	1/25	2
E.147-76014	5207227063756	E	MAGNOLIA	40W	4000K	2000	90x218mm	0.280 kg	1/25	2
E.147-76015	5207227063763	E	MAGNOLIA	40W	2700K	2000	90x218mm	0.280 kg	1/25	2
E.147-76020	5207227059728	E	MAGNOLIA	50W	6500K	2000	90x218mm	0.300 kg	1/25	2
E.147-76021	5207227059742	E	MAGNOLIA	50W	4000K	2000	90x218mm	0.300 kg	1/25	2
E.147-76022	5207227063787	E	MAGNOLIA	50W	2700K	2000	90x218mm	0.300 kg	1/25	2

• BOMBILLAS LED SMD
• LED SMD LAMPS
MAGNOLIA / E40

MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**





VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
180-265V 50/60Hz	E40	NOT DIMMABLE	65	IK08	360°	50.000	40.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

NEW CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76023	5207227063800	E	MAGNOLIA	60W	6500K	6300	120x285mm	0.530 kg	1/10	2
E.147-76024	5207227060915	E	MAGNOLIA	60W	4000K	6300	120x285mm	0.530 kg	1/10	2
E.147-76025	5207227063824	E	MAGNOLIA	60W	2700K	6300	120x285mm	0.530 kg	1/10	2
E.147-76026	5207227063831	E	MAGNOLIA	70W	6500K	7350	120x285mm	0.550 kg	1/10	2
E.147-76027	5207227063848	E	MAGNOLIA	70W	4000K	7350	120x285mm	0.550 kg	1/10	2
E.147-76028	5207227063855	E	MAGNOLIA	70W	2700K	7350	120x285mm	0.550 kg	1/10	2
E.147-76030	5207227060892	E	MAGNOLIA	80W	6500K	8400	120x285mm	0.600 kg	1/10	2
E.147-76031	5207227063879	E	MAGNOLIA	80W	4000K	8400	120x285mm	0.600 kg	1/10	2
E.147-76032	5207227063893	E	MAGNOLIA	80W	2700K	8400	120x285mm	0.600 kg	1/10	2

- BOMBILLAS LED SMD
- LED SMD LAMPS

FAN / E27



MATERIAL DE PRODUCCION: **PLÁSTICO CON DISIPADOR DE ALUMINIO**
PRODUCTION MATERIAL: **PLASTIC WITH ALUMINIUM HEATSINK**

Esta lámpara LED con su diseño innovador parece un ventilador. Las alas se abren 90° y se pueden plegar y girar sobre su eje, iluminando hacia arriba, hacia abajo o en cualquier combinación de posición y ángulo.

This LED lamp with innovative design, looks like a fan. Each wing can be opened by 90° angle, folded and rotated around their axis, allowing the lighting upwards, downwards or in any combination of position and angle.

*** Esta bombilla no funciona como ventilador / This bulb does not work as a fan**

E.147-76601



80x234mm



374x85mm


E.147-76601



90x234mm



398x85mm








VOLT	BASE		IP	IK	BEAM ANGLE	ON-OFF	LIFETIME	CRI	START TIME	OPERATING TEMPERATURE	
185-265V 50/60Hz	E27	NOT DIMMABLE	20	IK08	360°	25.000	25.000 hr	>80	0.5 Sec	+45°C -30°C	2 YEARS GUARANTEE

CODE	BARCODE	ENERGY CLASS	TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
E.147-76601	5207227099687	E	FAN	40W	4000K	4600	135x277mm	0.313 kg	1/25	2
E.147-76604	5207227099700	E	FAN	52W	4000K	5980	135x277mm	0.397 kg	1/25	2

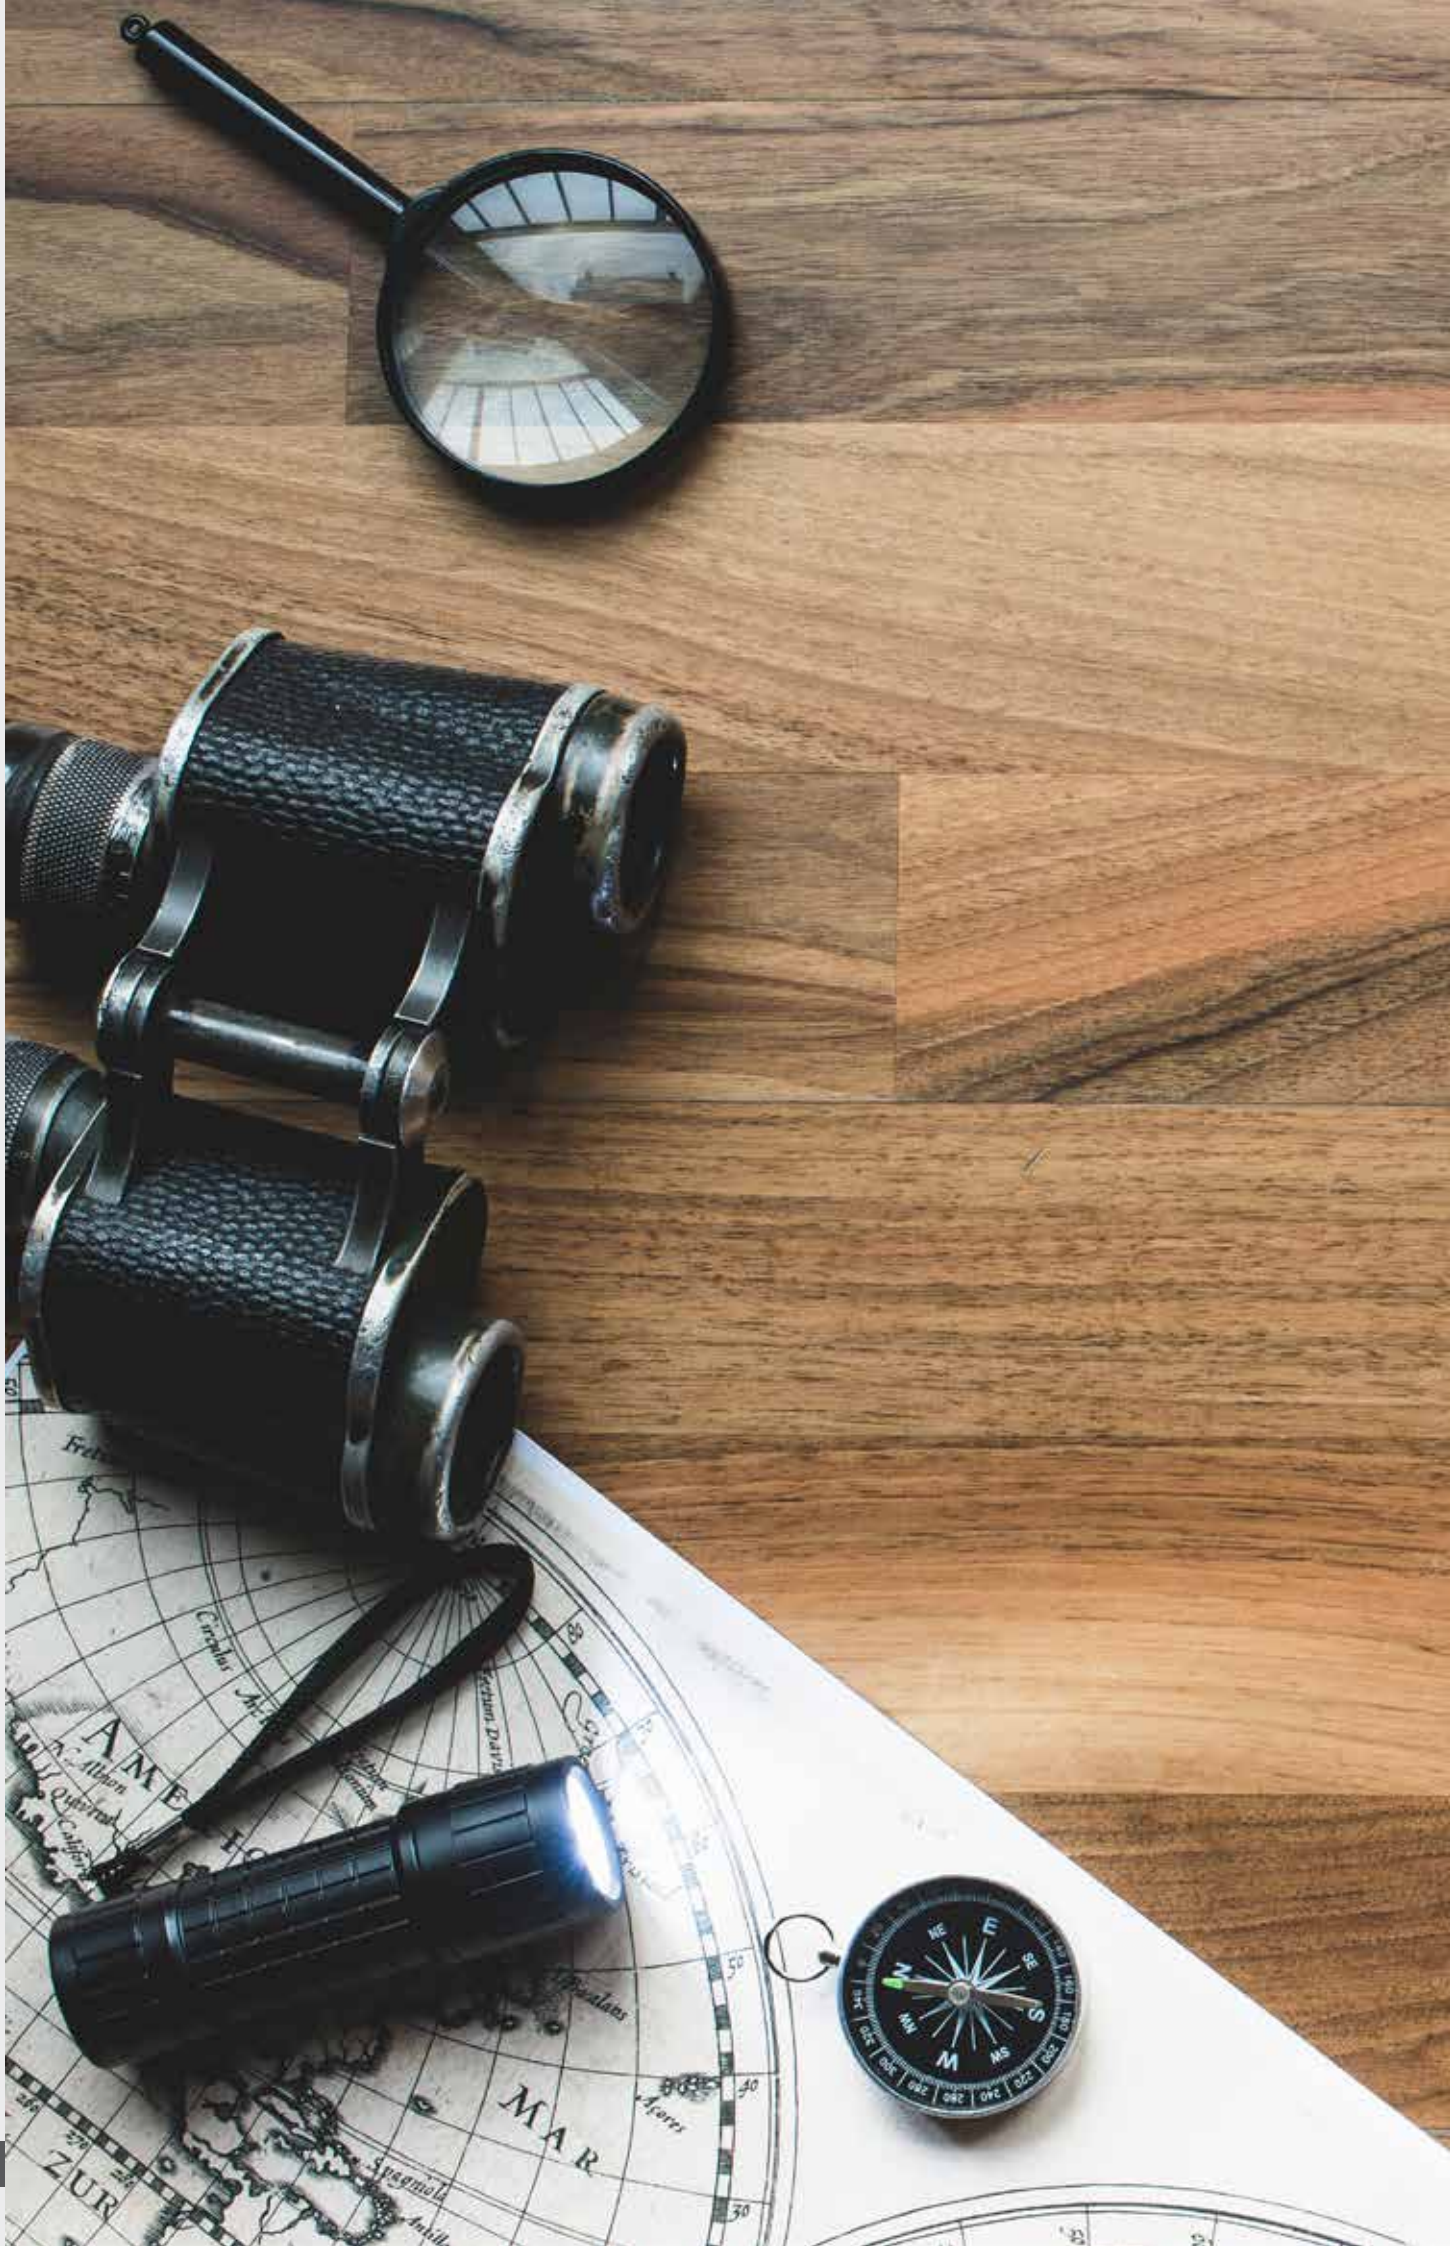


AME
MAR
ZUR

FLASH LIGHTS



- LINTERNA LED A BATERIA DE ALUMINIO
- LED BATTERY FLASH LIGHT

RESISTENTE AL AGUA / WATERPROOF

MATERIAL DE PRODUCCION: **ALUMINIO, PP Y CAUCHO**
PRODUCTION MATERIAL: **ALUMINIUM & PP & RUBBER**








24 hours
Battery Discharge

2 x AA BATTERY



VOLT 3V DC | TYPE XPE | ON-OFF BUTTON | IP 44 | OPERATING TEMPERATURE +45°C -20°C | 2 YEARS GUARANTEE

CODE	BARCODE	COLOR	LED TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24520	5207227116759	BLUE	XPE	1W	5000-6500K	150	163x45mm	0.120 kg	1/12/24	12
145-24521	5207227116766	RED	XPE	1W	5000-6500K	150	163x45mm	0.120 kg	1/12/24	12


D TYPE

MATERIAL DE PRODUCCION: **ALUMINIO, PP Y CAUCHO**
PRODUCTION MATERIAL: **ALUMINIUM & PP & RUBBER**



36 hours
Battery Discharge

2 x D BATTERY



VOLT 3V DC | TYPE XPE | ON-OFF BUTTON | IP 44 | OPERATING TEMPERATURE +45°C -20°C | 2 YEARS GUARANTEE

CODE	BARCODE	COLOR	LED TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24522	5207227116773	BLUE	XPE	3W	5000-6500K	250	200x64mm	0.250 kg	1/12/24	12

• LINTERNA DE TRABAJO LED A BATERIA
• LED BATTERY WORK LIGHT
ΜΕ ΜΑΓΝΗΤΗ / WITH MAGNET

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

Imán y gancho integrados
Build-in Magnet & Hook






18 hours
Battery Discharge

2 x AA BATTERY

3 modos de iluminación
3 Lighting Ways



VOLT	TYPE	BEAM ANGLE	ON-OFF BUTTON	IP	OPERATING TEMPERATURE	
3V DC	XPE	120°		44	+45°C -20°C	2 YEARS GUARANTEE

CODE	BARCODE	LED TYPE	LED CHIPS	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24504	5206139080240	CREE XPE	15 SMD & 1 CREE XPE	120 & 80	151x36.5x46mm	0.106 kg	1/6/24	6

• LINTERNA DE CABEZA LED A BATERIA
• LED BATTERY HEAD LIGHT


MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

Modo: Alto/Bajo/Flash Rojo/Apagado
Function: High / Low / Red Flashing / Off



7 hours
Battery Discharge

3 x AAA BATTERY



VOLT	TYPE	BEAM ANGLE	ON-OFF BUTTON	IP	OPERATING TEMPERATURE	
4.5V DC	XPE	300°		44	+45°C -20°C	2 YEARS GUARANTEE

CODE	BARCODE	LED TYPE	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24503	5206139080219	CREE XPE	150	60x48x30mm	0.065 kg	1/6/24	6

- LINTERNA LED A BATERIA
- LED BATTERY FLASH LIGHT

BOLSILLO / POCKET

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**






2 hours
Battery Discharge

2 x AAA BATTERY
Con correa para la muñeca
With wrist cord

Modo: Normal / Zoom
Function: Normal / Zoom





VOLT 3V DC | TYPE XTE CREE | ON-OFF BUTTON | IP 44 | OPERATING TEMPERATURE +45°C -20°C | 2 YEARS GUARANTEE

CODE	BARCODE	LED TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24523	5207227116780	CREE XPE	5W	5000K	200	16.5x123mm	0.030 kg	1/24/96	24

- LINTERNA LED A BATERIA EXPERT
- LED BATTERY FLASH LIGHT EXPERT

RECARGABLE, CON ZOOM, RESISTENTE AL AGUA
RECHARGABLE, WITH ZOOM, WATERPROOF

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**




2 hours
Battery Discharge

1 x 18650 BATTERY

Modo / Function
100% / 60% / 30% / Flashing / Off

Accesorios: Cable USB / Anillo de goma adicional / Correa para la muñeca
Accessories: USB cable / Extra rubber ring / Wrist cord



VOLT 5V DC | TYPE CREE XPL | ON-OFF BUTTON | IP 65 | OPERATING TEMPERATURE +45°C -20°C | 2 YEARS GUARANTEE

CODE	BARCODE	COLOR	LED TYPE	WATT	KELVIN	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24530	5207227116797	BLACK	CREE XPL V4	10W	5000-6500K	770	36x152mm	0.270 kg	1/6/24	2

- LINTERNA LED A BATERIA
- LED BATTERY FLASH LIGHT

MODO / OPERATION ZOOM

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


7 hours
Battery Discharge


3 x AAA
COB LED



Modo: Normal / Zoom
Function: Normal / Zoom

Alcance / Range: 100m
Función: Alto/Bajo/Secuencial/Zoom
Function: High / Low / Flashing / Zoom

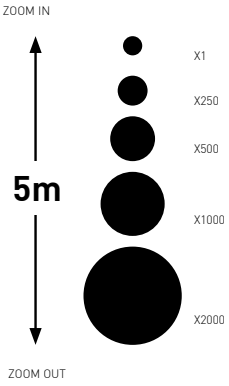



VOLT	TYPE	BEAM ANGLE		IP	OPERATING TEMPERATURE	
4.5V DC	CREE	10°-120°	ON-OFF BUTTON	44	+45°C -20°C	2 YEARS GUARANTEE

CODE	BARCODE	COLOR	LED TYPE	WATT	LUMEN	DIMENSION	WEIGHT	PACKING	MOQ
145-24507	5206139080400	BLACK	CREE	3W	150	112x34.6mm	0.090 kg	1/16/64	16

- Paneles LED
- LED Lighting Panels



EUROLAMP®
Electrical Equipment



Ideal para usar en:

- Tiendas
- Centros comerciales
- Oficinas
- Moteles
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Stores
- Shopping malls
- Business Areas
- Motels
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages


- Marco de aluminio Slim / slim aluminium frame
- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance

- PANELES LED <UGR 19
- LED LIGHTING PANELS <UGR 19

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

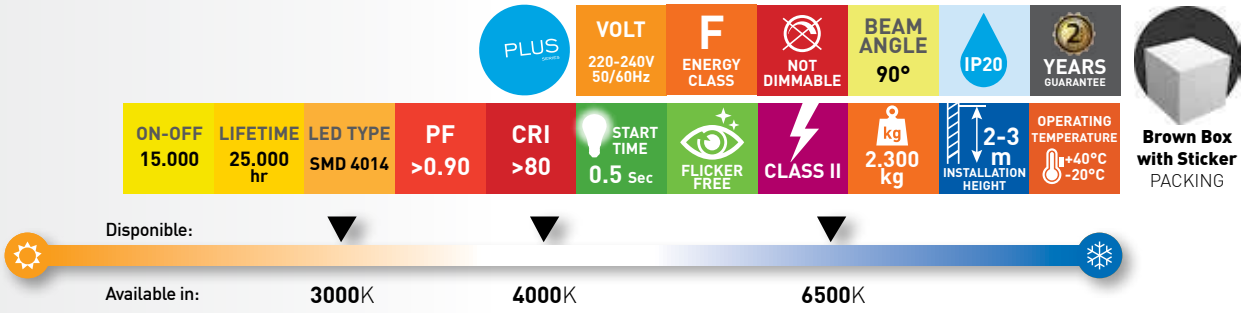



Brown Box with Sticker
PACKING

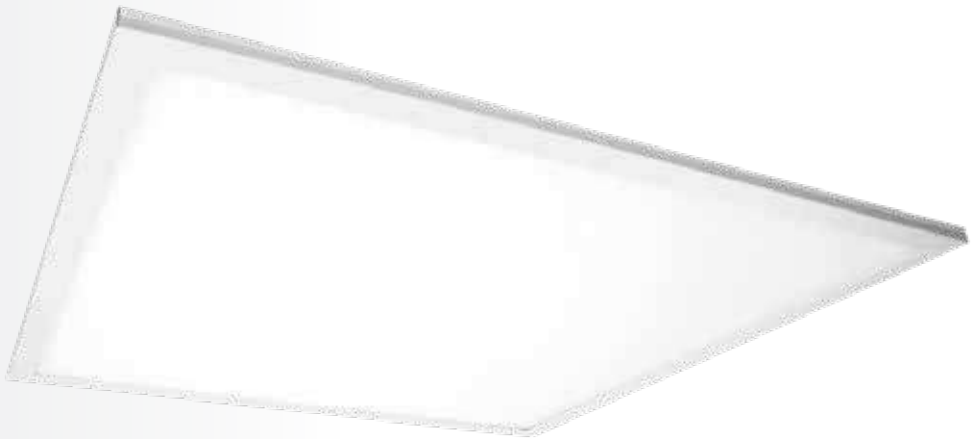

< 19 UGR

575x575mm
CUTTING DIMENSION






CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	COLOR	PACKING	MOQ
E.145-56170	5207227061691	40W	6500K	105 lm/watt	WHITE	1/5	1
E.145-56171	5207227061714	40W	4000K	105 lm/watt	WHITE	1/5	1
E.145-56172	5207227061738	40W	3000K	95 lm/watt	WHITE	1/5	1



- PANELES LED <UGR 19
- LED LIGHTING PANELS <UGR 19

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

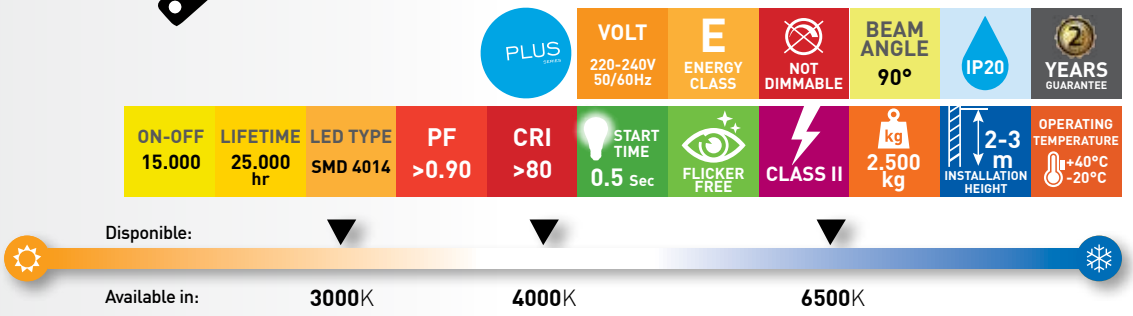





Brown Box with Sticker
PACKING



< 19 UGR

275x1175mm
CUTTING DIMENSION

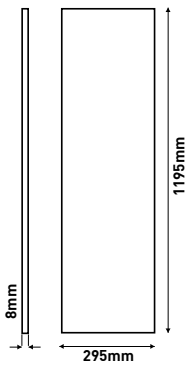





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	COLOR	PACKING	MOQ
E.145-56173	5207227070082	40W	6500K	105 lm/watt	WHITE	1/5	1
E.145-56174	5207227070105	40W	4000K	105 lm/watt	WHITE	1/5	1
E.145-56175	5207227070129	40W	3000K	95 lm/watt	WHITE	1/5	1

- PANELES LED
- LED LIGHTING PANELS


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

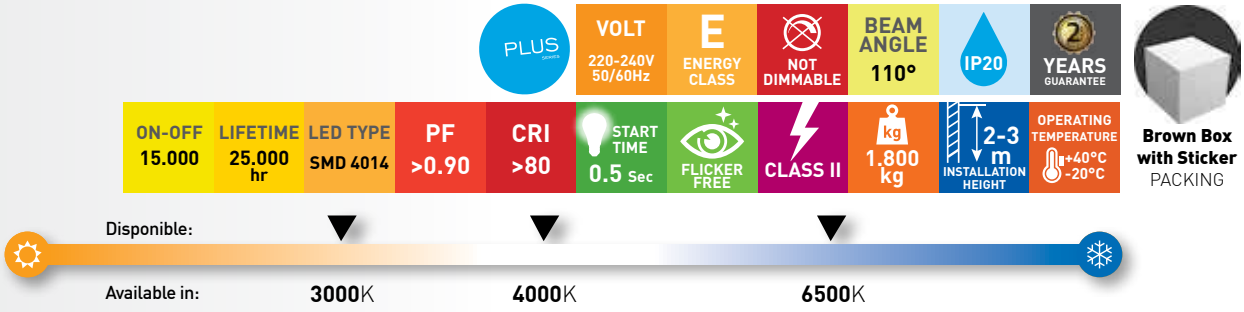


Brown Box with Sticker
PACKING

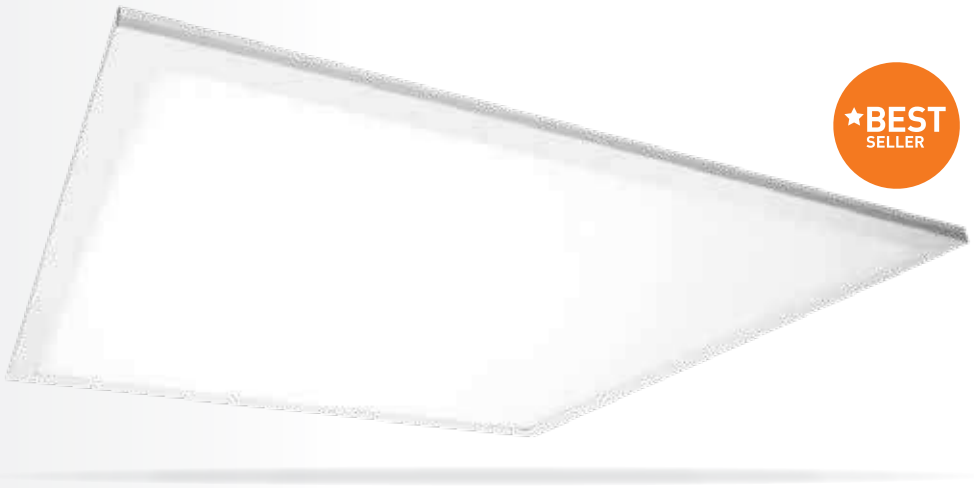

575x575mm
CUTTING DIMENSION





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	COLOR	PACKING	MOQ
E.145-56160	5207227033872	40W	6500K	115 lm/watt	WHITE	1/5	1
E.145-56161	5207227033889	40W	4000K	113 lm/watt	WHITE	1/5	1
E.145-56162	5207227033902	40W	3000K	110 lm/watt	WHITE	1/5	1



• PANELES LED
• LED LIGHTING PANELS

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


PLUS | VOLT 220-240V 50/60Hz | E ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 4014 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2.300 kg | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C




Brown Box with Sticker PACKING


Disponible:
Available in: **3000**K | **4000**K | **6500**K

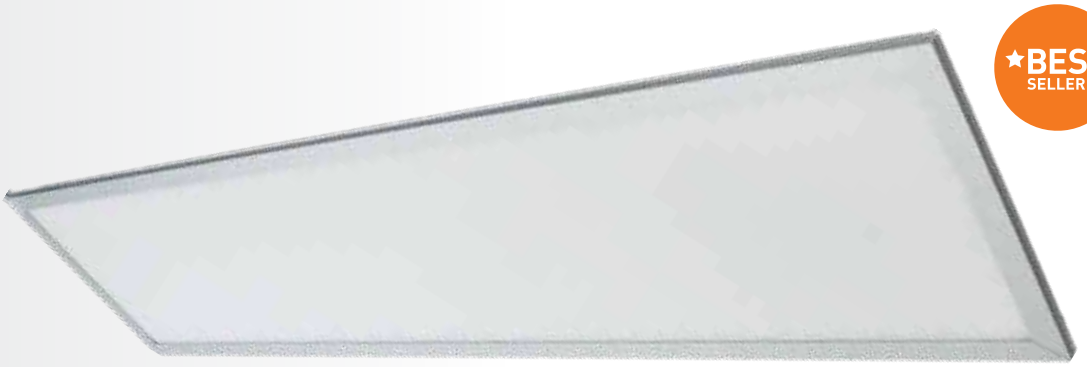

★BEST SELLER

275x1175mm
CUTTING DIMENSION

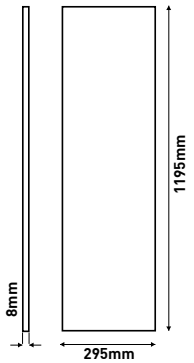




CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	COLOR	PACKING	MOQ
E.145-56163	5207227058561	40W	6500K	115 lm/watt	WHITE	1/5	1
E.145-56164	5207227058585	40W	4000K	113 lm/watt	WHITE	1/5	1
E.145-56165	5207227058608	40W	3000K	110 lm/watt	WHITE	1/5	1

- PANELES BACKLIGHT EMPOTRADOS
- BACKLIGHT PANELS RESESSED

MATERIAL DE PRODUCCION: **PMMA / METAL**
PRODUCTION MATERIAL: **PMMA / METALIC**

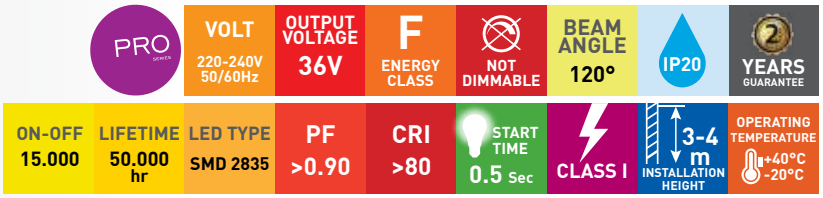




White Box with Sticker
PACKING



€ BEST PRICE



SAMSUNG LED



575x575mm
CUTTING DIMENSION




E.145-56192

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-56143	5207227123115	48W	6500K	105 lm/watt	1.533 Kg	WHITE	1/8	1
E.145-56144	5207227123139	48W	4000K	105 lm/watt	1.533 Kg	WHITE	1/8	1
E.145-56145	5207227123146	48W	3000K	105 lm/watt	1.533 Kg	WHITE	1/8	1
E.145-56192	5207227158827	MUELLE DE FIJACION (CLIP) PARA BACKLIGHT LED SET 4 PCS SPRING FASTENER (CLIP) FOR LED BACKLITE SET 4 PCS						1

€ BEST PRICE



SAMSUNG LED

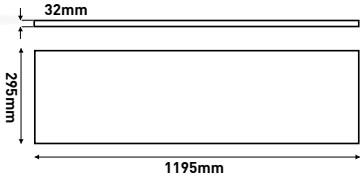


1175x275mm
CUTTING DIMENSION

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-56146	5207227123153	45W	6500K	105 lm/watt	2.110 Kg	WHITE	1/5	1
E.145-56147	5207227123177	45W	4000K	105 lm/watt	2.110 Kg	WHITE	1/5	1
E.145-56148	5207227123092	45W	3000K	105 lm/watt	2.110 Kg	WHITE	1/5	1



• PANELES BACKLIGHT DE SUPERFICIE
• BACKLIGHT PANELS SURFACE MOUNTED

MATERIAL DE PRODUCCION: **PMMA / METAL**
PRODUCTION MATERIAL: **PMMA / METALIC**

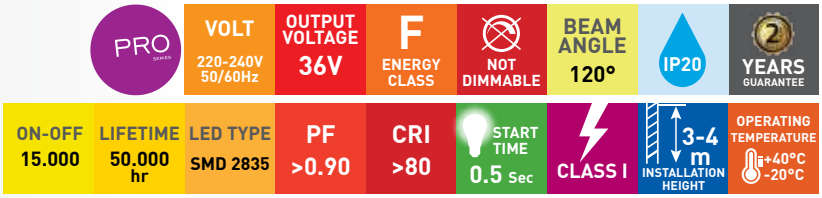





White Box with Sticker
PACKING



SAMSUNG LED

€BEST PRICE

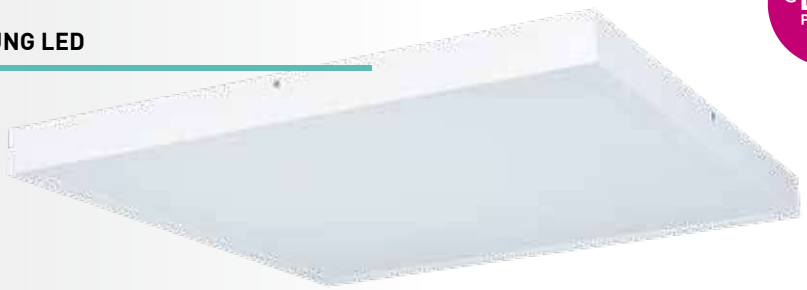




CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-56153	5207227159268	48W	6500K	105 lm/watt	2.224 Kg	WHITE	1/8	1
E.145-56154	5207227159282	48W	4000K	105 lm/watt	2.224 Kg	WHITE	1/8	1
E.145-56155	5207227159305	48W	3000K	105 lm/watt	2.224 Kg	WHITE	1/8	1

SAMSUNG LED

€BEST PRICE



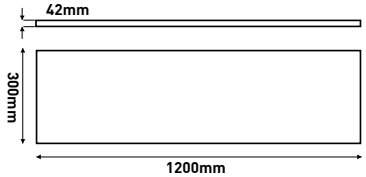

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-56156	5207227159329	45W	6500K	105 lm/watt	1.182 Kg	WHITE	1/5	1
E.145-56157	5207227159343	45W	4000K	105 lm/watt	1.182 Kg	WHITE	1/5	1
E.145-56158	5207227159367	45W	3000K	105 lm/watt	1.182 Kg	WHITE	1/5	1

- DRIVERS REGULABLES PARA PANELES LED
- DIMMABLE DRIVERS FOR LED PANEL LIGHTS

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



DIMMING

VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 3-42V DC | LIFETIME 50.000 hr | PF >0.95 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP20 | 5 YEARS GUARANTEE



Nylon Bag with Sticker PACKING

CODE	BARCODE	WATT	DIMENSIONS	DIMMING	WEIGHT	COLOR	PACKING	MOQ
E.145-56193	5207227124006	40W	103x68x30mm	DALI	0.172 Kg	WHITE	1/48	1
E.145-56194	5207227124013	40W	103x68x30mm	DALI & 1-10V DC	0.172 Kg	WHITE	1/48	1



DIMMING

VOLT 100-240V 50/60Hz | OUTPUT VOLTAGE 27-42V DC | LIFETIME 25.000 hr | PF >0.95 | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



Nylon Bag with Sticker PACKING

CODE	BARCODE	WATT	DIMENSIONS	DIMMING	WEIGHT	COLOR	PACKING	MOQ
E.145-56195	5206139044532	40W	140x65x30mm	1-10DC	0.185 Kg	WHITE	1/50	1



VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 27-40V DC | AMPERAGE 950 mA | LIFETIME 30.000 hr | PF >0.90 | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-56139	5207227038020	40W	116x40x30mm	0.100 Kg	WHITE	1/80	1





E.145-56196 5207227026188

BASE DE SUPERFICIE PARA PANEL LED BLANCO

SURFACE BASE FOR LIGHT PANEL LED WHITE

60x60x4.3

1/25 MOQ 1

kg 0.470Kg



E.145-56197 5207227031298


BASE DE SUPERFICIE PARA PANEL DE LUZ LED BLANCO

SURFACE BASE FOR LIGHT PANEL LED WHITE

120x30x4.3

1/25 MOQ 1

kg 0.570Kg

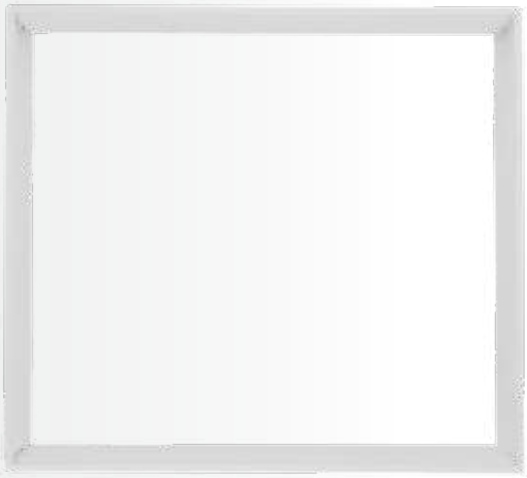

E.145-68095 5207227060335

MARCO ADAPTADOR PARA PANEL LED 60x60cm

ADAPTOR FRAME FOR LED PANEL 60x60cm

62,5x62,5CM

1/1 MOQ 1



E.145-56190 5206139052278

CABLE DE SUSPENSION METALICO PARA PANEL LED

METAL SUSPENDING WIRE FOR LED PANEL

1/100 MOQ 1



E.145-56191 5207227058615

MUELLE DE FIJACION (CLIP) PARA PANEL LED

SPRING FASTENER (CLIP) FOR LED PANEL

1/100 MOQ 1

- KIT EMERGENCIA LED
- LED EMERGENCY KIT

DRIVER DE EMERGENCIA Bateria UNIVERSAL
UNIVERSAL BATTERY EMERGENCY DRIVER



EMERGENCY LIGHT KIT




White Box with Sticker PACKING

VOLT 220-240V 50/60Hz | 12-80W | 24h CHARGING TIME | 60-120min DISCHARGE TIME | LIFETIME 15.000 hr | PF >0.90 | 2.300 kg | OPERATING TEMPERATURE +70°C -25°C | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	BATTERY TYPE	PACKING	MOQ
E.145-56180	5207227058882	Lithium 7.4V / 2200mAh	1/50	1


* Puedes convertir cualquier luminaria Led a luz de emergencia desde 12-80W.


* You can covert any fixture Led to emergency light from 12-80W.

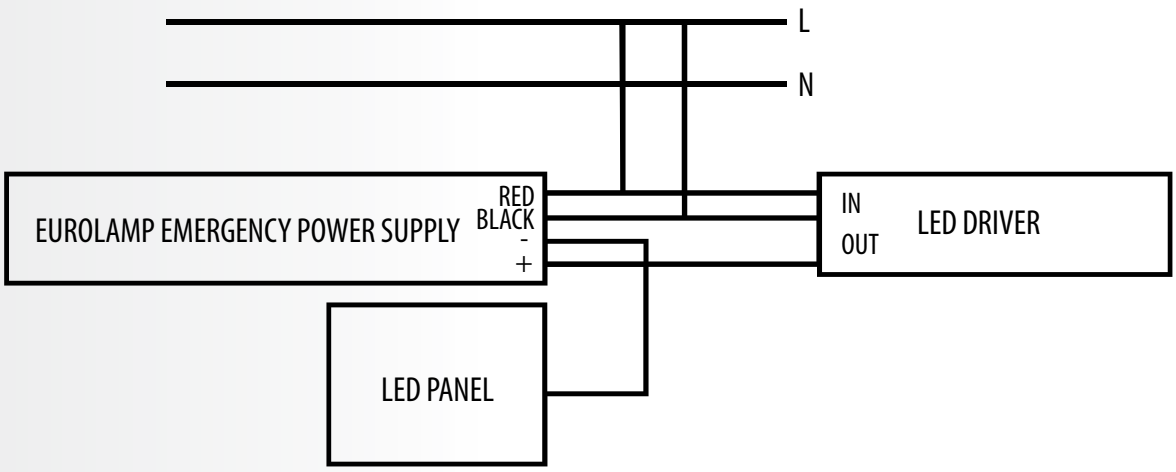



• Luminarias Led Empotrables
• LED Recessed Fixtures

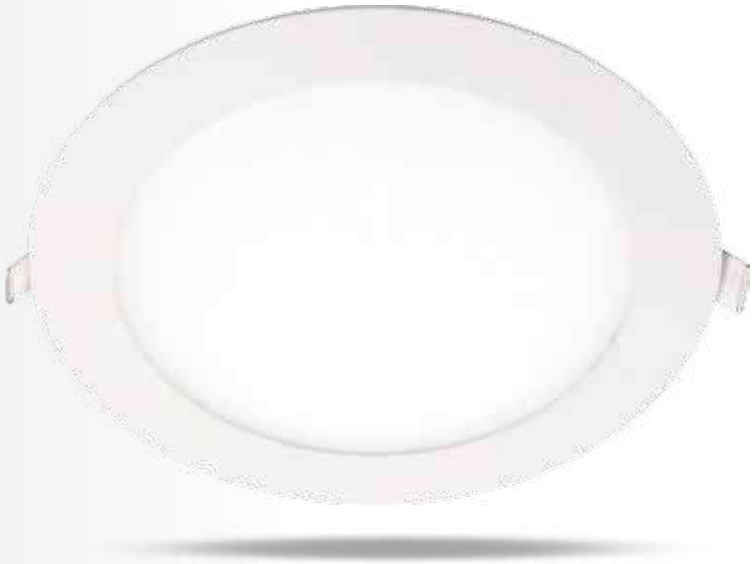

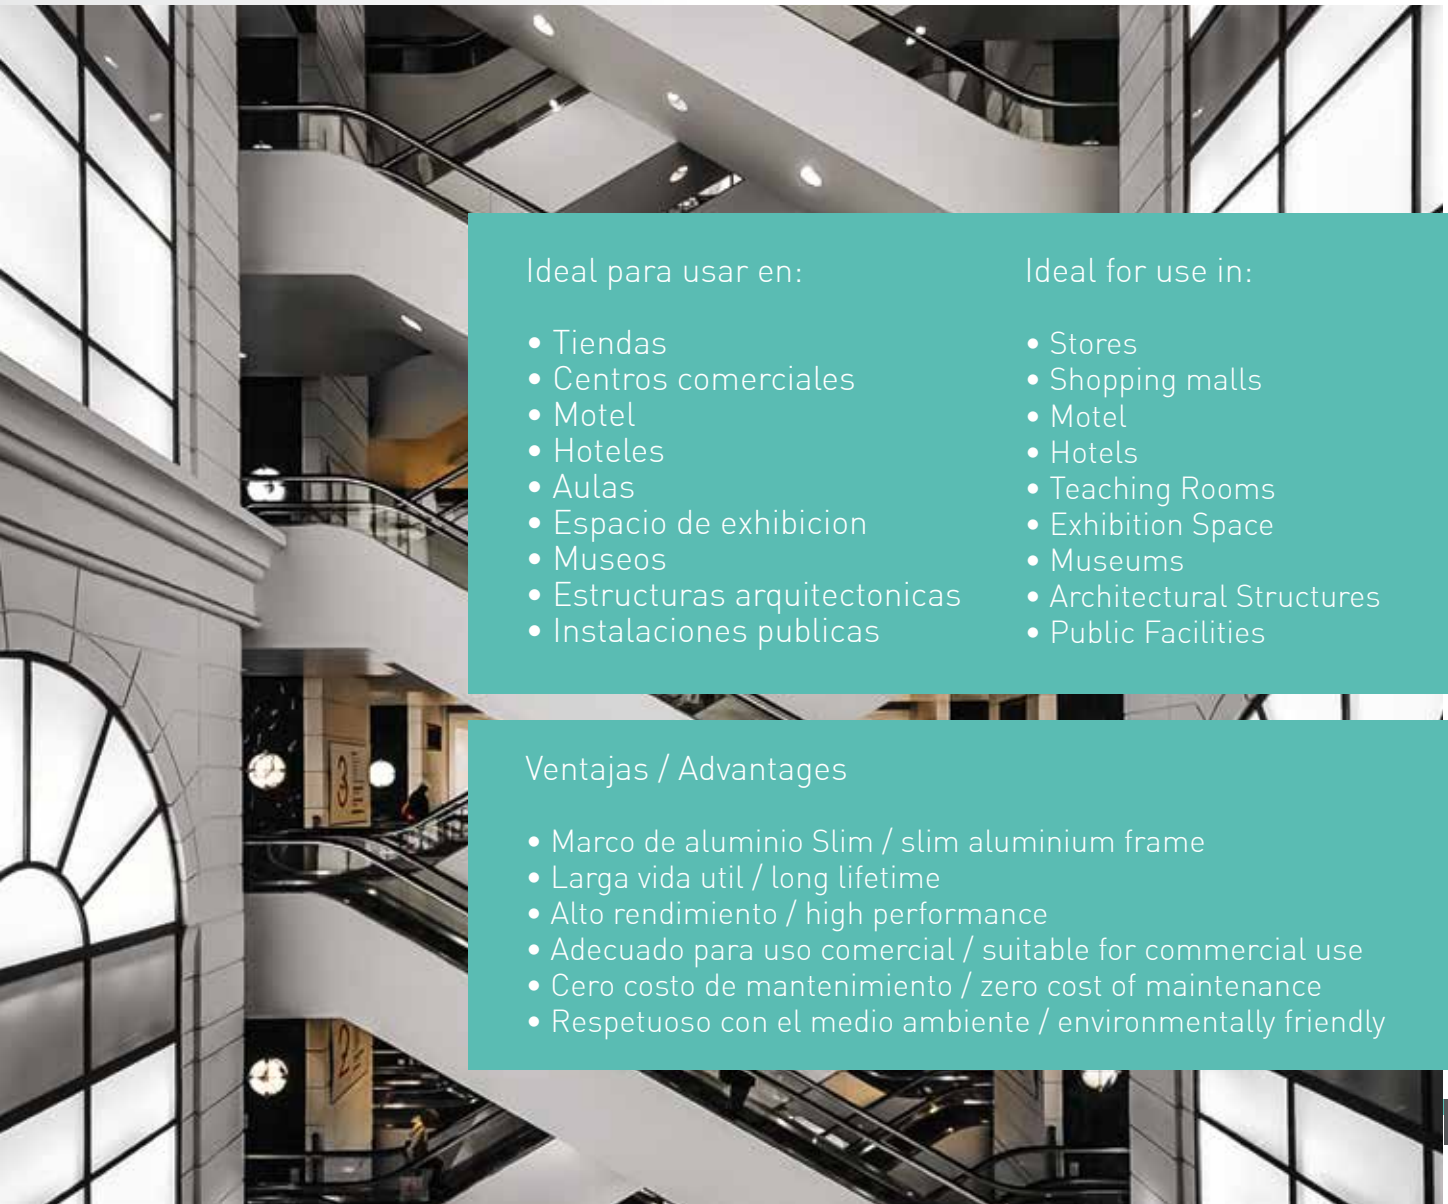

Ideal para usar en:

- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Stores
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Marco de aluminio Slim / slim aluminium frame
- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly


- LUMINARIAS LED EMPOTRABLES SLIM
- LED RECESSED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

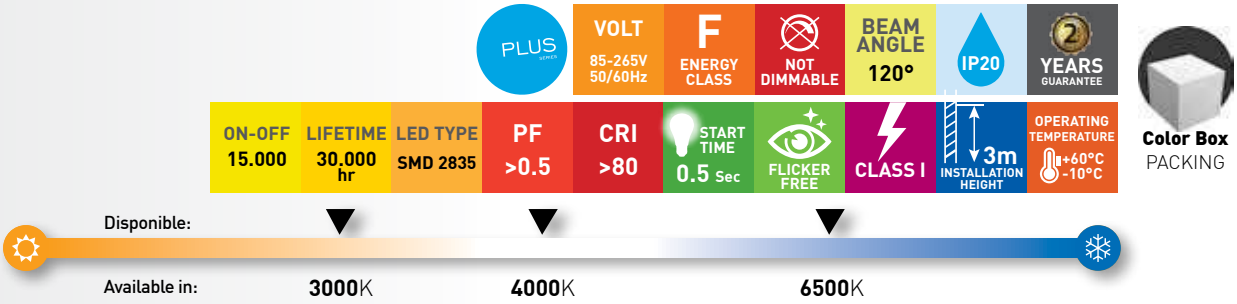


Color Box
PACKING



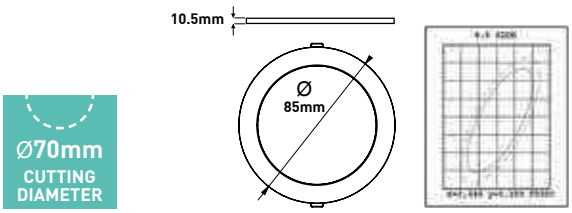


CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68600	5206139014931	3W	6500K	90 lm/watt	0.085kg	WHITE	1/10/60	1
E.145-68601	5206139037190	3W	4000K	90 lm/watt	0.085kg	WHITE	1/10/60	1
E.145-68602	5207227020544	3W	3000K	90 lm/watt	0.085kg	WHITE	1/10/60	1
E.145-68604	5206139037206	3W	4000K	90 lm/watt	0.085kg	SATIN	1/10/60	1



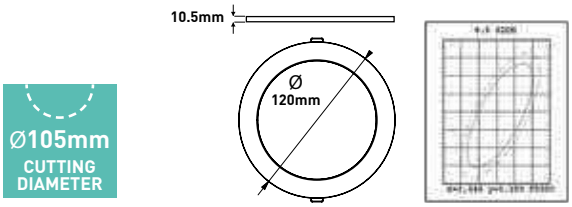

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68606	5207227020568	6W	6500K	90 lm/watt	0.120kg	WHITE	1/10/40	1
E.145-68607	5207227124037	6W	4000K	90 lm/watt	0.120kg	WHITE	1/10/40	1
E.145-68608	5207227020582	6W	3000K	90 lm/watt	0.120kg	WHITE	1/10/40	1



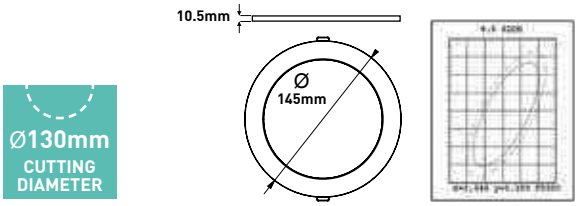

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68609	5207227020605	9W	6500K	90 lm/watt	0.170kg	WHITE	1/20	1
E.145-68610	5207227124051	9W	4000K	90 lm/watt	0.170kg	WHITE	1/20	1
E.145-68611	5207227020629	9W	3000K	90 lm/watt	0.170kg	WHITE	1/20	1




• LUMINARIAS LED EMPOTRABLES SLIM
• LED RECESSED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**



Ø155mm CUTTING DIAMETER






F ENERGY CLASS


2 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68612	5207227020643	12W	6500K	90 lm/watt	0.215kg	WHITE	1/20	1
E.145-68613	5207227124075	12W	4000K	90 lm/watt	0.215kg	WHITE	1/20	1
E.145-68614	5207227020667	12W	3000K	90 lm/watt	0.215kg	WHITE	1/20	1

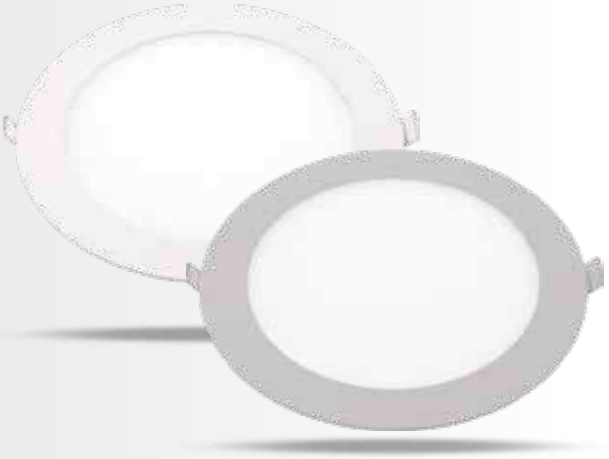

★TOP QUALITY

Ø210mm CUTTING DIAMETER






E ENERGY CLASS

3 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68400	5207227033551	18W	6500K	105 lm/watt	0.360kg	WHITE	1/20	1
E.145-68401	5207227033568	18W	4000K	103 lm/watt	0.360kg	WHITE	1/20	1
E.145-68402	5207227033575	18W	3000K	95 lm/watt	0.360kg	WHITE	1/20	1
E.145-68410	5207227033599	18W	6500K	105 lm/watt	0.360kg	SATIN	1/20	1
E.145-68411	5207227033612	18W	4000K	103 lm/watt	0.360kg	SATIN	1/20	1
E.145-68412	5207227033636	18W	3000K	95 lm/watt	0.360kg	SATIN	1/20	1



210x210mm CUTTING DIMENSION






F ENERGY CLASS

3 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68020	5206139026224	20W	6500K	90 lm/watt	0.360kg	WHITE	1/20	1
E.145-68021	5206139098900	20W	4000K	90 lm/watt	0.360kg	WHITE	1/20	1
E.145-68022	5207227124099	20W	3000K	90 lm/watt	0.360kg	WHITE	1/20	1

- LUMINARIAS LED EMPOTRABLES SLIM
- LED RECESSED SLIM LIGHT FIXTURES


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

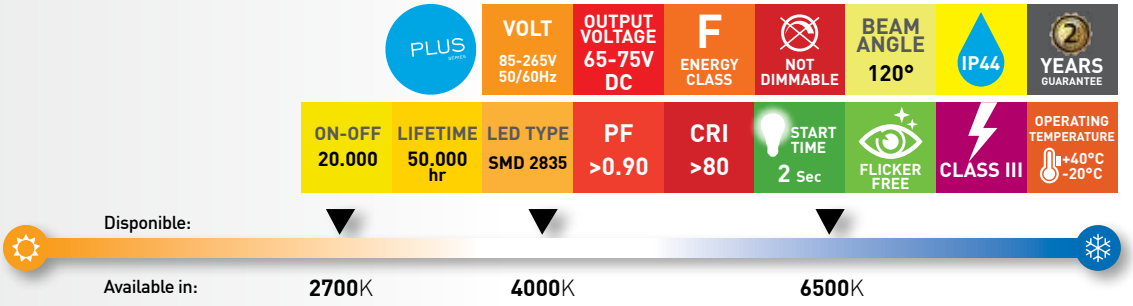




Brown Box with Sticker
PACKING











CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68430	5207227120961	25W	6500K	105 lm/watt	0.540kg	WHITE	1/20	1
E.145-68431	5207227120985	25W	4000K	103 lm/watt	0.540kg	WHITE	1/20	1
E.145-68432	5207227120992	25W	3000K	95 lm/watt	0.540kg	WHITE	1/20	1











CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68433	5207227121005	30W	6500K	105 lm/watt	0.540kg	WHITE	1/20	1
E.145-68434	5207227121012	30W	4000K	103 lm/watt	0.540kg	WHITE	1/20	1
E.145-68435	5207227121029	30W	3000K	95 lm/watt	0.540kg	WHITE	1/20	1











CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68436	5207227121036	40W	6500K	105 lm/watt	0.540kg	WHITE	1/20	1
E.145-68437	5207227121043	40W	4000K	103 lm/watt	0.540kg	WHITE	1/20	1
E.145-68438	5207227121050	40W	3000K	95 lm/watt	0.540kg	WHITE	1/20	1



• LUMINARIAS LED EMPOTRABLES SLIM
• LED RECESSED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

VALUE | VOLT 85-265V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 1 YEAR GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS I | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +60°C -10°C




Color Box
PACKING

Disponible:
Available in: **3000**K **4000**K **6500**K



€BEST PRICE

Ø210mm CUTTING DIAMETER





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68000	5206139037824	20W	6500K	90 lm/watt	0.335kg	SATIN	1/20	1
E.145-68001	5206139037213	20W	4000K	90 lm/watt	0.335kg	SATIN	1/20	1
E.145-68010	5206139021427	20W	6500K	90 lm/watt	0.335kg	WHITE	1/20	1
E.145-68011	5206139021434	20W	4000K	90 lm/watt	0.335kg	WHITE	1/20	1
E.145-68012	5206139021441	20W	3000K	90 lm/watt	0.335kg	WHITE	1/20	1



• ADAPTOR FRAME FROM Ø240 TO Ø225 ALUMINIUM
• MARCO ADAPTADOR DE Ø240 TO Ø225 ALUMINIO

CODE	BARCODE	COLOR	PACKING	MOQ
E.145-68099	5207227072178	SILVER	1/1	1

E.147-68096



E.147-68097



E.147-68098



VOLT 85-265V 50/60Hz | ON-OFF 15.000 | LIFETIME 30.000 hr | PF >0.90 | START TIME 0.5 Sec | CLASS I | OPERATING TEMPERATURE +60°C -10°C | IP20



White Box with Sticker
PACKING

CODE	BARCODE	DESCRIPTION	WATT	OUTPUT VOLTAGE	GUARANTEE	PACKING	MOQ
E.145-68096	5207227035494	DRIVER PARA PANEL LED SLIM POWER SUPPLY (DRIVER) FOR LED PANEL	20W	38V-64V	3 YEARS	1/100	1
E.145-68097	5207227039409	DRIVER PARA PANEL LED SLIM POWER SUPPLY (DRIVER) FOR LED PANEL	20W	38V-64V	1 YEAR	1/200	1
E.145-68098	5207227110719	DRIVER PARA PANEL LED SLIMPOWER SUPPLY (DRIVER) FOR LED PANEL	24W	60V-72V	3 YEARS	1/100	1

- LUMINARIAS LED SLIM EMPOTRABLES CON CORTE AJUSTABLE
- LED RECESSED SLIM LIGHT FIXTURES WITH ADJUSTABLE CUT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


PLUS | VOLT 85-265V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS I | OPERATING TEMPERATURE +60°C -10°C

Color Box
PACKING

Disponible:
Available in: **3000**K **4000**K **6500**K








2m INSTALLATION HEIGHT

Ø50-110mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68423	5207227071911	8W	6500K	105 lm/watt	0.240kg	WHITE	1/40	1
E.145-68424	5207227071928	8W	4000K	103 lm/watt	0.240kg	WHITE	1/40	1
E.145-68425	5207227071935	8W	3000K	95 lm/watt	0.240kg	WHITE	1/40	1







3m INSTALLATION HEIGHT

Ø50-205mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68420	5207227033650	20W	6500K	105 lm/watt	0.340kg	WHITE	1/20	1
E.145-68421	5207227033674	20W	4000K	103 lm/watt	0.340kg	WHITE	1/20	1
E.145-68422	5207227033698	20W	3000K	95 lm/watt	0.340kg	WHITE	1/20	1



• DOWNLIGHT EMPOTRABLES LED COB
• LED RECESSED LIGHT FIXTURES COB

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

PLUS | VOLT 170-240V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 30.000 hr | LED TYPE COB 7660 | PF >0.50 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS I | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C




White Box with Sticker PACKING

Disponible:

Available in: **4000**K **6500**K





Ø200mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68201	5206139025081	30W	6500K	90 lm/watt	0.475kg	WHITE	1/20	1
E.145-68202	5206139098665	30W	4000K	90 lm/watt	0.475kg	WHITE	1/20	1

PLUS | VOLT 85-265V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 50° | IP20 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 30.000 hr | LED TYPE COB 1428 | PF >0.90 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS I | 6m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C




White Box with Sticker PACKING

Disponible:

Available in: **4000**K **6500**K






Ø200mm CUTTING DIAMETER


CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68205	5207227008375	55W	6500K	90 lm/watt	1.410kg	WHITE	1/10	1
E.145-68206	5207227002502	55W	4000K	90 lm/watt	1.410kg	WHITE	1/10	1

- EMPOTRABLE RECTANGULAR LED
- RECESSED LED LIGHT PARALLELOGRAM

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

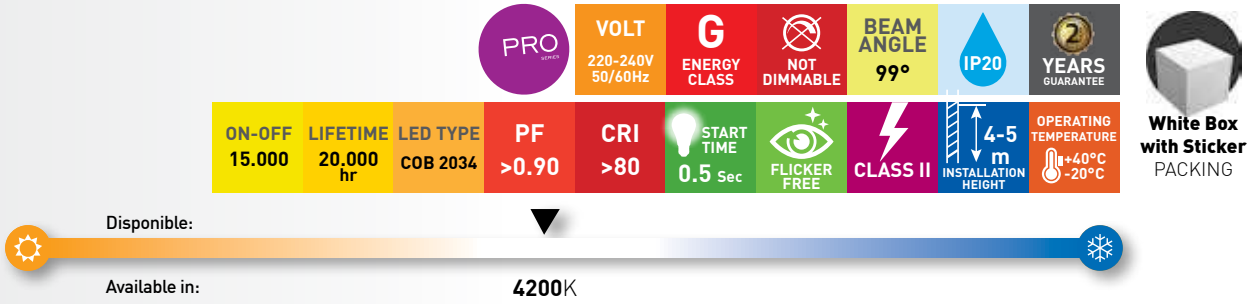




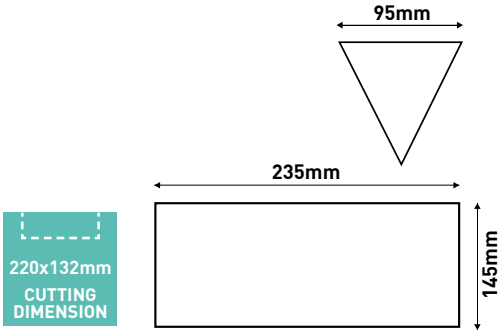

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68251	5207227019098	45W	4200K	58 lm/watt	1.250kg	WHITE	1/8	1


- DOWNLIGHT EMPOTRABLES WOTHA
- LED RECESSED LIGHT FIXTURES WOTHA

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

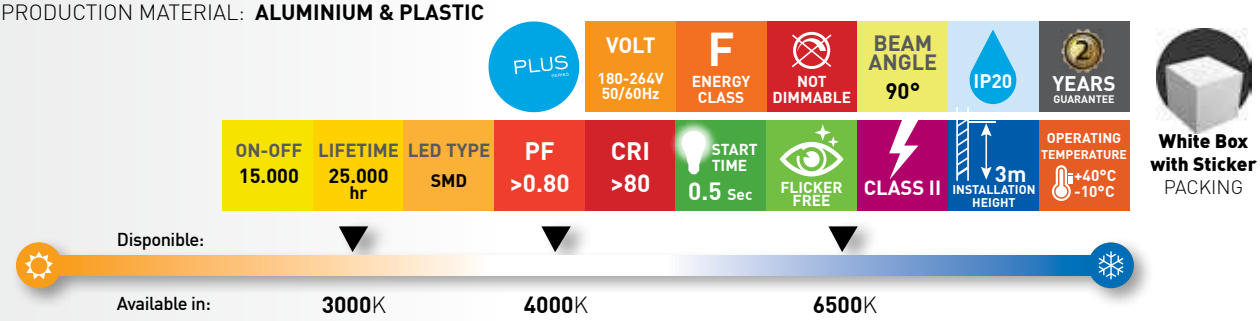





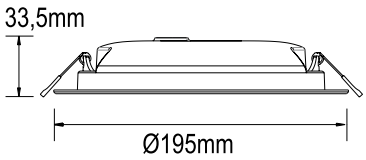



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9525-613	8434067007214	12W	3000K	90 lm/watt	0.535kg	WHITE	1/10	1
9525-614	8434067007221	12W	4000K	90 lm/watt	0.535kg	WHITE	1/10	1
9525-616	8434067007269	12W	6000K	90 lm/watt	0.535kg	WHITE	1/10	1

• DOWNLIGHT EMPOTRABLES DINO
• LED RECESSED LIGHT FIXTURES DINO

MATERIAL DE PRODUCCION: **ALUMINIO Y PMMA**
PRODUCTION MATERIAL: **ALUMINIUM & PMMA**





PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP54 | 5 YEARS GUARANTEE

ON-OFF 20.000 | LIFETIME 30.000 hr | LED TYPE SAMSUNG | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




White Box with Sticker PACKING


Disponible:

Available in: **3000**K (3)* **4000**K (4)*

DINO L








DRIVER PHILIPS




DINO S





DINO M





CODE	SERIE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	DIAMETER	MOQ
TZ.C109.S0.01._*	DINO S	12W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø190	1
TZ.C109.S1.01._*	DINO S	18W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø190	1
TZ.C109.S2.01._*	DINO S	30W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø190	1
TZ.C109.M0.01._*	DINO M	12W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø230	1
TZ.C109.M1.01._*	DINO M	18W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø230	1
TZ.C109.M2.01._*	DINO M	30W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø230	1
TZ.C109.L0.01._*	DINO L	12W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø285	1
TZ.C109.L1.01._*	DINO L	18W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø285	1
TZ.C109.L2.01._*	DINO L	30W	3/4*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	Ø285	1

• EASY

PRO | VOLT 220-240V 50/60Hz | D ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 80° | IP44 | 5 YEARS GUARANTEE

ON-OFF 40.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C



White Box with Sticker PACKING


DRIVER TRIDONIC




87500751 500mA
87500757 700mA









CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
G2608.01.18._*	-	17,5W	3/4*	158 lm/watt	1.010kg	MATT WHITE/BLANCO MATE	1/12	1
G2608.01.25._*	-	25,3W	3/4*	148 lm/watt	1.010kg	MATT WHITE/BLANCO MATE	1/12	1

- DOWNLIGHT EMPOTRABLES IPSUM
- LED RECESSED LIGHT FIXTURES IPSUM

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**












White Box with Sticker
PACKING



MATT BLACK
NEGRO MATE

BRASS ANTIQUE
ORO VIEJO




NIKEL SATIN
NIQUEL SAT

MATT CHROME
CROMO MATE

MATT WHITE
BLANCO MATE






Ø200mm
CUTTING
DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9516-61M20_*	-	27W	3/4*	120 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	1/12	1
9516-6220_*	-	27W	3/4*	120 lm/watt	0.490kg	MATT BLACK/NEGRO MATE	1/12	1
9516-63V20_*	-	27W	3/4*	120 lm/watt	0.490kg	BRASS ANTIQUE/ORO VIEJO	1/12	1
9516-65M0_*	-	27W	3/4*	120 lm/watt	0.490kg	MATT CHROME/CROMO MATE	1/12	1
9516-6NS20_*	-	27W	3/4*	120 lm/watt	0.490kg	NIKEL SATIN/NIQUEL SAT	1/12	1

MATT BLACK
NEGRO MATE


BRASS ANTIQUE
ORO VIEJO

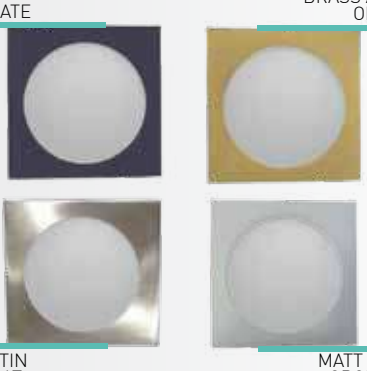


NIKEL SATIN
NIQUEL SAT

MATT CHROME
CROMO MATE

MATT WHITE
BLANCO MATE

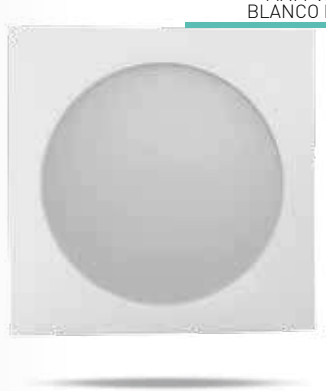



Ø200mm
CUTTING
DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9519-61M20_*	-	27W	3/4*	120 lm/watt	0.570kg	MATT WHITE/BLANCO MATE	1/12	1
9519-6220_*	-	27W	3/4*	120 lm/watt	0.570kg	MATT BLACK/NEGRO MATE	1/12	1
9519-63V20_*	-	27W	3/4*	120 lm/watt	0.570kg	BRASS ANTIQUE/ORO VIEJO	1/12	1
9519-65M0_*	-	27W	3/4*	120 lm/watt	0.570kg	MATT CHROME/CROMO MATE	1/12	1
9519-6NS20_*	-	27W	3/4*	120 lm/watt	0.570kg	NIKEL SATIN/NIQUEL SAT	1/12	1



• DOWNLIGHT EMPOTRABLES IPSUM II
• LED RECESSED LIGHT FIXTURES IPSUM II

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**





White Box with Sticker
PACKING

Disponible:

Available in: **3000**K (3)* **4000**K (4)*

GOLD
B. ORO

BRASS ANTIQUE
ORO VIEJO




MATT CHROME
CROMO MATE

CHROME
CROMO

MATT WHITE
BLANCO MATE





Ø210mm
CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9517-6120_*	-	27W	3/4*	120 lm/watt	0.680kg	WHITE/BLANCO	1/6	1
9517-6320_*	-	27W	3/4*	120 lm/watt	0.680kg	GOLD/B. ORO	1/6	1
9517-63V20_*	-	27W	3/4*	120 lm/watt	0.680kg	BRASS ANTIQUE/ORO VIEJO	1/6	1
9517-6CM0_*	-	27W	3/4*	120 lm/watt	0.680kg	MATT CHROME/CROMO MATE	1/6	1
9517-6520_*	-	27W	3/4*	120 lm/watt	0.680kg	CHROME/CROMO	1/6	1

GOLD
B. ORO

BRASS ANTIQUE
ORO VIEJO




MATT CHROME
CROMO MATE

CHROME
CROMO

MATT WHITE
BLANCO MATE






Ø210mm
CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9518-6120_*	-	27W	3/4*	120 lm/watt	0.740kg	WHITE/BLANCO	1/6	1
9518-6320_*	-	27W	3/4*	120 lm/watt	0.740kg	GOLD/B. ORO	1/6	1
9518-63V20_*	-	27W	3/4*	120 lm/watt	0.740kg	BRASS ANTIQUE/ORO VIEJO	1/6	1
9518-6CM0_*	-	27W	3/4*	120 lm/watt	0.740kg	MATT CHROME/CROMO MATE	1/6	1
9518-6520_*	-	27W	3/4*	120 lm/watt	0.740kg	CHROME/CROMO	1/6	1

- DOWNLIGHT EMPOTRABLES IPSUM ECO
- LED RECESSED LIGHT FIXTURES IPSUM ECO

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

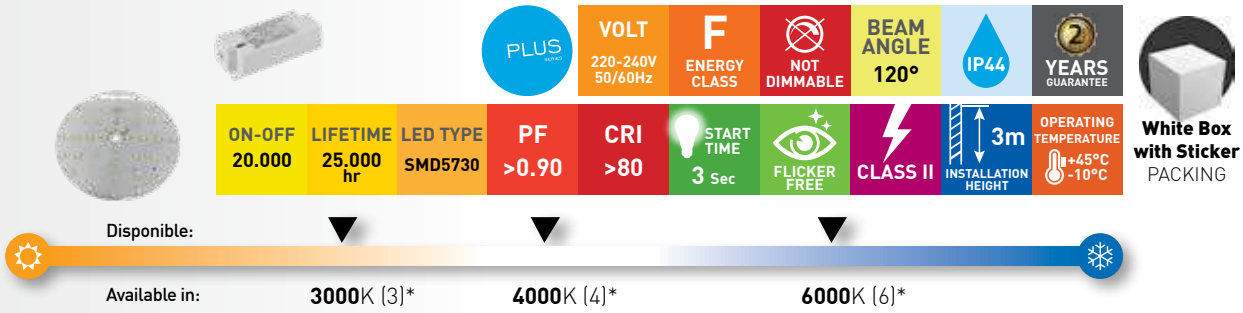





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9526-61M20_*	-	23W	3/4/6*	100 lm/watt	0.490kg	MATT WHITE/BLANCO MATE	1/12	1
9526-6220_*	-	23W	3/4/6*	100 lm/watt	0.490kg	MATT BLACK/NEGRO MATE	1/12	1
9526-63V20_*	-	23W	3/4/6*	100 lm/watt	0.490kg	BRASS ANTIQUE/ORO VIEJO	1/12	1
9526-65M0_*	-	23W	3/4/6*	100 lm/watt	0.490kg	MATT CHROME/CROMO MATE	1/12	1
9526-6NS20_*	-	23W	3/4/6*	100 lm/watt	0.490kg	NIKEL SATIN/NIQUEL SAT	1/12	1





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9529-61M20_*	-	23W	3/4/6*	100 lm/watt	0.570kg	MATT WHITE/BLANCO MATE	1/12	1
9529-6220_*	-	23W	3/4/6*	100 lm/watt	0.570kg	MATT BLACK/NEGRO MATE	1/12	1
9529-63V20_*	-	23W	3/4/6*	100 lm/watt	0.570kg	BRASS ANTIQUE/ORO VIEJO	1/12	1
9529-65M0_*	-	23W	3/4/6*	100 lm/watt	0.570kg	MATT CHROME/CROMO MATE	1/12	1
9529-6NS20_*	-	23W	3/4/6*	100 lm/watt	0.570kg	NIKEL SATIN/NIQUEL SAT	1/12	1



• DOWNLIGHT EMPOTRABLES IPSUM II ECO
• LED RECESSED LIGHT FIXTURES IPSUM II ECO

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**





PLUS

VOLT 198-268V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP43 | 2 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE TRIDONIC | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C



White Box with Sticker PACKING

Disponible:

Available in: **3000**K (3)* **4000**K (4)* **6000**K (6)*

GOLD
B. ORO

BRASS ANTIQUE
ORO VIEJO




MATT CHROME
CROMO MATE

CHROME
CROMO

MATT WHITE
BLANCO MATE





Ø210mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9527-6120_*	-	23W	3/4/6*	100 lm/watt	0.680kg	WHITE/BLANCO	1/6	1
9527-6320_*	-	23W	3/4/6*	100 lm/watt	0.680kg	GOLD/B. ORO	1/6	1
9527-63V20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	BRASS ANTIQUE/ORO VIEJO	1/6	1
9527-6CM0_*	-	23W	3/4/6*	100 lm/watt	0.680kg	MATT CHROME/CROMO MATE	1/6	1
9527-6520_*	-	23W	3/4/6*	100 lm/watt	0.680kg	CHROME/CROMO	1/6	1

GOLD
B. ORO

BRASS ANTIQUE
ORO VIEJO




MATT CHROME
CROMO MATE

CHROME
CROMO

MATT WHITE
BLANCO MATE





Ø210mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9528-6120_*	-	23W	3/4/6*	100 lm/watt	0.740kg	WHITE/BLANCO	1/6	1
9528-6320_*	-	23W	3/4/6*	100 lm/watt	0.740kg	GOLD/B. ORO	1/6	1
9528-63V20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	BRASS ANTIQUE/ORO VIEJO	1/6	1
9528-6CM0_*	-	23W	3/4/6*	100 lm/watt	0.740kg	MATT CHROME/CROMO MATE	1/6	1
9528-6520_*	-	23W	3/4/6*	100 lm/watt	0.740kg	CHROME/CROMO	1/6	1

- DOWNLIGHT EMPOTRABLES IPSUM MADERA
- LED RECESSED LIGHT FIXTURES IPSUM MADERA

MATERIAL DE PRODUCCION: **MADERA, ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **WOOD, ALUMINIUM & PLASTIC**





PRO | VOLT 198-268V 50/60Hz | E ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP44 | 5 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE TRIDONIC | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C



White Box with Sticker PACKING

Disponible:
Available in: **3000**K (3)* **4000**K (4)*

CEMENT EFFECT
EFECTO CEMENTO




PINE TREE
PINO



AGED WOOD
ENVEJECIDO







OAK
ROBLE



WALNUT
NOGAL

Ø200mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9516-6M1.20_*	-	27W	3/4*	120 lm/watt	0.680kg	AGED WOOD / ENVEJECIDO	1/6	1
9516-6M2.20_*	-	27W	3/4*	120 lm/watt	0.680kg	CEMENT EFFECT/ EFECTO CEMENTO	1/6	1
9516-6M3.20_*	-	27W	3/4*	120 lm/watt	0.680kg	PINE TREE / PINO	1/6	1
9516-6M4.20_*	-	27W	3/4*	120 lm/watt	0.680kg	OAK / ROBLE	1/6	1
9516-6M5.20_*	-	27W	3/4*	120 lm/watt	0.680kg	WALNUT / NOGAL	1/6	1

AGED WOOD
ENVEJECIDO




CEMENT EFFECT
EFECTO CEMENTO



OAK
ROBLE







PINE TREE
PINO



WALNUT
NOGAL

Ø200mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9519-6M1.20_*	-	27W	3/4*	120 lm/watt	0.740kg	AGED WOOD / ENVEJECIDO	1/6	1
9519-6M2.20_*	-	27W	3/4*	120 lm/watt	0.740kg	CEMENT EFFECT/ EFECTO CEMENTO	1/6	1
9519-6M3.20_*	-	27W	3/4*	120 lm/watt	0.740kg	PINE TREE / PINO	1/6	1
9519-6M4.20_*	-	27W	3/4*	120 lm/watt	0.740kg	OAK / ROBLE	1/6	1
9519-6M5.20_*	-	27W	3/4*	120 lm/watt	0.740kg	WALNUT / NOGAL	1/6	1



• DOWNLIGHT EMPOTRABLES IPSUM MADERA ECO
• LED RECESSED LIGHT FIXTURES IPSUM MADERA ECO

MATERIAL DE PRODUCCION: **MADERA, ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **WOOD, ALUMINIUM & PLASTIC**





PLUS

VOLT 198-268V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP44 | 2 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE TRIDONIC | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C



White Box with Sticker PACKING


Disponible:

Available in: **3000**K (3)* **4000**K (4)* **6000**K (6)*

AGED WOOD
ENVEJECIDO

PINE TREE
PINO

CEMENT EFFECT
EFECTO CEMENTO





OAK
ROBLE

WALNUT
NOGAL


Ø200mm
CUTTING
DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9526-6M1.20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	AGED WOOD / ENVEJECIDO	1/6	1
9526-6M2.20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	CEMENT EFFECT/ EFECTO CEMENTO	1/6	1
9526-6M3.20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	PINE TREE / PINO	1/6	1
9526-6M4.20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	OAK / ROBLE	1/6	1
9526-6M5.20_*	-	23W	3/4/6*	100 lm/watt	0.680kg	WALNUT / NOGAL	1/6	1

AGED WOOD
ENVEJECIDO

CEMENT EFFECT
EFECTO CEMENTO

WALNUT
NOGAL





PINE TREE
PINO

OAK
ROBLE

Ø200mm
CUTTING
DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
9529-6M1.20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	AGED WOOD / ENVEJECIDO	1/6	1
9529-6M2.20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	CEMENT EFFECT/ EFECTO CEMENTO	1/6	1
9529-6M3.20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	PINE TREE / PINO	1/6	1
9529-6M4.20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	OAK / ROBLE	1/6	1
9529-6M5.20_*	-	23W	3/4/6*	100 lm/watt	0.740kg	WALNUT / NOGAL	1/6	1

- DOWNLIGHT EMPOTRABLES LED COB FAROS
- LED RECESSED LIGHT FIXTURES COB FAROS

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

DRIVER TRIDONIC
87500751 500mA
87500757 700mA



PRO | VOLT 198-268V 50/60Hz | D ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 41° | IP44 | 5 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




White Box with Sticker PACKING


Disponible:

Available in: **3000**K (3)* **4000**K (4)*

FAROS







Usually it is served in 41º and available in 16º and 24º.
De forma habitual se sirve en 41º y tambien esta disponible en 16º y 24º

Ø140mm CUTTING DIAMETER

CODE	SERIE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
G2607.41.18._*	FAROS	17,5W	3/4*	140 lm/watt	1.300kg	WHITE / BLANCO	1/6	1
G2607.41.25._*	FAROS	25,3W	3/4*	140 lm/watt	1.300kg	WHITE / BLANCO	1/6	1

DRIVER TRIDONIC
87500751 350mA
87500757 500mA



PRO | VOLT 198-268V 50/60Hz | D ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 60° | IP44 | 5 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




White Box with Sticker PACKING

Disponible:

Available in: **3000**K (3)* **4000**K (4)*

MIDI FAROS







Usually it is served in 60º and available in 24º and 40º.
De forma habitual se sirve en 60º y tambien esta disponible en 24º y 40º

Ø100mm CUTTING DIAMETER

CODE	SERIE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
G2609.60.12._*	MIDI FAROS	12 W	3/4*	140 lm/watt	0.390kg	WHITE / BLANCO	1/6	1
G2609.60.18._*	MIDI FAROS	17,5W	3/4*	140 lm/watt	0.390kg	WHITE / BLANCO	1/6	1



• DOWNLIGHT EMPOTRABLES LED THOLOS
• LED RECESSED LIGHT FIXTURES THOLOS

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

DRIVER TRIDONIC
87500751 500mA
87500757 700mA

PRO | VOLT 198-268V 50/60Hz | ENERGY CLASS E | NOT DIMMABLE | BEAM ANGLE 90° | IP65 | 5 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE SAMSUNG | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




White Box with Sticker PACKING

Disponible:

Available in: **3000**K (3)* **4000**K (4)*

THOLOS R





Ø160mm CUTTING DIAMETER

CODE	SERIE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
G6231.01._*	THOLOS R	25W	3/4*	130 lm/watt	0.660kg	WHITE / BLANCO	1/6	1
G6231.03._*	THOLOS R	25W	3/4*	130 lm/watt	0.660kg	BLACK / NEGRO	1/6	1
G6232.01._*	THOLOS R	33W	3/4*	130 lm/watt	0.660kg	WHITE / BLANCO	1/6	1
G6232.03._*	THOLOS R	33W	3/4*	130 lm/watt	0.660kg	BLACK / NEGRO	1/6	1

DRIVER TRIDONIC
87500751 350mA
87500757 500mA



PRO | VOLT 198-268V 50/60Hz | ENERGY CLASS D | NOT DIMMABLE | BEAM ANGLE 120° | IP54 | 5 YEARS GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE TRIDONIC | PF >0.95 | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS II | 3m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




White Box with Sticker PACKING

Disponible:

Available in: **3000**K (3)* **4000**K (4)*

THOLOS K



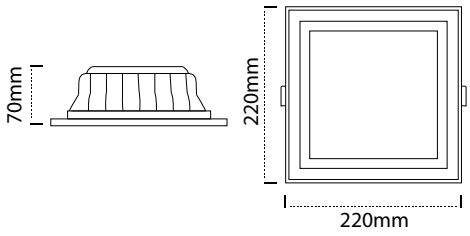


190x190mm CUTTING DIMENSION

CODE	SERIE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
G6231K.01.12._*	THOLOS K	12 W	3/4*	140 lm/watt	0.660kg	WHITE / BLANCO	1/6	1
G6231K.02.12._*	THOLOS K	12 W	3/4*	140 lm/watt	0.660kg	BLACK / NEGRO	1/6	1
G6231K.01.21._*	THOLOS K	21 W	3/4*	140 lm/watt	0.660kg	WHITE / BLANCO	1/6	1
G6231K.03.21._*	THOLOS K	21 W	3/4*	140 lm/watt	0.660kg	BLACK / NEGRO	1/6	1

• Panel LED SUPERFICIE
• LED Lighting Fixtures Surface Mounted



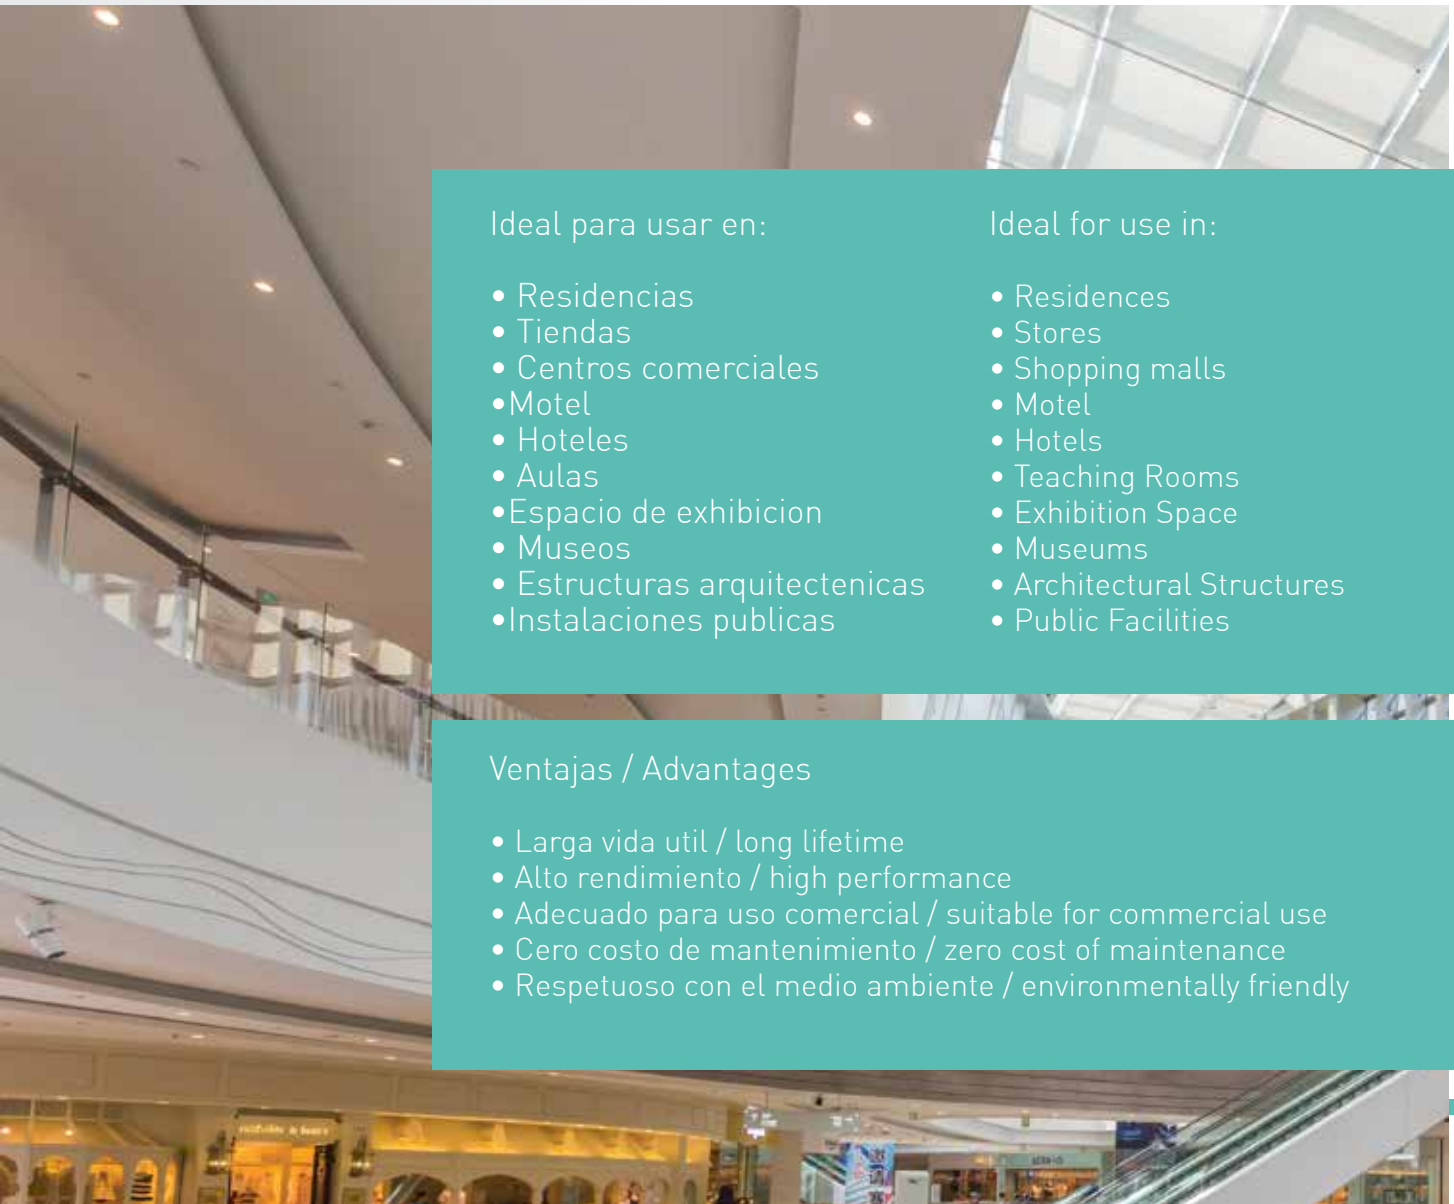

Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectenicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities


Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



• PANEL LED SLIM SUPERFICIE
• SURFACE LED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

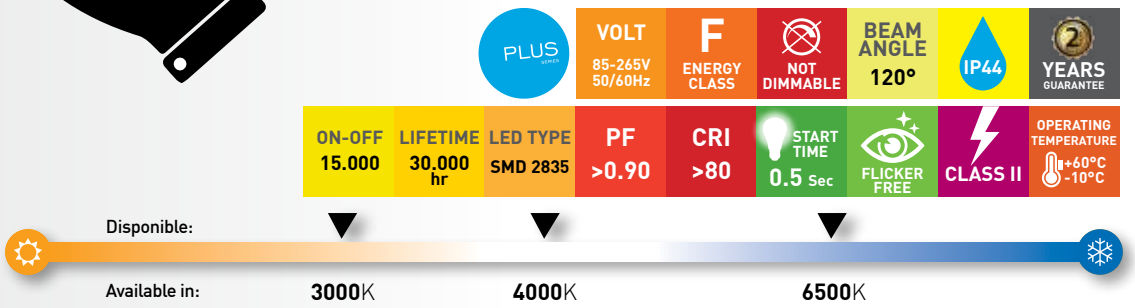




Color Box
PACKING











CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68500	5207227069468	6W	6500K	90 lm/watt	0.215kg	WHITE	1/40	1
E.145-68501	5207227069482	6W	4000K	90 lm/watt	0.215kg	WHITE	1/40	1
E.145-68502	5207227069505	6W	3000K	90 lm/watt	0.215kg	WHITE	1/40	1











CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68506	5207227069529	12W	6500K	90 lm/watt	0.320kg	WHITE	1/20	1
E.145-68507	5207227069543	12W	4000K	90 lm/watt	0.320kg	WHITE	1/20	1
E.145-68508	5207227069567	12W	3000K	90 lm/watt	0.320kg	WHITE	1/20	1

- PANEL LED SLIM SUPERFICIE
- SURFACE LED SLIM LIGHT FIXTURES


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**



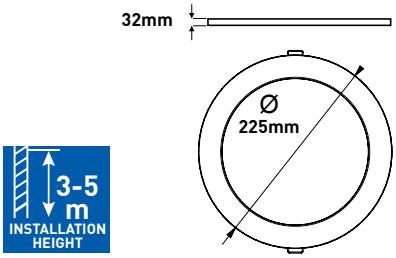

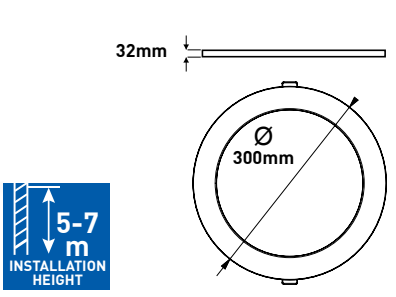

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68510	5207227124105	20W	6500K	90 lm/watt	0.450kg	WHITE	1/20	1
E.145-68511	5207227124112	20W	4000K	90 lm/watt	0.450kg	WHITE	1/20	1
E.145-68512	5207227124136	20W	3000K	90 lm/watt	0.450kg	WHITE	1/20	1
E.145-68513	5207227117640	24W	6500K	90 lm/watt	0.450kg	WHITE	1/20	1
E.145-68514	5207227117657	24W	4000K	90 lm/watt	0.450kg	WHITE	1/20	1
E.145-68515	5207227117664	24W	3000K	90 lm/watt	0.450kg	WHITE	1/20	1

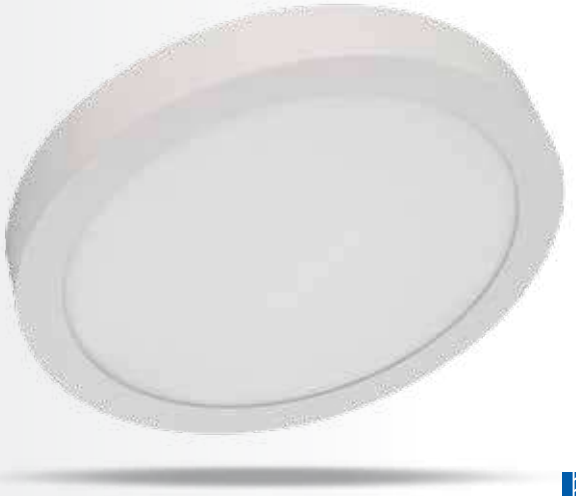


CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68516	5207227117671	30W	6500K	90 lm/watt	0.560kg	WHITE	1/10	1
E.145-68517	5207227117688	30W	4000K	90 lm/watt	0.560kg	WHITE	1/10	1
E.145-68518	5207227117695	30W	3000K	90 lm/watt	0.560kg	WHITE	1/10	1





• PANEL LED SLIM SUPERFICIE
• SURFACE LED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

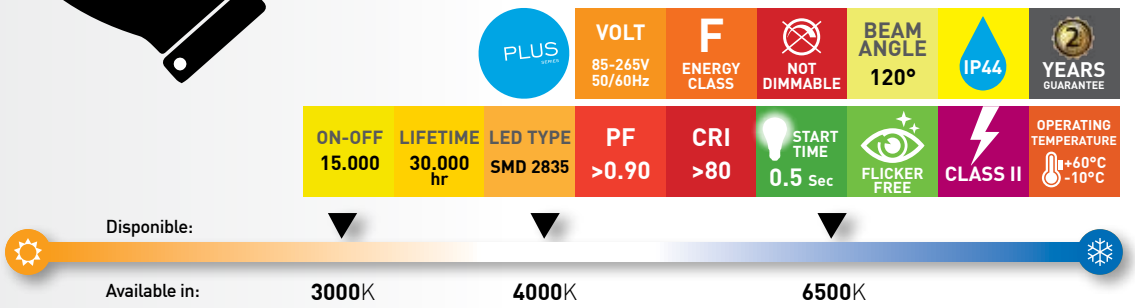




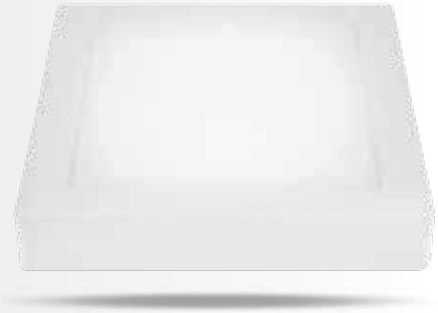


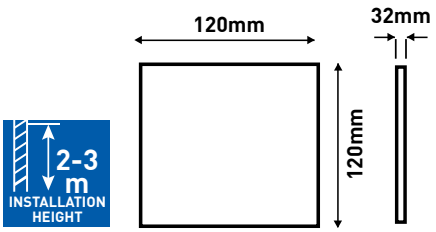



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68520	5207227069581	6W	6500K	90 lm/watt	0.230kg	WHITE	1/20	1
E.145-68521	5207227069604	6W	4000K	90 lm/watt	0.230kg	WHITE	1/20	1
E.145-68522	5207227069628	6W	3000K	90 lm/watt	0.230kg	WHITE	1/20	1

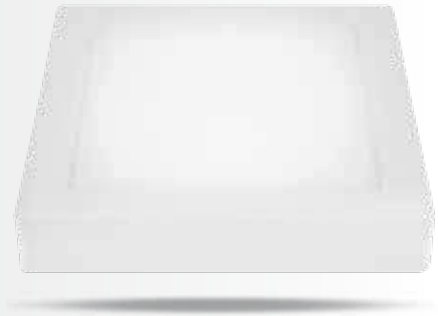

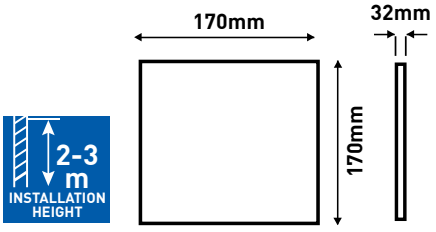




CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68526	5207227069642	12W	6500K	90 lm/watt	0.340kg	WHITE	1/20	1
E.145-68527	5207227069666	12W	4000K	90 lm/watt	0.340kg	WHITE	1/20	1
E.145-68528	5207227069680	12W	3000K	90 lm/watt	0.340kg	WHITE	1/20	1

- PANEL LED SLIM SUPERFICIE
- SURFACE LED SLIM LIGHT FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

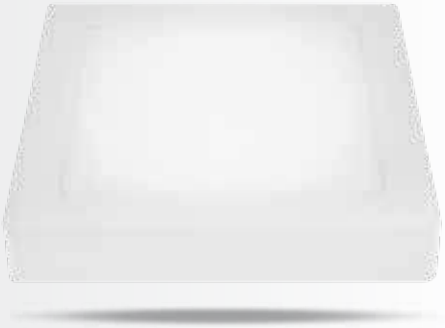






CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68530	5207227142215	20W	6500K	90 lm/watt	0.550kg	WHITE	1/20	1
E.145-68531	5207227124150	20W	4000K	90 lm/watt	0.550kg	WHITE	1/20	1
E.145-68532	5207227124174	20W	3000K	90 lm/watt	0.550kg	WHITE	1/20	1
E.145-68533	5207227124181	24W	6500K	90 lm/watt	0.550kg	WHITE	1/20	1
E.145-68534	5207227124198	24W	4000K	90 lm/watt	0.550kg	WHITE	1/20	1
E.145-68535	5207227124204	24W	3000K	90 lm/watt	0.550kg	WHITE	1/20	1



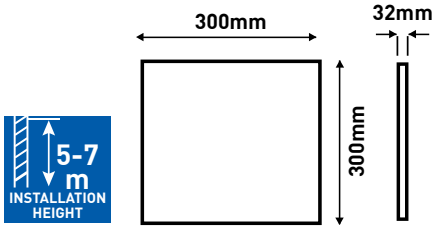



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-68536	5207227117619	30W	6500K	90 lm/watt	0.570kg	WHITE	1/10	1
E.145-68537	5207227117626	30W	4000K	90 lm/watt	0.570kg	WHITE	1/10	1
E.145-68538	5207227117633	30W	3000K	90 lm/watt	0.570kg	WHITE	1/10	1



• PLAFON DE TECHO LED
• CEILING LED LIGHT

MATERIAL DE PRODUCCION: **PLASTICO CON PROTECCION UV**
PRODUCTION MATERIAL: **PLASTIC UV PROOF**

PRO | VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 42V DC | G ENERGY CLASS | NOT DIMMABLE | DETECTION ANGLE 180°-360° | IP66 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 100.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | IK10 | CLASS II | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C

Color Box
PACKING

Disponible:

Available in: **4000**K




MICROWAVE SENSOR

• CON DETECTOR DE MOVIMIENTO Y CONEXION ADICIONAL
• WITH MOTION DETECTOR & ADDITIONAL CONNECTION

• Tiempo de retardo / Delay Time
3 sec - 12 min

• Deteccion de pared / Wall Detection: **max 15m**
• Deteccion de techo / Ceiling Detection: **2-8m**



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55301	5206139080899	16W	4000K	81m/watt	1.300kg	WHITE	1/5	1




MICROWAVE SENSOR

• CON DETECTOR DE MOVIMIENTO Y LUZ DE EMERGENCIA
• WITH MOTION DETECTOR & EMERGENCY LIGHT

• Carga de emergencia 1,2 W CC
Bateria de litio 1500mAh
Tiempo de retardo 3 seg - 12 min


• Emergency Load 1.2 W DC
Battery Lithium 1500mAh
Delay time 3 sec - 12 min



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55302	5206139080905	15W	4000K	75m/watt	1.300kg	WHITE	1/5	1



• CON CONEXION ADICIONAL
• WITH ADDITIONAL CONNECTION



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55307	5207227116308	16W	4000K	81m/watt	1.300kg	WHITE	1/5	1

• Luz de Emergencia
• LED Emergency Lights









Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Almacenes
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Warehouses
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly




• LUZ DE EMERGENCIA LED
• EMERGENCY LIGHTS LED

MATERIAL DE PRODUCCION: **ABS Y PS**
PRODUCTION MATERIAL: **ABS & PS**








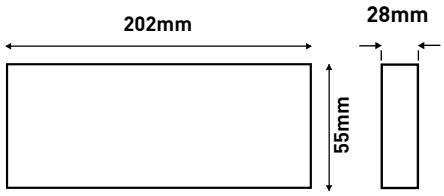

- Lumenes por nivel de funcion: bajo 150 lm/alto 300 lm
- Lumens per Function Level: Low 150 lm/High 300 lm

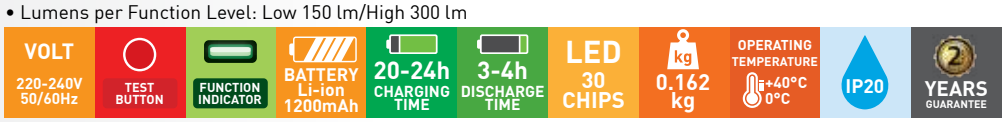



Color Box
PACKING


CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28000	5207227075544	2W	6000K-7500K	**60** lm/watt	ENCHUFE/PLUG	1/40	1

MATERIAL DE PRODUCCION: **ABS Y PS**
PRODUCTION MATERIAL: **ABS & PS**







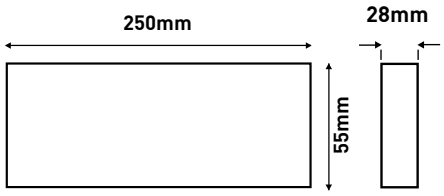

- Lumenes por nivel de funcion: bajo 150 lm/alto 300 lm
- Lumens per Function Level: Low 150 lm/High 300 lm





Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28001	5207227075551	4W	6000K-7500K	**75** lm/watt	ENCHUFE/PLUG	1/40	1


- LUZ DE EMERGENCIA LED
- EMERGENCY LIGHTS LED

MATERIAL DE PRODUCCION: **ABS & PS**
PRODUCTION MATERIAL: **ABS & PS**







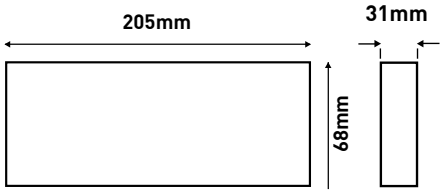

- Lumenes por nivel de funcion: bajo 80 lm/alto 200 lm
- Lumens per Function Level: Low 80 lm/High 200 lm

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 1500mAh | 20-24h CHARGING TIME | 2-3h DISCHARGE TIME | LED 20 CHIPS | 0.240 kg | OPERATING TEMPERATURE +40°C 0°C | IP20 | 2 YEARS GUARANTEE




Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28010	5207227075568	4W	6000K-7500K	50 lm/watt	ENCHUFE/PLUG	1/40	1

MATERIAL DE PRODUCCION: **ABS y PMMA no combustibles**
PRODUCTION MATERIAL: **Non-Combustible ABS & PMMA**





- Prueba automatica de funcion e indicacion de problemas
- Auto-test Function and Trouble Indicator

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 2200mAh | 20-24h CHARGING TIME | 2h DISCHARGE TIME | LED 2 CHIPS | TOTAL LUMEN 300lm | 0.275 kg | OPERATING TEMPERATURE +40°C 0°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker
PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28102	5207227075599	4W	6000K-7500K	75 lm/watt	CLEMA/TERMINAL BLOCK	1/20	1



• LUZ DE EMERGENCIA LED
• EMERGENCY LIGHTS LED
FUNCION CONTINUA / CONTINUOUS FUNCTION


MATERIAL DE PRODUCCION: **ABS y PMMA no combustibles**
PRODUCTION MATERIAL: **Non-Combustible ABS & PC**

2 in 1

1. LUMINARIA LED / LUMINAIRE LED
2. LUZ DE EMERGENCIA LED / EMERGENCY LIGHT LED

SET x3 STICKERS



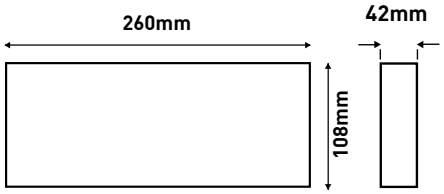

- Instalacion de superficie y empotrada
- Surface & Recessed Installation

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 2200mAh | 20-24h CHARGING TIME | 3h DISCHARGE TIME | LED 20 CHIPS | TOTAL LUMEN 240lm | 0.450 kg | OPERATING TEMPERATURE +40°C 0°C | IP43 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28101	5207227075582	3W	6000K-7500K	80 lm/watt	CLEMA/TERMINAL BLOCK	1/20	1


MATERIAL DE PRODUCCION: **ABS y PMMA no combustibles**
PRODUCTION MATERIAL: **Non-Combustible ABS & PC**

2 in 1

1. LUMINARIA LED / LUMINAIRE LED
2. LUZ DE EMERGENCIA LED / EMERGENCY LIGHT LED

SET x3 STICKERS



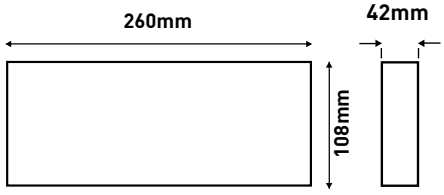

- Instalacion de superficie y empotrada
- Surface & Recessed Installation

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 1200mAh | 20-24h CHARGING TIME | 3h DISCHARGE TIME | LED 10 CHIPS | TOTAL LUMEN 150lm | 0.420 kg | OPERATING TEMPERATURE +40°C 0°C | IP43 | 2 YEARS GUARANTEE





White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28100	5207227075575	2W	6000K-7500K	75 lm/watt	CLEMA/TERMINAL BLOCK	1/20	1

- LUZ DE EMERGENCIA LED
- EMERGENCY LIGHTS LED

MATERIAL DE PRODUCCION: **PC**
PRODUCTION MATERIAL: **PC**

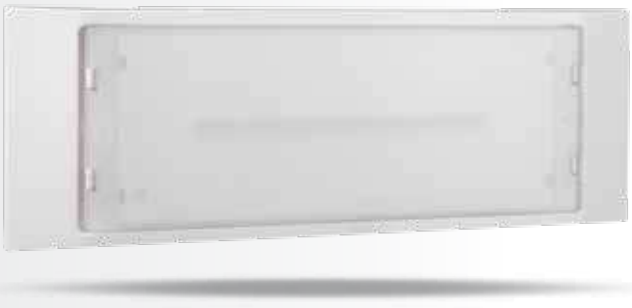

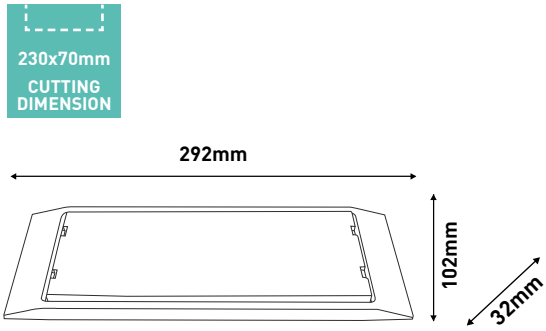

- Instalacion de superficie y empotrada
- Surface & Recessed Installation

VOLT 220-240V 50/60Hz | BATTERY Li-ion 1800mAh | 24h CHARGING TIME | 3h DISCHARGE TIME | LED 30 CHIPS | 0.450 kg | OPERATING TEMPERATURE +40°C 0°C | IP65 | 2 YEARS GUARANTEE



Color Box
PACKING


CODE	BARCODE	WATT	KELVIN	CONNECTION	PACKING	MOQ
E.145-28114	5207227122927	4W	4000K	CLEMA/TERMINAL BLOCK	1/20	1

MATERIAL DE PRODUCCION: **ABS y PMMA no combustibles**
PRODUCTION MATERIAL: **Non-Combustible ABS & PC**

3 etiquetas adhesivas incluidas
3 Sign Stickers included

SET x3 STICKERS



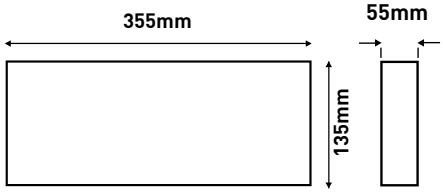

- Instalacion de superficie y empotrada
- Surface & Recessed Installation

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 2200mAh | 20-24h CHARGING TIME | 1.5h DISCHARGE TIME | LED 40 CHIPS | TOTAL LUMEN 300lm | 0.650 kg | OPERATING TEMPERATURE +40°C 0°C | IP65 | 2 YEARS GUARANTEE



White Box with Sticker
PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28110	5207227075605	4W	6000K-7500K	75 lm/watt	CLEMA/TERMINAL BLOCK	1/10	1



• LUZ DE EMERGENCIA LED
• EMERGENCY LIGHTS LED


MATERIAL DE PRODUCCION: **PC**
PRODUCTION MATERIAL: **PC**

Base Empotrable
Recessed Base

310x140x35mm





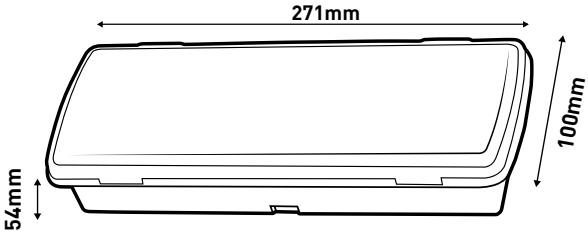

• Instalacion de superficie y empotrada
• Surface & Recessed Installation






White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	CONNECTION	WEIGHT	PACKING	MOQ
E.145-28113	5207227122910	4W	4000K	CLEMA/TERMINAL BLOCK	0.550 Kg	1/20	1
E.145-28900	5207227124235	BASE EMPOTRABLE / RECESSED BASE			0.180 Kg	1/20	1

MATERIAL DE PRODUCCION: **ABS y PMMA no combustibles**
PRODUCTION MATERIAL: **Non-Combustible ABS & PMMA**







• Χωνευτή Τοποθέτηση
• Recessed Installation





White Box with Sticker PACKING


CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28510	5207227075636	4W	6000K-7500K	**75** lm/watt	CLEMA/TERMINAL BLOCK	1/20	1

- LUZ DE EMERGENCIA LED
- EMERGENCY LIGHTS LED

MATERIAL DE PRODUCCION: **ALUMINIO Y PMMA**
PRODUCTION MATERIAL: **ALUMINIUM & PMMA**

2 juegos de 4 pegatinas de señal incluidas
2 Set of 4 pcs Sign Stickers included



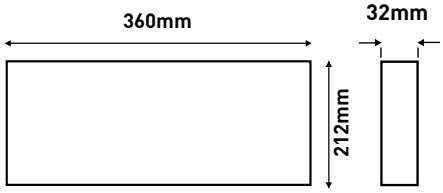



White Box with Sticker PACKING


- Instalacion suspendida y de superficie
- Suspended & Surface Installation



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28400	5207227075612	2W	6000K-7500K	15 lm/watt	CABLE/WIRE	1/20	1

MATERIAL DE PRODUCCION: **ABS & PMMA**
PRODUCTION MATERIAL: **ABS & PMMA**



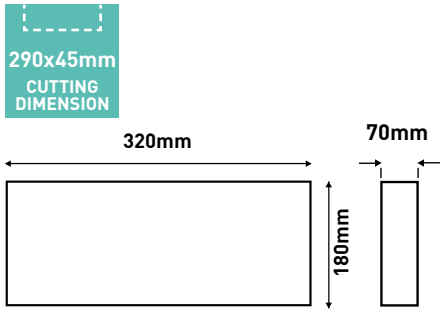



White Box with Sticker PACKING

- Empotrado
- Recessed Installation



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28500	5207227075629	2W	6000K-7500K	30 lm/watt	CABLE/WIRE	1/10	1

• LUZ DE EMERGENCIA LED
• EMERGENCY LIGHTS LED


MATERIAL DE PRODUCCION: **ABS & PC**
PRODUCTION MATERIAL: **ABS & PC**



LED
2x20
CHIPS





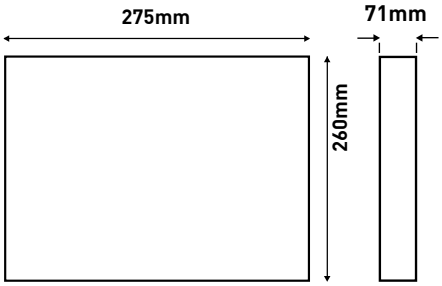



White Box with Sticker PACKING

• Lumenes por nivel de funcion: bajo 150 lm/alto 300 lm
• Lumens per Function Level: Low 150 lm/High 300 lm

VOLT 220-240V 50/60Hz | TEST BUTTON | FUNCTION INDICATOR | BATTERY Li-ion 2200mAh | 20-24h CHARGING TIME | 2-3h DISCHARGE TIME / HIGH | 5-6h DISCHARGE TIME / LOW | 0.750 kg | OPERATING TEMPERATURE +40°C 0°C | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	CONNECTION	PACKING	MOQ
E.145-28600	5207227075643	4W	6000K-7500K	75 lm/watt	ENCHUFE/PLUG	1/5	1

• CON DETECTOR DE MOVIMIENTO Y LUZ DE EMERGENCIA
• WITH MOTION DETECTOR & EMERGENCY LIGHT

MATERIAL DE PRODUCCION: **PLASTICO CON PROTECCION UV**
PRODUCTION MATERIAL: **PLASTIC UV PROOF**

Se expande hasta 10 piezas.
Expands up to 10 pcs




MICROWAVE SENSOR

• Deteccion de pared / Wall Detection: **max 15m**
• Deteccion de techo / Ceiling Detection: **2-8m**

DIMMABLE

• Carga de emergencia 1,2 W CC
Bateria de litio 1500mAh
Tiempo de retardo 3 seg - 12 min

• Emergency Load 1.2 W DC
Battery Lithium 1500mAh
Delay time 3 sec - 12 min



PRO | VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 42V DC | G ENERGY CLASS | DETECTION ANGLE 180° -360° | IP66 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 100.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | IK10 | CLASS II | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C




Color Box PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55302	5206139080905	16W	4000K	75m/watt	1.300kg	WHITE	1/5	1

- Tiras de LED / Drivers / Controladores
- LED Tapes / Drivers / Controllers





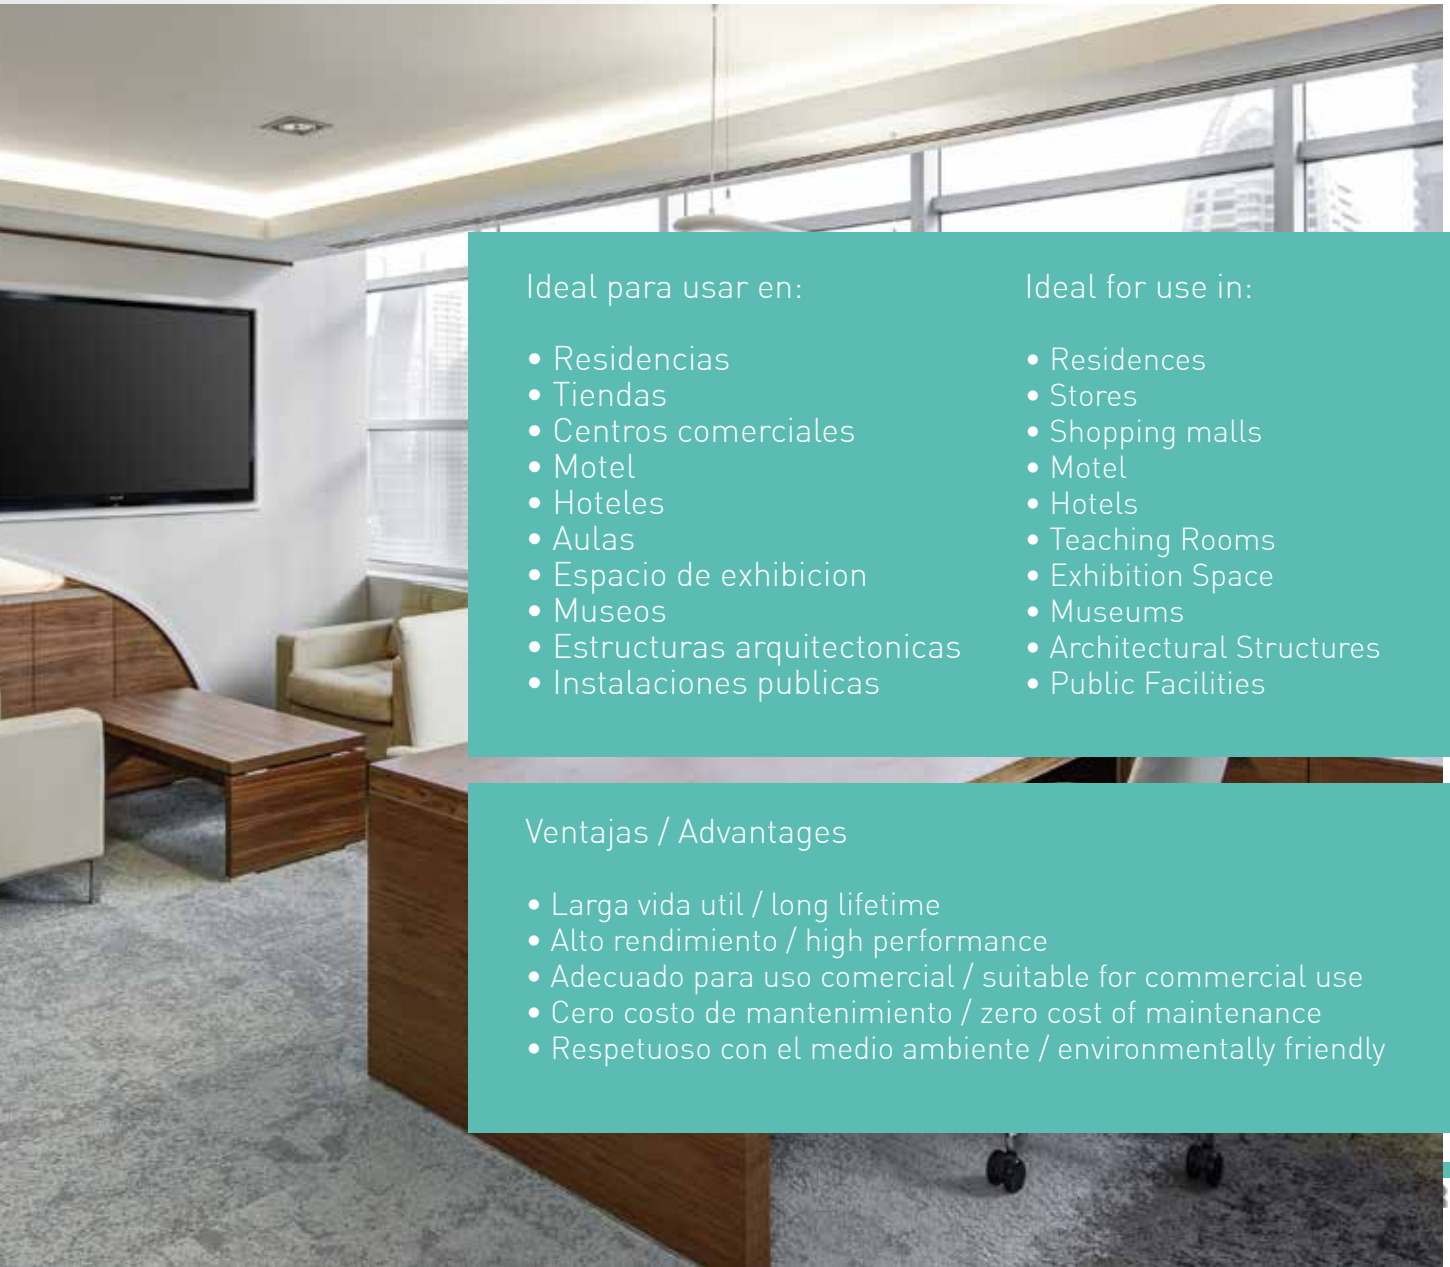

Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

MOVEMENT SENSOR

TIRA DE LED CON SENSOR DE MOVIMIENTO
LED TAPE WITH MOVEMENT SENSOR

E.145-70020 — NOT DIMMABLE

E.145-70021 — DIMMABLE



TAPE CUTTING 100mm

TAPE TOTAL LENGTH 2 x 1.2m

2 PCS




Double **Blister** PACKING

PRO

VOLT 12V | AMPERAGE 500 mA | ENERGY CLASS E | BEAM ANGLE 120° | LIFETIME 30.000 hr | LED TYPE SMD 2835 | LED 30 CHIPS/m | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP65 | 2 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70020	5207227098710	6W	3000K	8	0.325 kg	1/20	1
E.145-70021	5207227098727	6W	3000K	8	0.315 kg	1/20	1

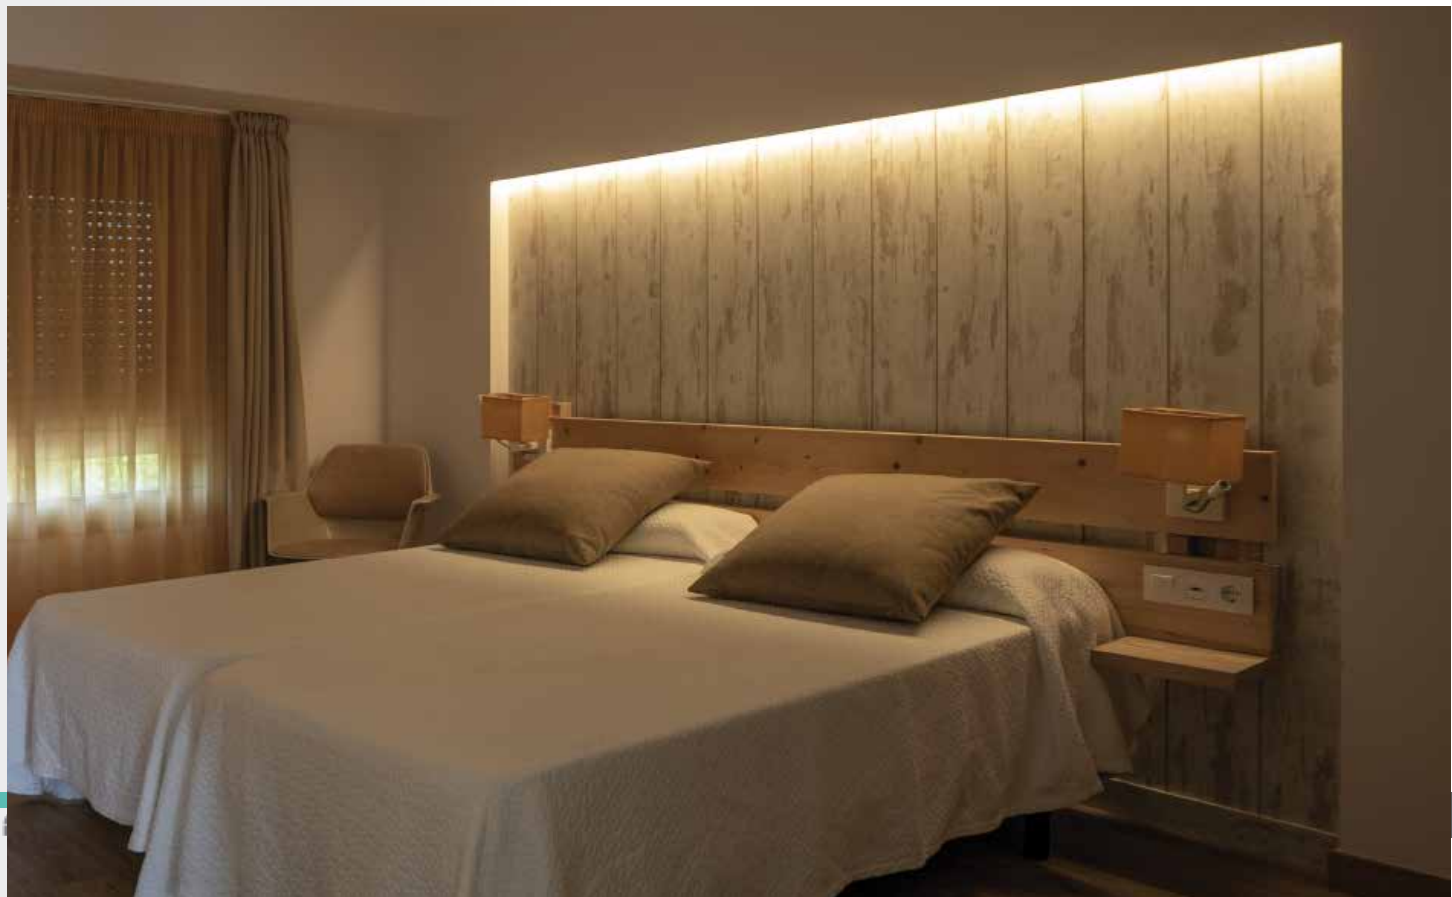

• TIRAS DE LED
• LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

TIRA DE LED CON SENSOR DE MOVIMIENTO
LED TAPE WITH MOVEMENT SENSOR

MOVEMENT SENSOR

RGB

DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 2 x 1.5m



2 PCS



Double Blister PACKING

PRO

VOLT	AMPERAGE	ENERGY CLASS	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE			
12V	1500 mA	E	120°	30.000 hr	SMD 5050	30 CHIPS/m	0.5 Sec	+40°C -20°C	IP65	2 YEARS GUARANTEE	

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70022	5207227098734	9W	RGB	10	0.380 kg	1/20	1



- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

TARIFA PVP

MOVEMENT SENSOR

TIRA DE LED CON SENSOR DE MOVIMIENTO
LED TAPE WITH MOVEMENT SENSOR



USB
ΣΥΝΔΕΣΗ
CONNECTION

NOT DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 1.0 m

PRO

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE		
3.7 V	649 mA	120°	30.000 hr	SMD 2835	30 CHIPS/m	0.5 Sec	+40°C -20°C	IP65	2 YEARS GUARANTEE



Double **Blister** PACKING

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70023	5207227098741	2.4W	3000K	8	0.145 kg	1/40	1



- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

MOVEMENT SENSOR

DIMMABLE

TIRA DE LED CON SENSOR DE MOVIMIENTO
LED TAPE WITH MOVEMENT SENSOR



TAPE CUTTING 100mm

TAPE TOTAL LENGTH 1.0 m



BATTERY 4xAAA

Funcionamiento con pilas
Battery function



Double **Blister** PACKING

PRO

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE			
6 V	400 mA	120°	30,000 hr	SMD 2835	30 CHIPS/m	0.5 Sec	+40°C -20°C	IP65	2 YEARS GUARANTEE	

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70024	5207227098758	2.4W	3000K	8	0.110 kg	1/40	1



- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

TARIFA PVP

DIMMABLE **RGB**



USB
ΣΥΝΔΕΣΗ
CONNECTION

TAPE CUTTING 16.6mm

TAPE TOTAL LENGTH 2 x 0.5 m



2 PCS

Color Box
PACKING

PRO

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE		
5 V	1440 mA	120°	30.000 hr	SMD 5050	30 CHIPS/m	0.5 Sec	+40°C -20°C	IP65	2 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70025	5207227098765	7.2W	RGB	10	0.160 kg	1/40	1



- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**





DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 3.0 m

TAPE EXPANSION 10 m



Double **Blister** PACKING

VALUE

VOLT	AMPERAGE	ENERGY CLASS	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE			
12 V	660 mA	G	120°	17.000 hr	SMD 2835	60 CHIPS/m	0.5 Sec	+40°C	-20°C	IP20	1 YEAR GUARANTEE

CODE	BARCODE	WATT	KELVIN	LUMENS	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.147-70010	5206139077172	6W	4000K	480lm	8	0.260 kg	1/32	1

- PIXEL KIT RGB + DRIVER + Wifi CONTROLADOR CON MUSICA
- PIXEL KIT RGB + DRIVER + Wifi CONTROLLER WITH MUSIC

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

NEW PRODUCT





Pixel RGB

DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m



Color Box PACKING

PLUS

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE			
12 V	1500 mA	120°	25.000 hr	SMD 5050	30 CHIPS/m	0.5 Sec	+40°C	-20°C	IP20	2 YEARS GUARANTEE

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70045	5207227140433	18W	RGB	10	0.280 kg	1/40	1

- TIRAS DE LED
- LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

RGB

TAPE CUTTING 100mm

TAPE TOTAL WIDTH 10 mm



VOLT	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE			
12 V	120°	17.000 hr	SMD 5050	30 CHIPS/m	0.5 Sec	+40°C -20°C	IP20	1 YEAR GUARANTEE	

Double **Blister** PACKING

CODE	BARCODE	WATT	AMPERAGE	LENGTH	WEIGHT	PACKING	MOQ
E.147-70011	5206139077219	10W	660mA	3m	0.280Kg	1/36	1

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

NEW PRODUCT





RGB

DIMMABLE

TAPE CUTTING 50mm

PLUS

VOLT	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE		
12 V	120°	25.000 hr	SMD 5050	60 CHIPS/m	0.5 Sec	+40°C -20°C	2 YEARS GUARANTEE	

Color Box PACKING

CODE	BARCODE	WATT	AMPERAGE	IP	LENGTH	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70041	5207227105784	14,4W	3A	IP44	5m	10	0.450 kg	1/20	1
E.145-70042	5207227140402	14,4W	5A	IP20	2x5m	10	0.530 kg	1/30	1

- TIRAS DE LED + DRIVER + Wifi CONTROLLER CON MUSICA
- LED TAPES + DRIVER + Wifi CONTROLLER WITH MUSIC

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



NEW PRODUCT



RGB

DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m

PLUS

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE		
12 V	1A	120°	25,000 hr	SMD 5050	18 CHIPS/m	0.5 Sec	+40°C -20°C	IP20	2 YEARS GUARANTEE

Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70043	5207227140419	12W	RGB	10	0.280 kg	1/40	1

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

NEW PRODUCT





RGB

DIMMABLE

TAPE CUTTING 50mm

x2

TAPE TOTAL LENGTH 5.0 m

PLUS

VOLT	AMPERAGE	BEAM ANGLE	LIFETIME	LED TYPE	LED	START TIME	OPERATING TEMPERATURE		
12 V	1A	120°	25,000 hr	SMD 5050	18 CHIPS/m	0.5 Sec	+40°C -20°C	IP20	2 YEARS GUARANTEE

Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70044	5207227140426	24W	RGB	10	0.320 kg	1/40	1




• TIRAS DE LED / LED TAPES

• ESQUINA / CORNER 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



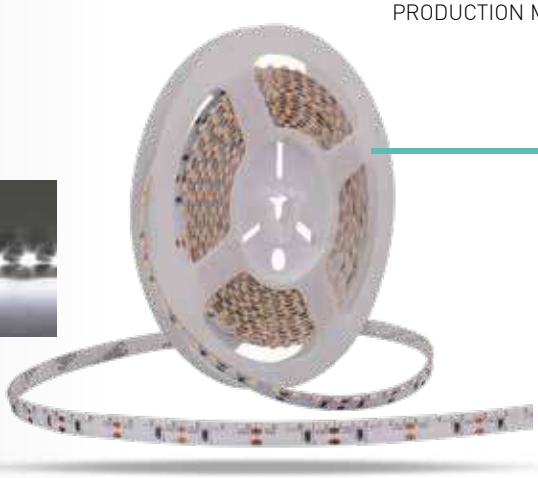

DIMMABLE

TAPE CUTTING 25mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 10 m

PRO | VOLT 12 V | AMPERAGE 916 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 34.000 hr | LED TYPE SMD 3014 | LED 120 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.147-70210	5206139029058	12W	6500K	95 lm/watt	8	0.076Kg	1/25/100	5
E.147-70211	5206139029171	12W	4000K	93 lm/watt	8	0.076Kg	1/25/100	5
E.147-70212	5207227016660	12W	3000K	90 lm/watt	8	0.076Kg	1/25/100	5

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 10 m

VALUE | VOLT 12 V | AMPERAGE 400 mA | G ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 17.000 hr | LED TYPE SMD 3528 | LED 60 CHIPS/m | CRI >70 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



SilverBag PACKING

Disponible:

Available in: **3000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70100	5207227111648	4.8W	6500K	70 lm/watt	8	0.090Kg	1/100	5
E.145-70101	5207227111679	4.8W	3000K	70 lm/watt	8	0.090Kg	1/100	5

- TIRAS DE LED / LED TAPES
- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE · TAPE CUTTING 100mm · TAPE TOTAL LENGTH 5.0 m · TAPE EXPANSION 10 m

VALUE | VOLT 12 V | AMPERAGE 480 mA | G ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 17.000 hr | LED TYPE SMD 5050 | LED 30 CHIPS/m | CRI >70* | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70110*	5207227066436	7,2W	6500K	65 lm/watt	10	0.120 kg	1/25/100	5
E.145-70111*	5207227066467	7,2W	4000K	65 lm/watt	10	0.120 kg	1/25/100	5
E.145-70112*	5207227066498	7,2W	3000K	65 lm/watt	10	0.120 kg	1/25/100	5
E.145-70113	5207227067303	7,2W	RGB	-	10	0.120 kg	1/25/100	5

- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE · TAPE CUTTING 100mm · TAPE TOTAL LENGTH 5.0 m · TAPE EXPANSION 10 m

PLUS | VOLT 12 V | AMPERAGE 600 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 5050 | LED 30 CHIPS/m | CRI >80* | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K


CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70120*	5207227066528	7,2W	6500K	95 lm/watt	10	0.130 kg	1/25/100	5
E.145-70121*	5207227066559	7,2W	4000K	93 lm/watt	10	0.130 kg	1/25/100	5
E.145-70122*	5207227066580	7,2W	3000K	90 lm/watt	10	0.130 kg	1/25/100	5
E.145-70123	5207227066610	7,2W	RGB	-	10	0.130 kg	1/25/100	5



• TIRAS DE LED / LED TAPES

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

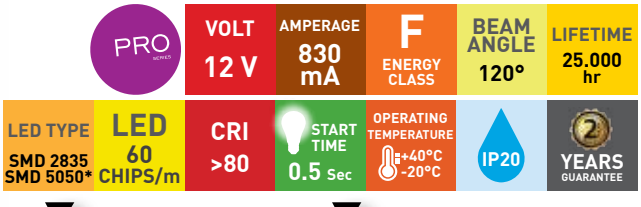
















CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70130	5207227079313	10W	6500K	105 lm/watt	8	0.080Kg	1/25/100	5
E.145-70131	5207227079320	10W	4000K	103 lm/watt	8	0.080Kg	1/25/100	5
E.145-70132	5207227079337	10W	3000K	100 lm/watt	8	0.080Kg	1/25/100	5
E.145-70133	5207227121173	10W	RED	-	8	0.080Kg	1/25/100	5
E.145-70134	5207227121180	10W	GREEN	-	8	0.080Kg	1/25/100	5
E.145-70135	5207227121197	10W	BLUE	-	8	0.080Kg	1/25/100	5
E.145-70136	5207227121203	10W	YELLOW	-	8	0.080Kg	1/25/100	5
E.145-70137*	5207227079146	10W	RGB*	-	10	0.150Kg	1/25/100	5

• 30m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**







CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70140	5207227079672	10W	6500K	105 lm/watt	8	0.550Kg	1/22	30
E.145-70141	5207227079696	10W	4000K	103 lm/watt	8	0.550Kg	1/22	30
E.145-70142	5207227079719	10W	3000K	100 lm/watt	8	0.550Kg	1/22	30
E.145-70143*	5207227079733	10W	RGB*	-	10	0.675Kg	1/20	30

- TIRAS DE LED / LED TAPES
- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE
TAPE CUTTING 100mm
TAPE TOTAL LENGTH 5.0 m
TAPE EXPANSION 10 m

VALUE | VOLT 12 V | AMPERAGE 1050 mA | G ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 17.000 hr | LED TYPE SMD 5050 | LED 60 CHIPS/m | CRI >70 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE

SilverBag PACKING

Disponible:

Available in: 3000K 4000K 6500K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70150	5207227067372	14,4W	6500K	65 lm/watt	10	0.140 kg	1/25/100	5
E.145-70151	5207227067389	14,4W	4000K	65 lm/watt	10	0.140 kg	1/25/100	5
E.145-70152	5207227067396	14,4W	3000K	65 lm/watt	10	0.140 kg	1/25/100	5
E.145-70157	5207227067402	14,4W	RGB	-	10	0.140 kg	1/25/100	5

- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE
TAPE CUTTING 100mm
TAPE TOTAL LENGTH 5.0 m
TAPE EXPANSION 10 m

PLUS | VOLT 12 V | AMPERAGE 1200 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 5050 | LED 60 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: 3000K 4000K 6500K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70160	5207227079207	14,4W	6500K	95 lm/watt	10	0.150 kg	1/25/100	5
E.145-70161	5207227079214	14,4W	4000K	93 lm/watt	10	0.150 kg	1/25/100	5
E.145-70162	5207227079191	14,4W	3000K	90 lm/watt	10	0.150 kg	1/25/100	5
E.145-70167	5207227107627	14,4W	RGB	-	10	0.150 kg	1/100	5



• TIRAS DE LED / LED TAPES

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

VALUE

VOLT 24 V | AMPERAGE 300 mA | G ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 17.000 hr | LED TYPE SMD 5050 | LED 30 CHIPS/m | CRI >70 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70210	5207227069734	7,2W	6500K	65 lm/watt	10	0.120 kg	1/100	5
E.145-70211	5207227069741	7,2W	4000K	65 lm/watt	10	0.120 kg	1/100	5
E.145-70212	5207227069758	7,2W	3000K	65 lm/watt	10	0.120 kg	1/100	5
E.145-70217	5207227069765	7,2W	RGB	-	10	0.120 kg	1/100	5

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

PLUS

VOLT 24 V | AMPERAGE 500 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 5050 | LED 30 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70220	5207227069772	7,2W	6500K	95 lm/watt	10	0.130 kg	1/25/100	5
E.145-70221	5207227069789	7,2W	4000K	93 lm/watt	10	0.130 kg	1/25/100	5
E.145-70222	5207227069796	7,2W	3000K	90 lm/watt	10	0.130 kg	1/25/100	5
E.145-70227	5207227069802	7,2W	RGB	-	10	0.130 kg	1/100	5

- TIRAS DE LED / LED TAPES
- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

PRO | VOLT 24 V | AMPERAGE 600 mA | E ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 2835 | LED 120 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70230	5207227067037	9,6W	6500K	125 lm/watt	8	0.105 kg	1/100	5
E.145-70231	5207227067068	9,6W	4000K	123 lm/watt	8	0.105 kg	1/100	5
E.145-70232	5207227067099	9,6W	3000K	120 lm/watt	8	0.105 kg	1/100	5
E.145-70233	5207227159671	9,6W	2700K	120 lm/watt	8	0.105 kg	1/100	5

• FLEXIBLE • 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m



Doblado 360° / 360° Bending
Ideal para construciones de letreros
Ideal for sign constructions



PRO | VOLT 24 V | AMPERAGE 410 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 2835 | LED 60 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70235	5207227066641	10W	6500K	105 lm/watt	8	0.080 kg	1/5/10	5
E.145-70236	5207227066672	10W	4000K	103 lm/watt	8	0.080 kg	1/5/10	5
E.145-70237	5207227066702	10W	3000K	100 lm/watt	8	0.080 kg	1/5/10	5




★BEST SELLER

• TIRAS DE LED / LED TAPES

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

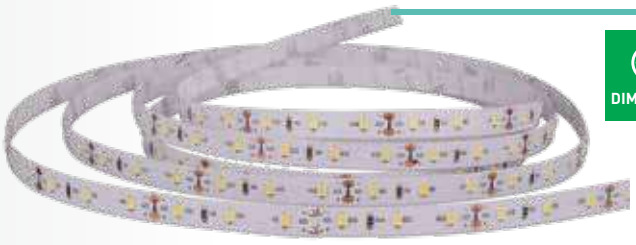

DIMMABLE

TAPE CUTTING 50mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

PRO | VOLT 24 V | AMPERAGE 410 1200* mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 2835 SMD 5050* | LED 60 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70240	5207227085628	10W	6500K	105 lm/watt	8	0.080 kg	1/25/100	5
E.145-70241	5207227085659	10W	4000K	103 lm/watt	8	0.080 kg	1/25/100	5
E.145-70242	5207227085680	10W	3000K	100 lm/watt	8	0.080 kg	1/25/100	5
E.145-70248	5207227159718	10W	2700K	100 lm/watt	8	0.080 kg	1/25/100	5
E.145-70243*	5207227085710	10W	RGB	-	10	0.150 kg	1/25/100	5
E.145-70244*	5207227067150	10W	RGBW+4000K	-	12	0.150 kg	1/100	5
E.145-70245*	5207227085741	10W	RGBWW+3000K	-	12	0.150 kg	1/25/50	5
E.145-70246*	5207227123450	10W	RGBCCT	-	12	0.150 kg	1/100	5

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

★BEST SELLER



DIMMABLE

TAPE CUTTING 25mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

PRO | VOLT 24 V | AMPERAGE 500 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 2835 | LED 120 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70270	5207227066856	12W	6500K	95 lm/watt	8	0.100 kg	1/25/100	5
E.145-70271	5207227066887	12W	4000K	93 lm/watt	8	0.100 kg	1/25/100	5
E.145-70272	5207227066917	12W	3000K	90 lm/watt	8	0.100 kg	1/25/100	5
E.145-70273	5207227159756	12W	2700K	90 lm/watt	8	0.100 kg	1/25/100	5

- TIRAS DE LED / LED TAPES
- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 10 m

VALUE

VOLT	AMPERAGE	ENERGY CLASS	BEAM ANGLE	LIFETIME	LED TYPE	LED	CRI	START TIME	OPERATING TEMPERATURE			
24 V	600 mA	G	120°	17.000 hr	SMD 5050	60 CHIPS/m	>70	0.5 Sec	+40°C -20°C	IP20	1 YEAR GUARANTEE	

Disponible:

Available in: **3000**K **4000**K **6500**K

SilverBag PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70250	5207227066733	14,4W	6500K	65 lm/watt	10	0.145 kg	1/25/100	5
E.145-70251	5207227066764	14,4W	4000K	65 lm/watt	10	0.145 kg	1/25/100	5
E.145-70252	5207227066795	14,4W	3000K	65 lm/watt	10	0.145 kg	1/25/100	5
E.145-70253	5207227066825	14,4W	RGB	-	10	0.145 kg	1/25/100	5

- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

★BEST SELLER



DIMMABLE

TAPE CUTTING 100mm

TAPE TOTAL LENGTH 5.0 m

TAPE EXPANSION 20 m

PRO

VOLT	AMPERAGE	ENERGY CLASS	BEAM ANGLE	LIFETIME	LED TYPE	LED	CRI	START TIME	OPERATING TEMPERATURE			
24 V	1200 mA	F	120°	25.000 hr	SMD 5050	60 CHIPS/m	>80	0.5 Sec	+40°C -20°C	IP20	2 YEARS GUARANTEE	

Disponible:

Available in: **3000**K **4000**K **6500**K

SilverBag PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70260	5207227079238	14,4W	6500K	95 lm/watt	10	0.150 kg	1/100	5
E.145-70261	5207227079245	14,4W	4000K	93 lm/watt	10	0.150 kg	1/100	5
E.145-70262	5207227079634	14,4W	3000K	90 lm/watt	10	0.150 kg	1/100	5
E.145-70268	5207227079634	14,4W	2700K	90 lm/watt	10	0.150 kg	1/100	5
E.145-70263	5207227079641	14,4W	RGB	-	10	0.150 kg	1/100	5



• TIRAS DE LED / LED TAPES

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE
TAPE CUTTING 12.5mm
TAPE TOTAL LENGTH 5.0 m
TAPE EXPANSION 5 m

PRO | VOLT 24 V | AMPERAGE 750 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25,000 hr | LED TYPE SMD 2835 | LED 240 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE


SilverBag PACKING

Disponible:
Available in: 3000K 4000K 6500K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70275	5207227101113	18W	6500K	95 lm/watt	10	0.170 kg	1/25/100	5
E.145-70276	5207227101144	18W	4000K	90 lm/watt	10	0.170 kg	1/25/100	5
E.145-70277	5207227101175	18W	3000K	85 lm/watt	10	0.170 kg	1/25/100	5
E.145-70278	5207227159817	18W	2700K	85 lm/watt	10	0.170 kg	1/25/100	5

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**



DIMMABLE
TAPE CUTTING 14.3mm
TAPE TOTAL LENGTH 5.0 m
TAPE EXPANSION 10 m

PRO | VOLT 24 V | AMPERAGE 1000 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 30,000 hr | LED TYPE SMD 2110 | LED 700 CHIPS/m | CRI >90 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



SilverBag PACKING

Disponible:
Available in: 3000K 4000K 6500K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70280	5207227066948	24W	6500K	100 lm/watt	12	0.160 kg	1/60	5
E.145-70281	5207227066979	24W	4000K	95 lm/watt	12	0.160 kg	1/60	5
E.145-70282	5207227067006	24W	3000K	90 lm/watt	12	0.160 kg	1/60	5

- TIRAS DE LED / LED TAPES
- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

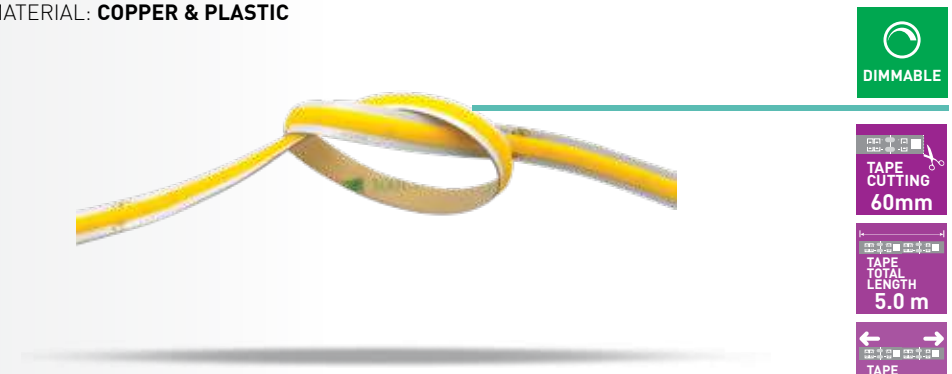

PRO | VOLT 24 V | AMPERAGE 416 mA | ENERGY CLASS E | BEAM ANGLE 120° | LIFETIME 35.000 hr | LED TYPE COB | LED 512 CHIPS/m | CRI >90 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP54 | 2 YEARS GUARANTEE




Disponible:
Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70053	5207227119934	10W	6500K	125 lm/watt	8	0.100 kg	1/25/100	5
E.145-70054	5207227119941	10W	4000K	122 lm/watt	8	0.100 kg	1/25/100	5
E.145-70055	5207227119958	10W	3000K	120 lm/watt	8	0.100 kg	1/25/100	5
E.145-70056	5207227159848	10W	2700K	120 lm/watt	8	0.100 kg	1/25/100	5

- **5m**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

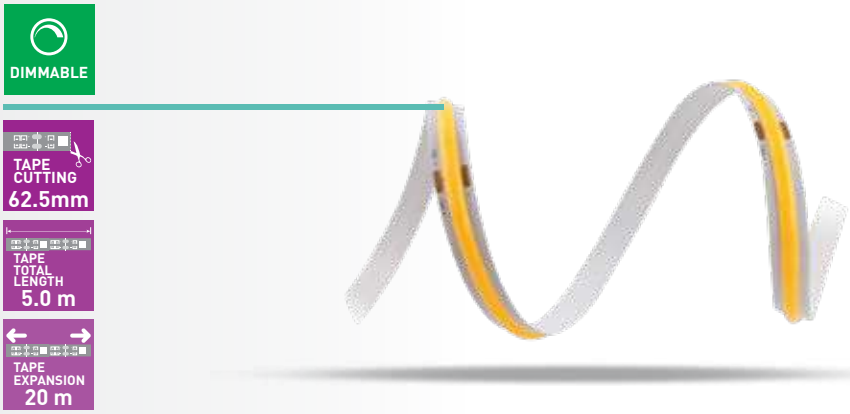

PRO | VOLT 24 V | AMPERAGE 500 mA | ENERGY CLASS E | BEAM ANGLE 120° | LIFETIME 35.000 hr | LED TYPE COB | LED 512 CHIPS/m | CRI >90 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | IP54 | 2 YEARS GUARANTEE



Disponible:
Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70050	5207227068621	12W	6500K	125 lm/watt	8	0.100 kg	1/25/50	5
E.145-70051	5207227068645	12W	4000K	122 lm/watt	8	0.100 kg	1/25/50	5
E.145-70052	5207227068669	12W	3000K	120 lm/watt	8	0.100 kg	1/25/50	5



• TIRAS DE LED / LED TAPES
• 5m • WATERPROOF


MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**









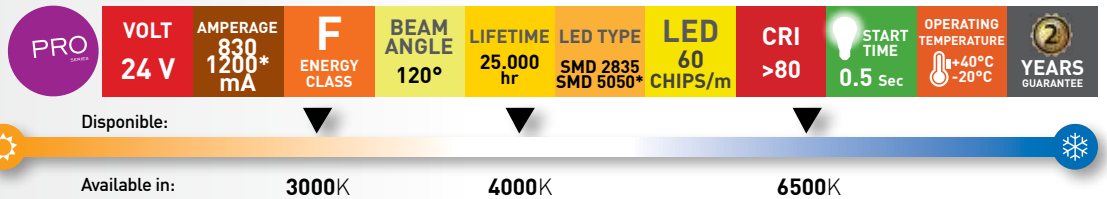



CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70310	5207227079269	10W	6500K	105 lm/watt	8	0.180 kg	1/50	5
E.145-70311	5207227123467	10W	4000K	103 lm/watt	8	0.180 kg	1/50	5
E.145-70312	5207227079276	10W	3000K	100 lm/watt	8	0.180 kg	1/50	5
E.145-70313*	5207227123474	10W	RGB*	-	8	0.195 kg	1/50	5

• 5m • WATERPROOF


MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**









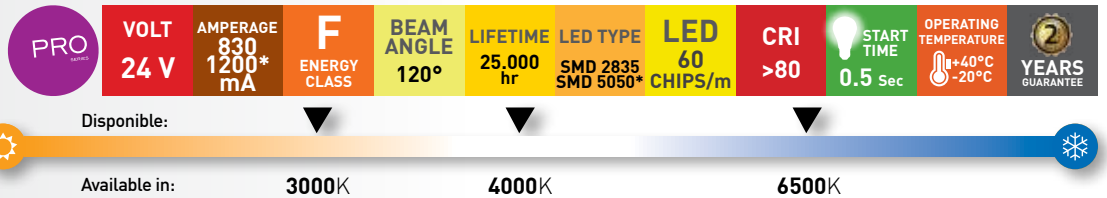




CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70350	5207227079283	10W	6500K	105 lm/watt	8	0.180 kg	1/50	5
E.145-70351	5207227079290	10W	4000K	103 lm/watt	8	0.180 kg	1/50	5
E.145-70352	5207227079306	10W	3000K	100 lm/watt	8	0.180 kg	1/50	5
E.145-70358	5207227159886	10W	2700K	100 lm/watt	8	0.180 kg	1/50	5
E.145-70353*	5207227079368	10W	RGB*	-	10	0.195 kg	1/50	5

- TIRAS DE LED / LED TAPES
- **5m •WATERPROOF**

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

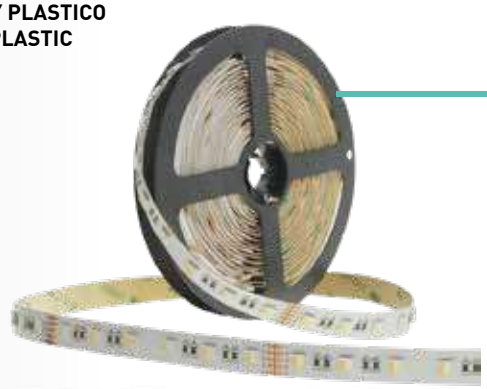

PRO | VOLT 24 V | AMPERAGE 830 1200* mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 2835 SMD 5050* | LED 60 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | 2 YEARS GUARANTEE

SilverBag PACKING


Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70410	5207227079399	10W	6500K	105 lm/watt	11	0.240 kg	1/50	5
E.145-70411	5207227079580	10W	4000K	103 lm/watt	11	0.240 kg	1/50	5
E.145-70412	5207227079610	10W	3000K	100 lm/watt	11	0.240 kg	1/50	5
E.145-70418	5207227159923	10W	2700K	100 lm/watt	11	0.240 kg	1/50	5
E.145-70413*	5207227084669	10W	RGB*	-	11	0.250 kg	1/20/40	5
E.145-70414*	5207227084690	10W	RGBW*	-	11	0.250 kg	1/20/160	5
E.145-70415*	5207227123481	10W	RGBWW*	-	11	0.250 kg	1/50	5

• 5m • WATERPROOF

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

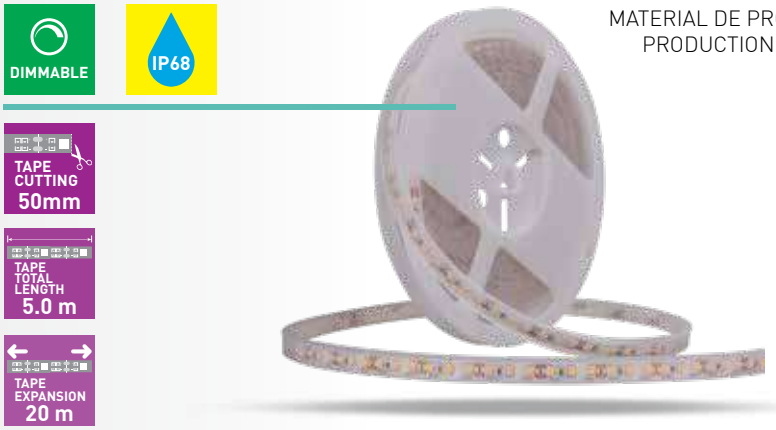

PRO | VOLT 24 V | AMPERAGE 750 mA | F ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 34.000 hr | LED TYPE SMD 2835 | LED 120 CHIPS/m | CRI >80 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | 2 YEARS GUARANTEE

SilverBag PACKING

Disponible:


Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70430	5207227067181	20W	6500K	90 lm/watt	10	0.450 kg	1/25/50	5
E.145-70431	5207227123498	20W	4000K	90 lm/watt	10	0.450 kg	1/25/50	5
E.145-70432	5207227123504	20W	3000K	90 lm/watt	10	0.450 kg	1/25/50	5



• TIRAS DE LED / LED TAPES
• 10m • WATERPROOF

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**

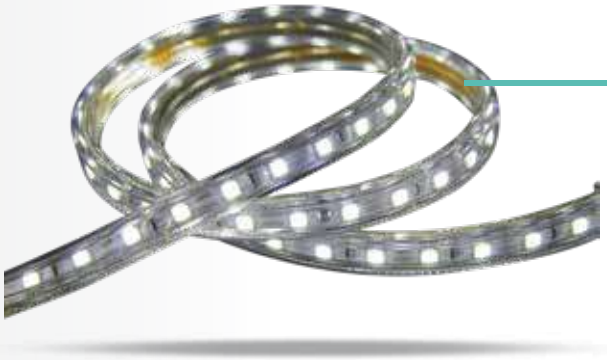

IP65 · DIMMABLE · TAPE CUTTING 1.0m · TAPE TOTAL LENGTH 10 m · TAPE EXPANSION 50 m

PLUS | VOLT 220-240V 50/60Hz | AMPERAGE 1200 mA | E ENERGY CLASS | BEAM ANGLE 120° | LIFETIME 25.000 hr | LED TYPE SMD 5730 | LED 180 CHIPS/m | CRI >70 | START TIME 0.5 Sec | OPERATING TEMPERATURE +40°C -20°C | 2 YEARS GUARANTEE



SilverBag PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K


CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
E.145-70450	5207227079252	14,4W	6500K	112 lm/watt	15	0.200 kg	1/10	10
E.145-70451	5207227079221	14,4W	4000K	110 lm/watt	15	0.200 kg	1/10	10
E.145-70452	5207227079658	14,4W	3000K	100 lm/watt	15	0.200 kg	1/10	10




• TIRAS DE LED / LED TAPES

• 5m

MATERIAL DE PRODUCCION: **COBRE Y PLASTICO**
PRODUCTION MATERIAL: **COPPER & PLASTIC**





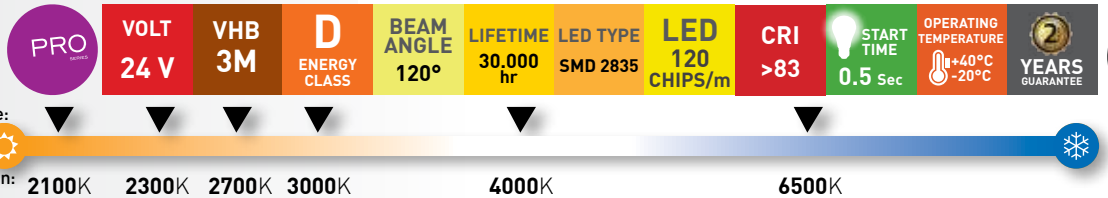




Disponible:

Available in: **2100**K **2300**K **2700**K **3000**K **4000**K **6500**K


CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
PS48-60	8434067015684	11W	6500K	145 lm/watt	10	0.150 kg	5/100	5
PS48-40	8434067011211	11W	4000K	140 lm/watt	10	0.150 kg	5/100	5
PS48-30	8434067009683	11W	3000K	135 lm/watt	10	0.150 kg	5/100	5
PS48-27	8434067016452	11W	2700K	130 lm/watt	10	0.150 kg	5/100	5
PS48-23	8434067184465	11W	2300K	128 lm/watt	10	0.150 kg	5/100	5
PS48-21	8434067184472	11W	2100K	125 lm/watt	10	0.150 kg	5/100	5

• 5m •WATERPROOF

MATERIAL DE PRODUCCION: **COBRE Y SILICONA**
PRODUCTION MATERIAL: **COPPER & SILICONE**





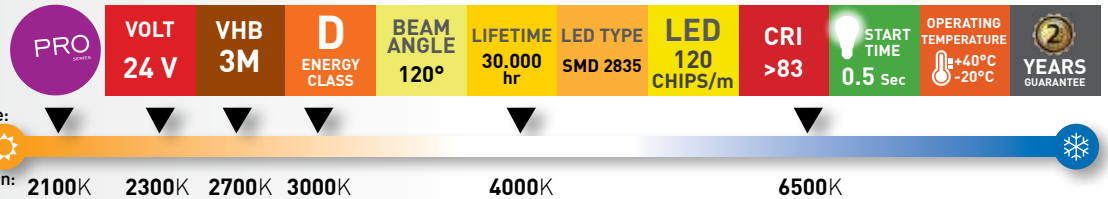



Disponible:

Available in: **2100**K **2300**K **2700**K **3000**K **4000**K **6500**K


CODE	BARCODE	WATT	KELVIN	LUMEN/WATT	WIDTH (mm)	WEIGHT	PACKING	MOQ
PE48-60	8434067184595	11W	6500K	145 lm/watt	12	0.290 kg	5/100	5
PE48-40	8434067009997	11W	4000K	140 lm/watt	12	0.290 kg	5/100	5
PE48-30	8434067014762	11W	3000K	135 lm/watt	12	0.290 kg	5/100	5
PE48-27	8434067184601	11W	2700K	130 lm/watt	12	0.290 kg	5/100	5
PE48-23	8434067184618	11W	2300K	128 lm/watt	12	0.290 kg	5/100	5
PE48-21	8434067184625	11W	2100K	125 lm/watt	12	0.290 kg	5/100	5



- Controladores para tiras de LED
- Controllers for LED Tapes





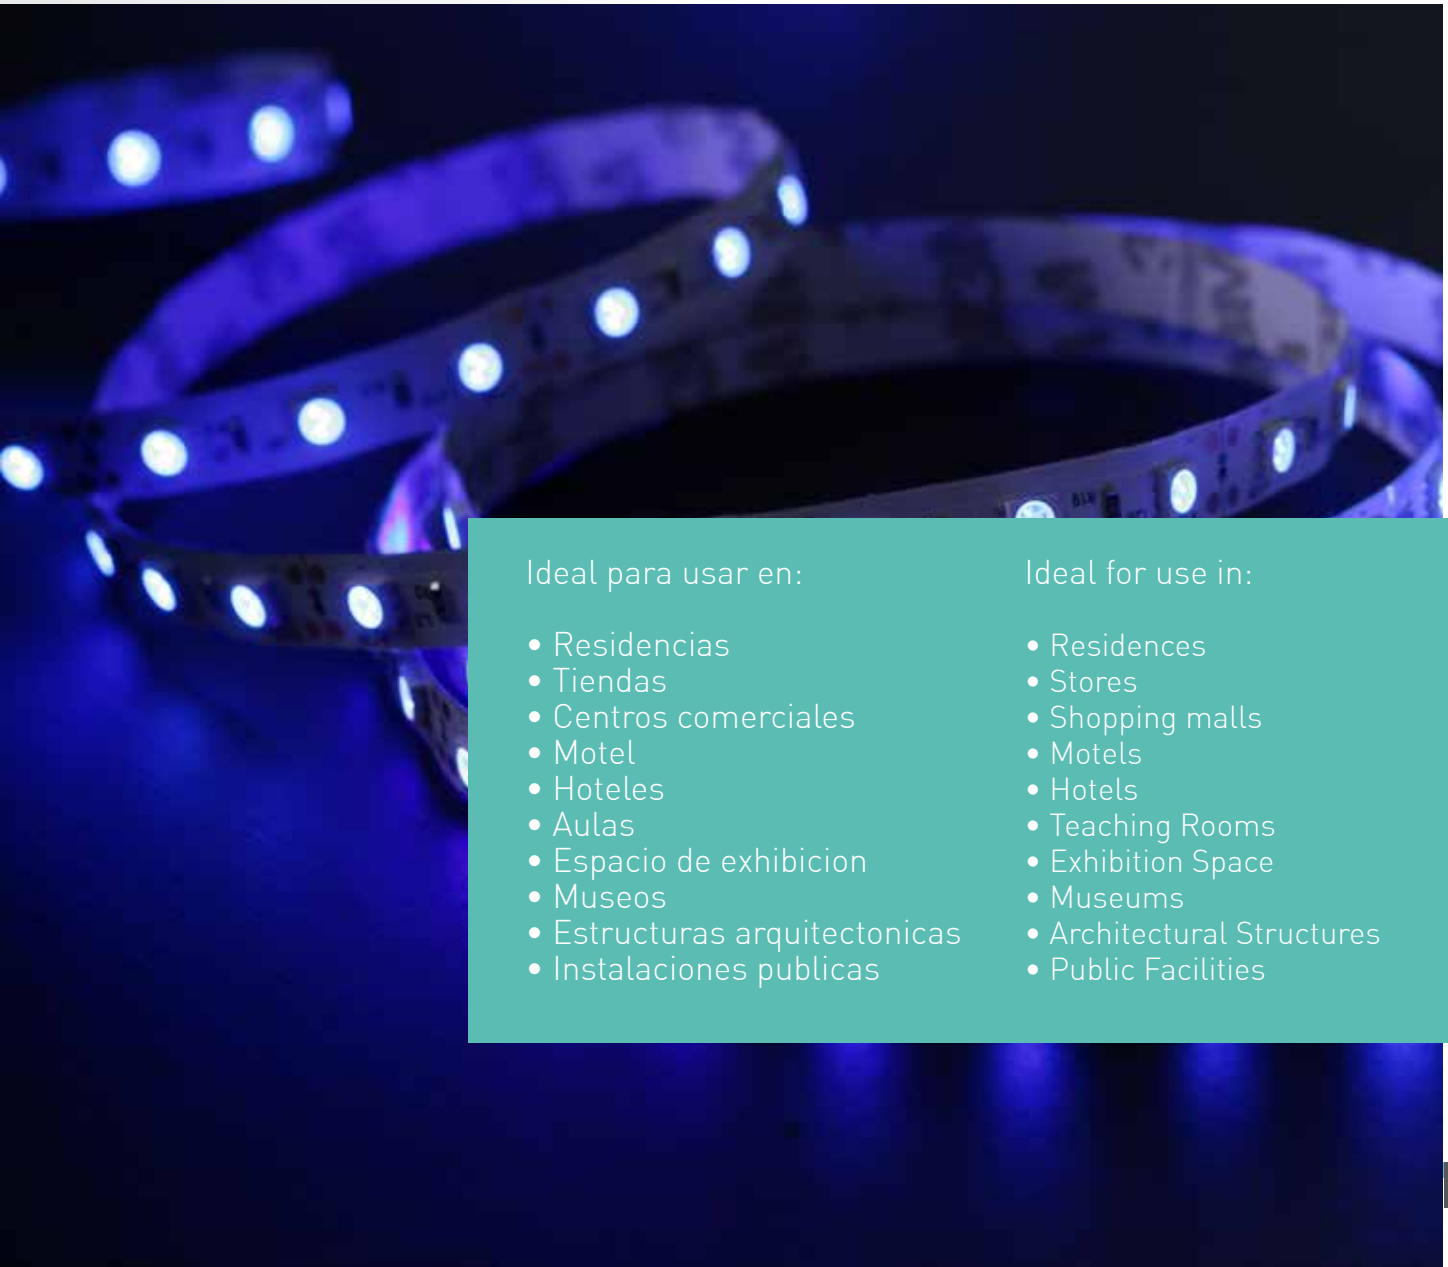

Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Motels
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

- REGULADORES / CONTROLADORES PARA TIRAS DE LED
- WIRELESS DIMMERS / CONTROLLERS FOR LED TAPES
- **PARA TIRAS LED MONOCOLOR / FOR 1 COLOR TAPE**

MATERIAL DE PRODUCCION: **PP Y FPC**
PRODUCTION MATERIAL: **PP & FPC**



EUROLAMP Smart

Powered by tuya Intelligence Inside

VOLT 5-24 V | AMPERAGE 8A | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	DIMENSIONS	VOLTAGE / WATT	WEIGHT	PACKING	MOQ
E.147-70634	5207227117589	60x24x12mm	12V / 96W - 24V / 192W	0.032kg	1/100	1

EUROLAMP Smart

Powered by tuya Intelligence Inside



E.147-70635

EUROLAMP Smart

Powered by tuya Intelligence Inside



E.147-70636

VOLT 12-24 V | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	TYPE	DIMENSIONS	VOLTAGE / WATT	WEIGHT	PACKING	MOQ
E.147-70635	5207227117596	RGB	85x45x23mm	12V / 120W - 24V / 240W	0.040kg	1/100	1
E.147-70636	5207227117602	RGBW	85x45x23mm	12V / 120W - 24V / 240W	0.040kg	1/100	1



• REGULADORES / CONTROLADORES PARA TIRAS DE LED
• WIRELESS DIMMERS / CONTROLLERS FOR LED TAPES

MATERIAL DE PRODUCCION: **PP Y FPC**
PRODUCTION MATERIAL: **PP & FPC**

E.147-70630



E.147-70631



VOLT	AMPERAGE	OPERATING TEMPERATURE		
12-24 V	12A	+40°C -20°C	IP20	1 YEAR GUARANTEE



Nylon Bag with Sticker PACKING

CODE	BARCODE	TYPE	VOLTAGE / WATT	WEIGHT	PACKING	MOQ
E.147-70630	5207227017230	RGB	12V/120W - 24V/240W	0.075kg	1/100	1
E.147-70631	5207227017254	RGB	12V/120W - 24V/240W	0.025kg	1/100	1

E.147-70632



E.147-70633



VOLT	AMPERAGE	OPERATING TEMPERATURE		
12-24 V	12A	+40°C -20°C	IP20	1 YEAR GUARANTEE



Nylon Bag with Sticker PACKING

CODE	BARCODE	TYPE	VOLTAGE / WATT	WEIGHT	PACKING	MOQ
E.147-70632	5207227017285	RGBW	12V/120W - 24V/240W	0.030kg	1/100	1
E.147-70633	5207227017308	RGBCCT	12V/120W - 24V/240W	0.030kg	1/100	1

- CONTROLADORES INALAMBRICOS PARA TIRAS DE LED
- WIRELESS CONTROLLERS FOR LED TAPES

MATERIAL DE PRODUCCION: **PP Y FPC**
PRODUCTION MATERIAL: **PP & FPC**

RGB

E.147-70601

12V / 72W
24V / 144W



RGB

E.147-70603

E.147-70604

12V / 216W
24V / 432W





White Box with Sticker PACKING

VOLT 12-24 V | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE

- Distancia del control remoto / Distance Controlling max 30m
- Pilas / Batteries 2xAAA - 1.5V

CODE	BARCODE	TYPE	AMPERAGE	WEIGHT	PACKING	MOQ
E.147-70601	5206139706010	IR RGB	6A	0.075kg	1/100	1
E.147-70603	5206139004734	RF RGB	-	0.070kg	1/200	1
E.147-70604	5206139051080	RF RGB	6A/channel total 18A	0.060kg	1/100	1

RGBW

12V / 288W
24V / 576W





White Box with Sticker PACKING

VOLT 12-24 V | AMPERAGE 24A | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE

CODE	BARCODE	TYPE	WEIGHT	PACKING	MOQ
E.147-70607	5206139073358	RF RGBW	0.130kg	1/100	1



• DIMMERS / CONTROLADORES PARA TIRAS DE LED
• DIMMERS / CONTROLLERS FOR LED TAPES
• **EMPOTRABLE / RECESSED**

MATERIAL DE PRODUCCION: **PP & FPC**
PRODUCTION MATERIAL: **PP & FPC**

E.147-70620



E.147-70621



E.147-70622



VOLT 12-24 V | AMPERAGE 15A | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



Brown Box
PACKING

CODE	BARCODE	TYPE	VOLTAGE / WATT	WEIGHT	PACKING	MOQ
E.147-70620	5206139077349	NORMAL	12V/180W - 24V/360W	0.180kg	1/100	1
E.147-70621	5206139077370	CCT / 2 CH	12V/180W - 24V/360W	0.180kg	1/100	1
E.147-70622	5206139077394	RGBWW / 5 CH	12V/180W - 24V/360W	0.180kg	1/100	1

• **INALAMBRICO / WIRELESS**

MATERIAL DE PRODUCCION: **PP Y FPC**
PRODUCTION MATERIAL: **PP & FPC**

E.147-70610

12V / 96W
24V / 192W



E.147-70612



E.147-70604

12V / 144W
24V / 288W



VOLT 12-24 V | OPERATING TEMPERATURE +40°C -20°C | IP20 | 1 YEAR GUARANTEE



White Box with Sticker
PACKING

• Απόσταση ελέγχου / Distance Controlling max 30m

CODE	BARCODE	TYPE	AMPERAGE	WEIGHT	PACKING	MOQ
E.147-70610	5206139706102	1 COLOR	8A	0.100kg	1/100	1
E.147-70612	5206139051097	RF / 4 CH	-	0.070kg	1/200	1
E.147-70613	5206139051165	RF	12A	0.060kg	1/100	1

• AMPLIFICADORES PARA TIRAS DE LED
• SIGNAL AMPLIFIERS FOR LED TAPES TAPES

MATERIAL DE PRODUCCION: **PP & FPC**
PRODUCTION MATERIAL: **PP & FPC**

E.147-70650



E.147-70651



E.147-70652





White Box with Sticker PACKING

VOLT 12-24 V | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	TYPE	VOLTAGE / WATT	AMPERAGE	WEIGHT	PACKING	MOQ
E.147-70650	5206139706508	RGB	12V/144W - 24V/288W	12A	0.140kg	1/100	1
E.147-70651	5206139051202	RGB	12V/288W - 24V/576W	24A	0.150kg	1/80	1
E.147-70652	5206139073372	RGBW	12V/288W - 24V/576W	24A	0.100kg	1/100	1

• CONTROLADORES DMX PARA TIRAS DE LED
• CONTROLLERS FOR LED TAPES TAPES

MATERIAL DE PRODUCCION: **PP & FPC**
PRODUCTION MATERIAL: **PP & FPC**

E.147-70680



E.147-70681





White Box with Sticker PACKING

VOLT 12-24 V | 0.350 kg | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	TYPE	VOLTAGE / WATT	AMPERAGE	PACKING	MOQ
E.147-70680	5207227000072	DMX-3 CH	12V/144W - 24V/288W	12A	1/50	1
E.147-70681	5207227007897	DMX-4 CH	12V/192W - 24V/384W	16A	1/50	1




- Fuentes de Alimentacion para Tiras de LED

- Metallic Drivers for LED Tapes





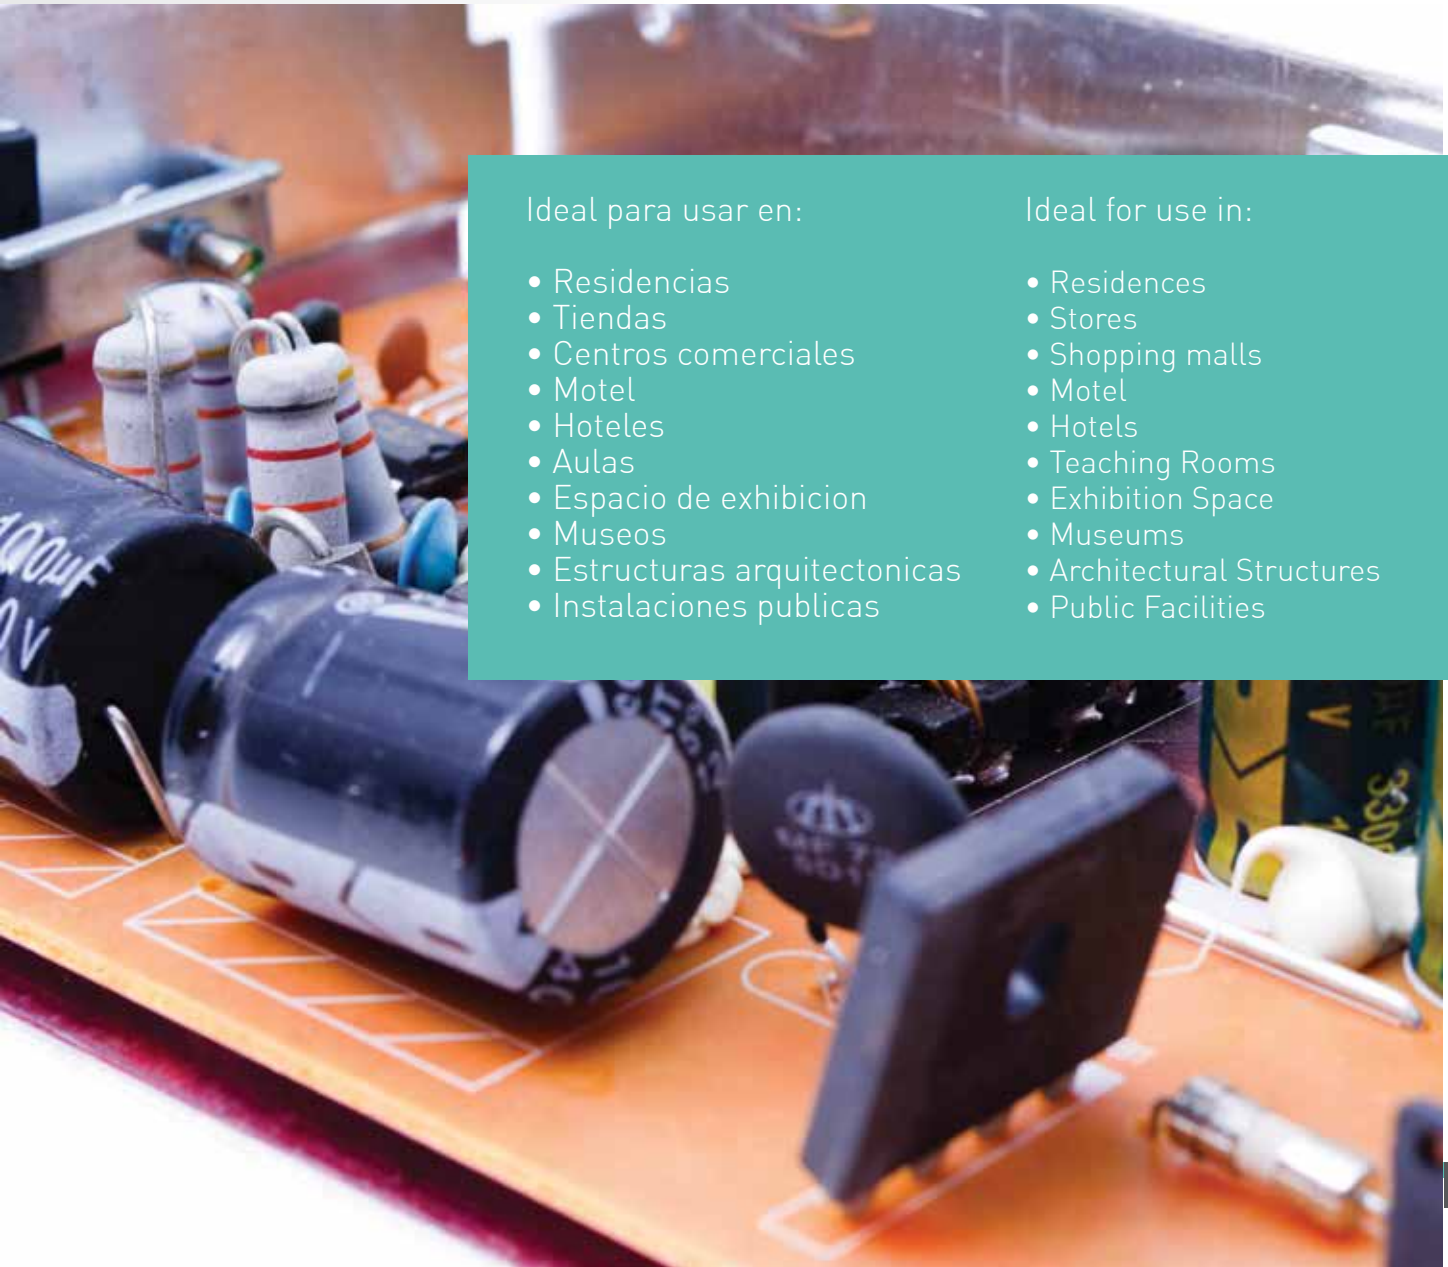

Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

• DRIVERS

PLASTICO / PLASTIC

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



VOLT 100-240V 50/60Hz | OUTPUT VOLTAGE 12V | LIFETIME 5.800 hr | OPERATING TEMPERATURE +40°C -20°C | IP25 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.145-70800	5207227150678	15W	1.25A	95x45x28mm	0.080kg	1/126	1
E.145-70801	5207227150685	25W	2.08A	115x45x28mm	0.110kg	1/108	1
E.145-70802	5207227150692	40W	3.33A	140x45x28mm	0.130kg	1/84	1
E.145-70803	5207227150708	60W	5A	157x45x28mm	0.190kg	1/84	1
E.145-70804	5207227150715	100W	8.3A	192x45x28mm	0.190kg	1/84	1

• DRIVER MINI / METALLIC MINI

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 12V | LIFETIME 6.000 hr | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70560	5207227013560	18W	1.5A	18x18x172mm	0.070kg	1/200	1
E.147-70561	5207227013584	24W	2A	18x18x172mm	0.070kg	1/200	1
E.147-70562	5207227013607	36W	3A	18x18x192mm	0.085kg	1/100	1
E.147-70563	5207227013621	48W	4A	18x18x312mm	0.100kg	1/100	1
E.147-70564	5207227013645	60W	5A	18x18x312mm	0.100kg	1/100	1
E.147-70565	5207227060939	75W	6A	18x18x355mm	0.130kg	1/100	1

• DRIVER SLIM / METALLIC SLIM

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

★BEST SELLER



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 12V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70580	5207227060977	60W	5A	33x40x160mm	0.180kg	1/100	1
E.147-70581	5207227060991	100W	8.3A	36x46x188mm	0.240kg	1/50	1
E.147-70582	5207227061011	120W	10A	36x46x188mm	0.260kg	1/50	1
E.147-70583	5207227061035	150W	12.5A	38x58x200mm	0.380kg	1/50	1
E.147-70584	5207227061059	200W	16.7A	40x71x224mm	0.520kg	1/40	1
E.147-70585	5207227061073	250W	20.9A	40x71x224mm	0.520kg	1/50	1
E.147-70586	5207227061097	350W	29A	43x68x223mm	0.520kg	1/40	1
E.147-70587	5207227063671	400W	33.3A	43x68x223mm	0.580kg	1/40	1



• DRIVERS METALICOS / METALLIC DRIVERS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

BEST SELLER



White Box with Sticker PACKING

VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 12V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70501	5206139705013	10W	0.83A	30x40x70mm	0.070kg	1/200	5
E.147-70502	5206139705020	15W	1.25A	30x40x70mm	0.070kg	1/180	5
E.147-70503	5206139705037	25W	2.08A	21x48x78mm	0.080kg	1/200	2
E.147-70504	5206139705044	40W	3.33A	33x58x85mm	0.120kg	1/80	2
E.147-70510	5206139705105	50W	4.16A	36x78x110mm	0.220kg	1/60	1
E.147-70505	5206139084743	60W	5A	36x78x110mm	0.220kg	1/60	1
E.147-70511	5206139705112	100W	8.3A	40x98x130mm	0.330kg	1/60	1
E.147-70516	5207227013508	120W	10A	40x98x130mm	0.330kg	1/60	1
E.147-70512	5206139705129	150W	12.5A	50x98x160mm	0.430kg	1/50	1
E.147-70513	5206139705136	200W	16.7A	50x98x160mm	0.450kg	1/40	1
E.147-70515	5206139005014	250W	20.83A	50x98x160mm	0.490kg	1/50	1
E.147-70514	5206139705143	350W	29.1A	50x100x200mm	0.610kg	1/40	1
E.147-70517	5207227013522	400W	33.3A	50x100x200mm	0.610kg	1/40	1
E.147-70518	5207227013546	500W	41.6A	65x125x240mm	0.990kg	1/36	1



• WATERPROOF

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**



White Box with Sticker PACKING

VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 12V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP67 | 2 YEARS GUARANTEE

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70520	5206139015884	30W	2.5A	20x30x230mm	0.290kg	1/50	1
E.147-70521	5206139015891	45W	3.75A	25x35x210mm	0.310kg	1/50	1
E.147-70522	5206139705228	60W	5A	32x52x170mm	0.510kg	1/20	1
E.147-70523	5206139705235	100W	8.3A	40x70x178mm	0.730kg	1/20	1
E.147-70524	5206139015907	150W	12.5A	40x70x178mm	0.970kg	1/20	1
E.147-70525	5206139015914	200W	16.7A	43x65x260mm	1.310kg	1/15	1

• DRIVERS

PLASTICO / PLASTIC

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



VOLT 100-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 5.800 hr | OPERATING TEMPERATURE +40°C -20°C | IP25 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.145-70810	5207227150722	15W	0.63A	95x45x28mm	0.080kg	1/126	1
E.145-70811	5207227150739	25W	1.04A	115x45x28mm	0.110kg	1/108	1
E.145-70812	5207227150746	40W	1.67A	140x45x28mm	0.130kg	1/84	1
E.145-70813	5207227150753	60W	2.5A	157x45x28mm	0.190kg	1/84	1
E.145-70814	5207227150760	100W	4.17A	192x45x28mm	0.190kg	1/84	1

• DRIVER MINI / METALLIC MINI

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 6.000 hr | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70570	5207227013751	18W	0.75A	18x18x172mm	0.070kg	1/200	1
E.147-70571	5207227013775	24W	1A	18x18x172mm	0.070kg	1/200	1
E.147-70572	5207227013799	36W	1.5A	18x18x282mm	0.085kg	1/200	1
E.147-70573	5207227013812	48W	2A	18x18x312mm	0.100kg	1/200	1
E.147-70574	5207227013836	60W	2.5A	18x18x312mm	0.100kg	1/200	1
E.147-70575	5207227060953	75W	3A	18x18x312mm	0.145kg	1/200	1

• DRIVER SLIM / METALLIC SLIM

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

★BEST SELLER



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70590	5207227061158	60W	2.5A	33x40x160mm	0.180kg	1/50	1
E.147-70591	5207227061196	100W	4.1A	36x46x188mm	0.240kg	1/50	1
E.147-70592	5207227061219	120W	5A	36x46x188mm	0.260kg	1/50	1
E.147-70593	5207227061233	150W	6.25A	38x58x200mm	0.380kg	1/60	1
E.147-70594	5207227061257	200W	8.3A	40x71x224mm	0.520kg	1/50	1
E.147-70595	5207227061271	250W	10.5A	40x71x224mm	0.520kg	1/50	1
E.147-70596	5207227061295	350W	14.5A	43x68x223mm	0.520kg	1/30	1
E.147-70597	5207227061318	400W	16.7A	43x68x223mm	0.580kg	1/50	1





BEST SELLER

• DRIVER / METALLIC DRIVER

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70531	5206139015938	15W	0.625A	21x48x78mm	0.080kg	1/200	5
E.147-70532	5207227013676	25W	1A	21x48x78mm	0.080kg	1/200	2
E.147-70530	5206139015921	40W	1.67A	33x58x85mm	0.120kg	1/100	1
E.147-70535	5206139015945	50W	2.08A	36x78x110mm	0.220kg	1/60	1
E.147-70533	5207227013690	60W	2.5A	36x78x110mm	0.220kg	1/60	1
E.147-70536	5206139015952	100W	4.16A	40x98x130mm	0.430kg	1/50	1
E.147-70534	5207227013713	120W	5A	40x98x130mm	0.330kg	1/60	1
E.147-70537	5206139015969	150W	6.25A	50x98x160mm	0.430kg	1/40	1
E.147-70538	5206139015976	200W	8.3A	50x98x160mm	0.450kg	1/40	1
E.147-70539	5206139015983	350W	14.6A	50x100x200mm	0.610kg	1/40	1



• WATERPROOF

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

VOLT 200-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 6.000 hr | GROUNDING | OPERATING TEMPERATURE +40°C -20°C | IP67 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.147-70540	5207227013737	30W	1.25A	20x30x230mm	0.290kg	1/50	1
E.147-70541	5207227008399	45W	1.87A	25x35x210mm	0.310kg	1/50	1
E.147-70542	5207227008412	60W	2.5A	32x52x170mm	0.510kg	1/20	1
E.147-70543	5207227005893	100W	4.14A	40x70x178mm	0.740kg	1/20	1
E.147-70544	5207227005886	150W	6.25A	40x70x210mm	0.970kg	1/20	1
E.147-70545	5207227008436	200W	8.3A	43x65x260mm	1.310kg	1/15	1

• DRIVERS

PLASTICO / PLASTIC

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



VOLT 198-265V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 50.000 hr | OPERATING TEMPERATURE +40°C -20°C | IP20 | 5 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
87500852	8434067012409	35W	1.458A	29.8x43x142mm	0.135kg	1/20/140	1
87500665	8434067014038	60W	2.50A	29.8x43x225mm	0.180kg	1/10/120	1
87500666	8434067003353	100W	4.157A	29.8x43x295mm	0.230kg	1/10/80	1
87500855	8434067011280	200W	8.33A	29.8x43x325mm	0.360kg	1/10/80	1

• DRIVER DALI

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 50.000 hr | OPERATING TEMPERATURE +40°C -20°C | IP20 | 5 YEARS GUARANTEE



White Box with Sticker PACKING

	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
28001662	8434067018432	35W	1.453A	30.2x43x195mm	0.160kg	1/20/140	1
28001663	8434067184854	60W	2.50A	29.8x43x225mm	0.180kg	1/10/120	1
28001253	8434067184861	100W	4.167A	29.8x43x295mm	0.250kg	1/10/80	1
28001437	8434067010986	150W	6.25A	29.8x43x325mm	0.270kg	1/10/80	1

• DRIVER TRIAC

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



VOLT 220-240V 50/60Hz | OUTPUT VOLTAGE 24V | LIFETIME 50.000 hr | OPERATING TEMPERATURE +40°C -20°C | IP20 | 5 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	DIMENSIONS	WEIGHT	PACKING	MOQ
GAT075	8434067185226	75W	3,125A	30x42x300mm	0.180kg	1/33	1
GAT150	8434067185233	150W	6,25A	30x42x361mm	0.240kg	1/30	1




- Perfiles de Aluminio
- Aluminium Profiles



Ver PDF
View PDF



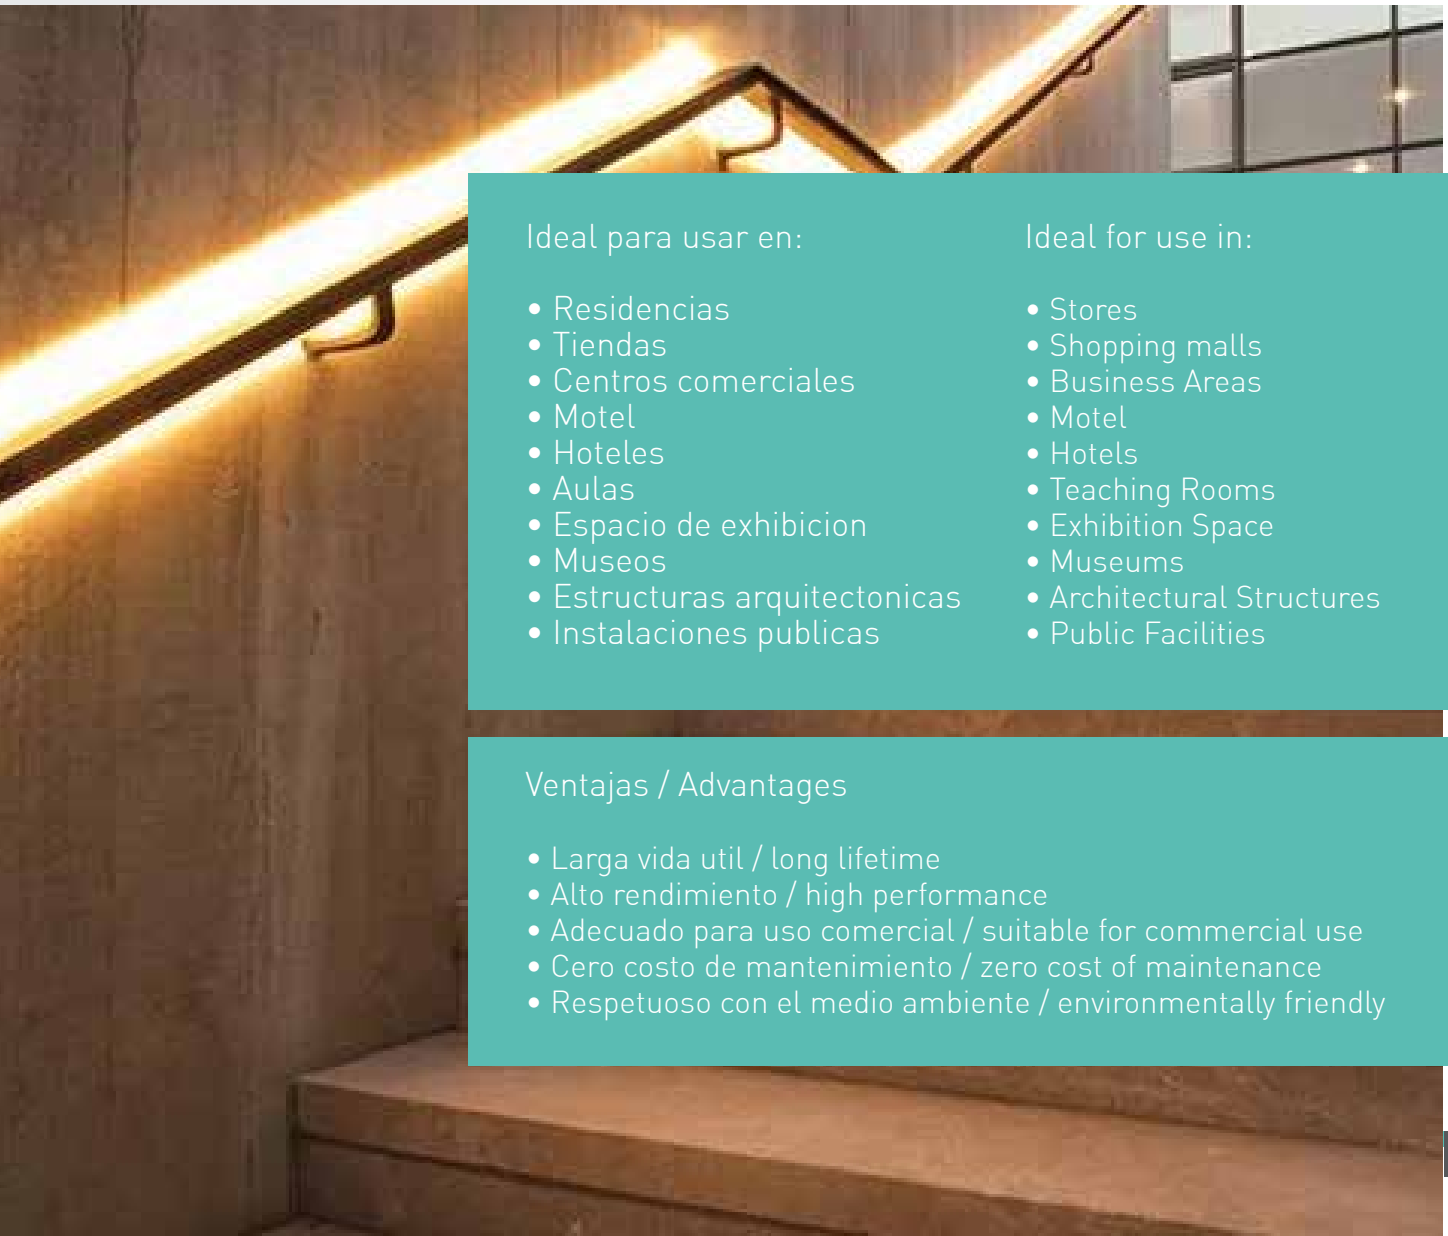

Ideal para usar en:

- Residencias
- Tiendas
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Shopping malls
- Business Areas
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly


• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES



• **Medidas / Dimension**
2000 x 3 x 13mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**




MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 180° | 0.120 kg | IP20 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70760	E.145-70900*	5206139092717	ALUMINUM PROFILE SINGLE HEATSINK DISIPADOR SIMPLE DE PERFIL DE ALUMINIO	1/40	1

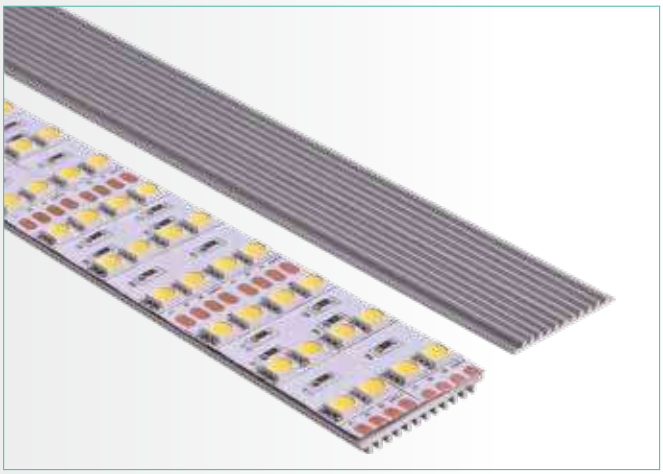

• **Medidas / Dimension**
2000 x 3.5 x 30mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**




MAX WATT 48W

TOTAL LENGTH 2 m | BEAM ANGLE 180° | 0.320 kg | IP20 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70776	E.145-70901*	5207227004216	ALUMINUM PROFILE DOUBLE HEATSINK DISIPADOR DOBLE DE PERFIL DE ALUMINIO	1/30	1

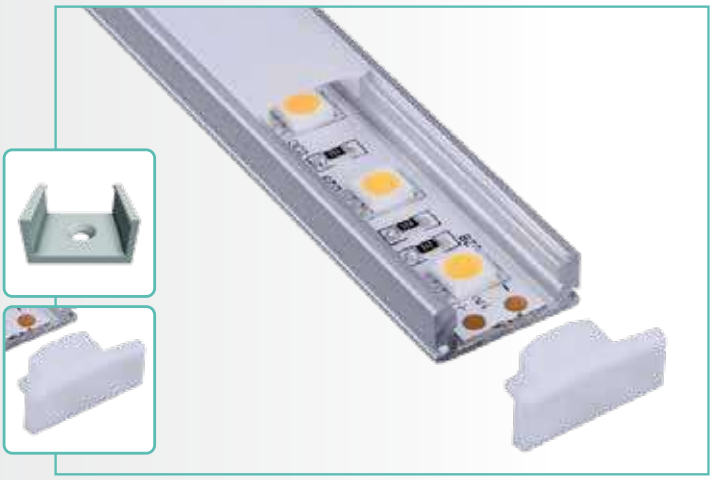

• **Medidas / Dimension**
2000 x 7 x 17.65mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 14.4W

TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.270 kg | IP44 | 2 YEARS GUARANTEE

E.147-70680





Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70762	E.145-70902*	5206139056443	ALUMINUM PROFILE EXTERNAL SINGLE 90° PERFIL ALUMINIO SUPERFICIE 90º	1/100	1
E.147-70813	-	5207227109522	ANGLE 22x11.1mm FOR ALUMINUM PROFILE E.147-70762 ANGULO 22x11.1mm para PERFIL ALUMINIO E.147-70762	1/100	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES



- **Medidas / Dimension**
  2000 x 15 x 6mm
- **Posicionamiento horizontal/vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal / Cross Section**



MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.258 kg | IP44 | 2 YEARS GUARANTEE




Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70903	5207227159466	PERFIL SUPERFICIE 2000x15x6 90° PROFILE EXTERNAL SINGLE 2000x15x6 90°	1/100	1



FLEXIBLE

- **Medidas / Dimension**
  2000 x 5.70 x 18mm
- **Posicionamiento horizontal/ vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal**
  Cross Section






MAX WATT 14.4W

TOTAL LENGTH 2 m | BEAM ANGLE 120° | 0.140 kg | IP44 | 2 YEARS GUARANTEE




Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70774	**E.145-70904***	5207227005596	FLEXIBLE ALUMINUM PROFILE PERFIL DE ALUMINIO FLEXIBLE	1/250	1

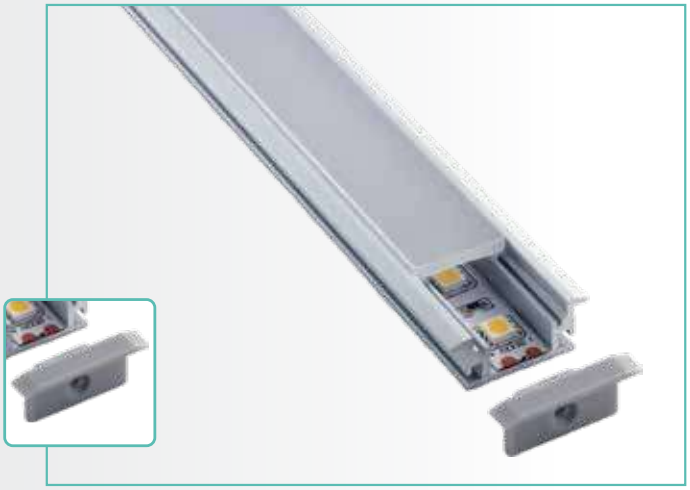

- **Medidas / Dimension**
  2000 x 70 x 24.70mm
- **Corte / Cutting Dimension**
  2000x70x19mm
- **Posicionamiento horizontal/vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal / Cross Section**





MAX WATT 18W


TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.300 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70767	**E.145-70905***	5206139063373	ALUMINUM PROFILE RECESSED SINGLE 90° PERFILES DE ALUMINIO EMPOTRABLE 90°	1/100	1
E.147-70814	-	5207227109539	ANGLE 27.3*14mm FOR ALUMINUM PROFILE ANGULO 27.3x14mm para PERFIL ALUMINIO E.145-70905	1/100	1


• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES

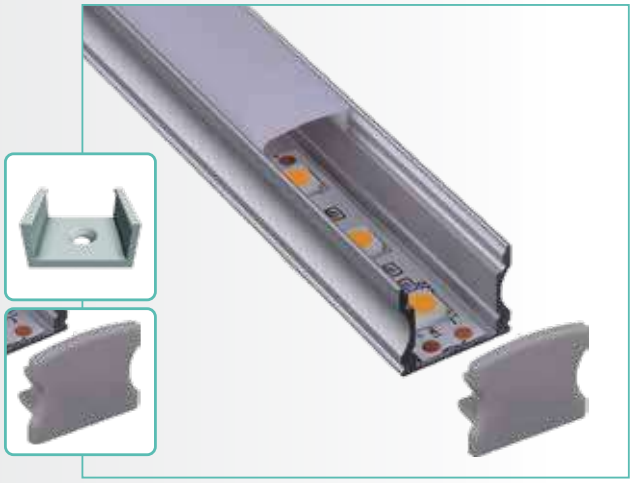

• Medidas / Dimension
2000 x 14.50 x 17.33mm

• Posicionamiento horizontal/vertical
• Horizontal / Vertical Placement

• Seccion transversal / Cross Section






MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.300 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70766	E.145-70906*	5206139056412	ALUMINUM PROFILE EXTERNAL SINGLE 45° PERFILES DE ALUMINIO SUPERFICIE 45°	1/100	1
E.147-70816	-	5207227109553	ANGLE 21.5*18.5mm FOR ALUMINUM PROFILE E.147-70766 ANGULO 21.5x18.5mm para PERFIL ALUMINIO E.147-70766	1/100	1

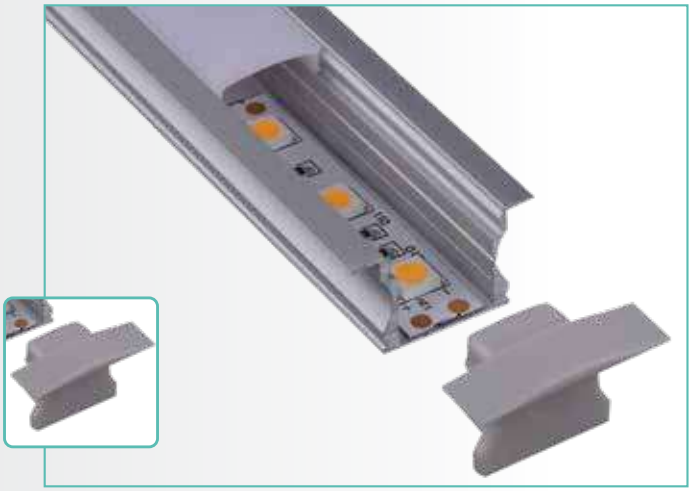


• Medidas / Dimension
2000 x 14.50 x 17.33mm

• Medida Corte / Cutting Dimension
2010x18x15mm

• Posicionamiento horizontal/vertical
• Horizontal / Vertical Placement

• Seccion transversal / Cross Section




MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.300 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70761	E.145-70907*	5206139056467	ALUMINUM PROFILE RECESSED SINGLE 45° PERFILES DE ALUMINIO EMPOTRADO 45°	1/50	1

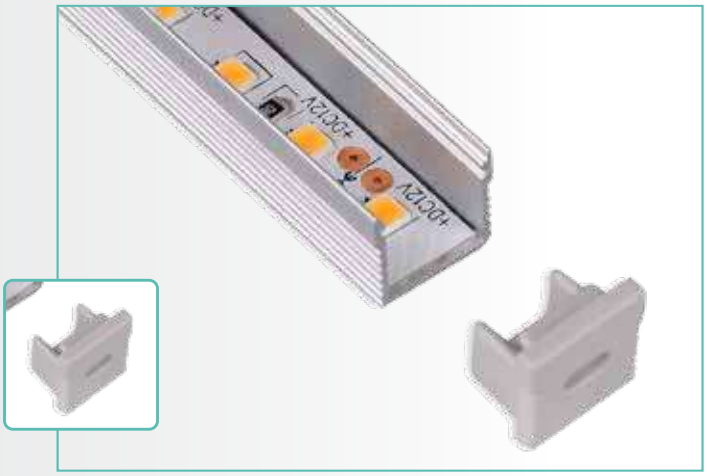

• Medidas / Dimension
2000 x 10 x 13mm

• Posicionamiento horizontal/vertical
• Horizontal / Vertical Placement

• Seccion transversal / Cross Section



MAX WATT 10W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.150 kg | IP44 | 2 YEARS GUARANTEE




Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70908	5207227159510	PERFIL SUPERFICIE 2000x10x13 45° PROFILE EXTERNAL SINGLE 2000x10x13 45°	1/200	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES


• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES

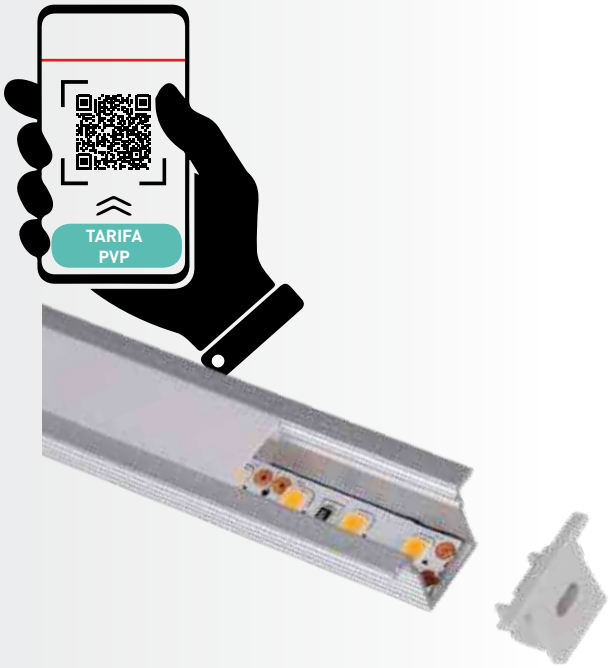

• **Medidas / Dimension**
2000 x 10 x 13mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**




MAX WATT 10W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.250 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70909	5207227159527	PERFIL EMPOTRADO 2000x10x13 45° PROFILE RECESSED SINGLE 2000x10x13 45°	1/100	1

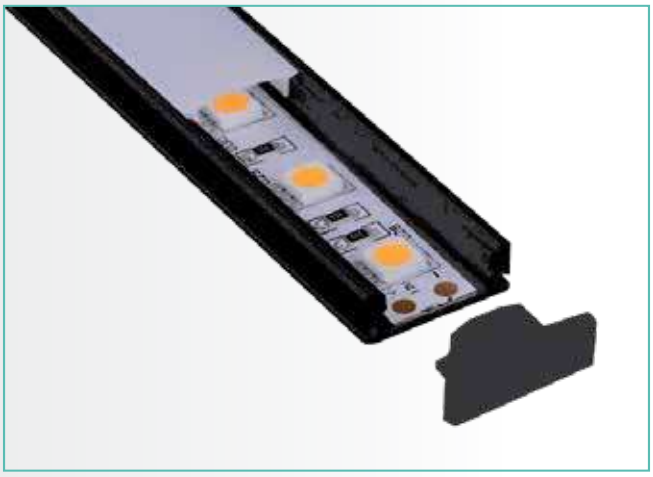

• **Medidas / Dimension**
2000 x 17 x 9mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 14.4W

TOTAL LENGTH 2 m | BEAM ANGLE 120° | 0.350 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70950	5207227159633	PERFIL SUPERFICIE 2000x17x9 90° NEGRO PROFILE EXTERNAL SINGLE 2000x17x9 90° BLACK	1/100	1



• **Medidas / Dimension**
2000 x 5.70 x 18mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 18W


TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.370 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70951	5207227159640	PERFIL EMPOTRADO 2000x17x9 90° NEGRO PROFILE RECESSED SINGLE 2000x17x9 90° BLACK	1/100	1


• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES

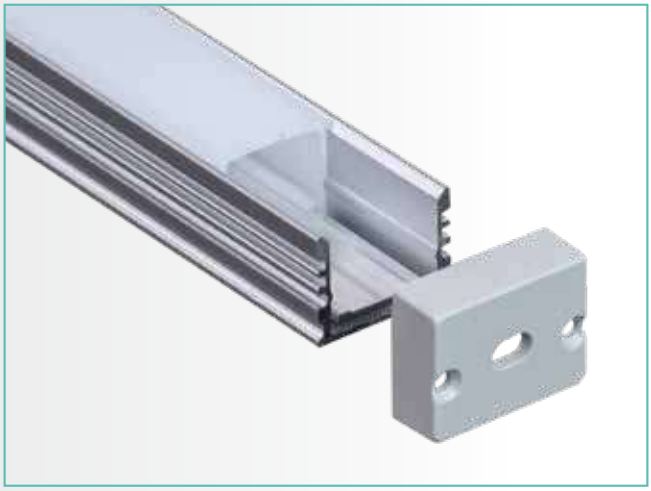

• **Medidas / Dimension**
2000 x 18 x 13mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.420 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70915	5207227160332	PERFIL SUPERFICIE 2000x18x13 45° IP65 PROFILE EXTERNAL SINGLE 2000x18x13 45° IP65	1/50	1




• **Medidas / Dimension**
2000 x 18 x 13mm

• **Corte / Cutting Dimension**
2000x70x190mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.460 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70916	5207227160356	PERFIL EMPOTRADO 2000x18x13 45° IP65 PROFILE RECESSED SINGLE 2000x18x13 45° IP65	1/50	1




• **Medidas / Dimension**
2010 x 27 x 22mm

• **Corte / Cutting Dimension**
2000x70x190mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 1.040 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70768	E.145-70910*	5206139056566	ALUMINUM PROFILE RECESSED FLOOR WATERPROOF SINGLE 45° PERFILES DE ALUMINIO EMPOTRADO SUELO WATERPROOF 45°	1/50	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES










• **Medidas / Dimension**
2000 x 18.11 x 26.48mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 14.4W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.310 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70763	E.145-70912*	5206139056528	ALUMINUM PROFILE SINGLE CORNER 45° PERFIL DE ALUMINIO ESQUINA 45°	1/100	1



• **Medidas / Dimension**
2000 x 16 x 16mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



E.147-70815




MAX WATT 14.4W

TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.200 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70764	E.145-70913*	5206139056481	ALUMINUM PROFILE SINGLE CORNER 90° PERFIL DE ALUMINIO ESQUINA 90°	1/100	1
E.147-70815	-	5207227109546	ANGLE 20*20mm FOR ALUMINUM PROFILE ΓΩΝΙΑ 20*20mm ΓΙΑ ΠΕΡΦΙΛΕΣ DE ALUMINIO	1/100	1

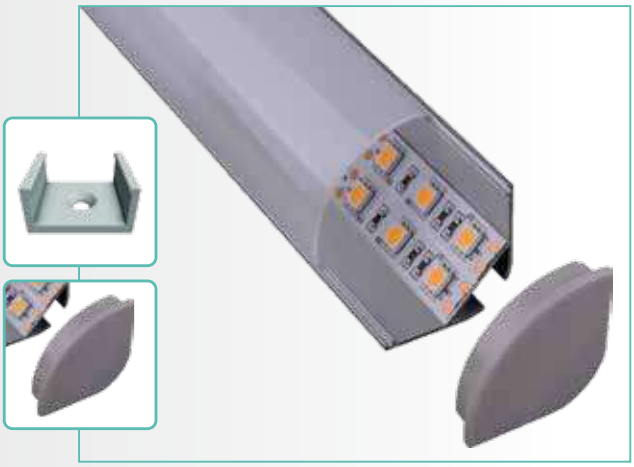

• **Medidas / Dimension**
2000 x 29.70 x 29.70mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 20W


TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.440 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70765	E.145-70914*	5206139056504	ALUMINUM PROFILE DOUBLE 90° PERFIL DE ALUMINIO DOBLE ESQUINA 90°	1/50	1


• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES

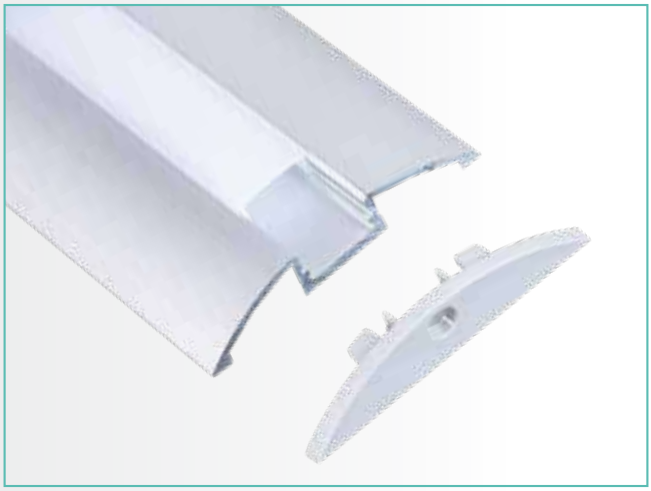

• **Medidas / Dimension**
2000 x 52 x 8mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**




MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 1.040 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70911	5207227159541	PERFIL OVALADO SUPERFICIE 2000x52x8 45° PROFILE EXTERNAL SINGLE OVAL 2000x52x8 45°	1/50	1

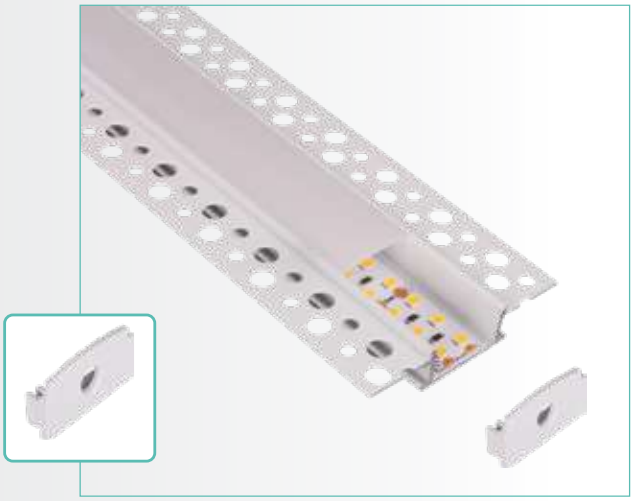


• **Medidas / Dimension**
2000 x 23 x 23mm

• **Διαστάσεις Εγκοπής / Cutting Dimension**
2000x24mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**




MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 90° | 0.140 kg | IP20 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70791	E.145-70920*	5207227109461	ALUMINUM PROFILE RECESSED FOR PLASTERBOARD PERFIL DE ALUMINIO EMPOTRADO PARA PLACA DE YESO	1/15	1

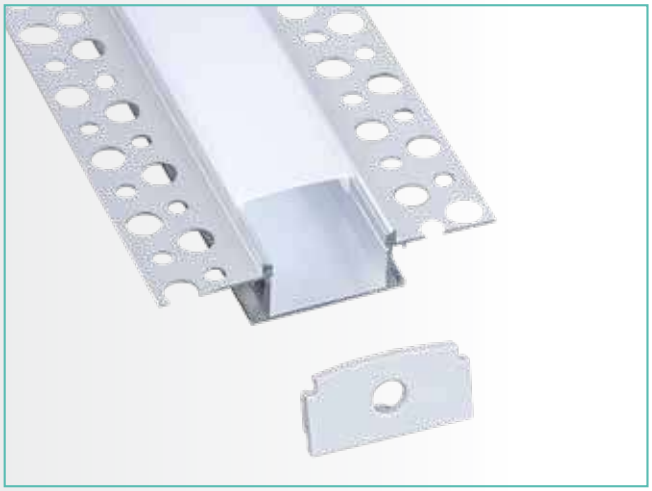

• **Medidas / Dimension**
2000 x 26 x 13mm

• **Posicionamiento horizontal/vertical**
• **Horizontal / Vertical Placement**

• **Seccion transversal / Cross Section**



MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 1.040 kg | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70921	5207227159596	PERFIL DE ALUMINIO EMPOTRADO PARA PLACA DE YESO 2000x26x13 PROFILE RECESSED FOR PLASTERBOARD 2000x26x13	1/50	1


*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



• PERFILES DE ALUMINIO
• ALUMINIUM PROFILES



- **Medidas / Dimension**
  2000 x 46 x 23mm
- **Posicionamiento horizontal/vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal / Cross Section**




MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 1.040 kg | IP65 | 2 YEARS GUARANTEE




Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70922	5207227159602	PERFIL EMPOTRADO PARA PLACA DE YESO 2000x46x23 PROFILE RECESSED FOR PLASTERBOARD 2000x46x23	1/50	1

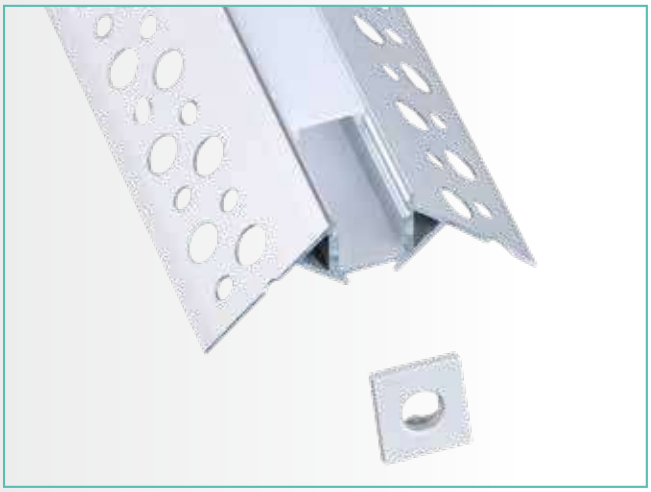

- **Medidas / Dimension**
  2000 x 50 x 22mm
- **Posicionamiento horizontal/vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal / Cross Section**




MAX WATT 24W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 1.040 kg | IP65 | 2 YEARS GUARANTEE




Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70923	5207227159619	ΠΡΟΦΙΛ ΥΕΣΟΑΝΙΔΑΣ ΧΩΝΕΥΤΟ 2000*50*22 PROFILE RECESSED FOR PLASTERBOARD 2000*50*22	1/50	1

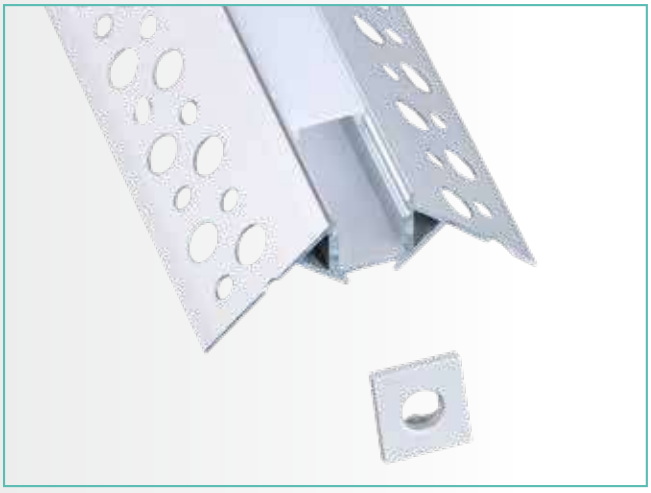

- **Medidas / Dimension**
  2000 x 52 x 22mm
- **Posicionamiento horizontal/vertical**
- **Horizontal / Vertical Placement**
- **Seccion transversal / Cross Section**



MAX WATT 18W

TOTAL LENGTH 2 m | BEAM ANGLE 45° | 0.140 kg | IP44 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.145-70924	5207227159626	PERFIL EMPOTRADO PARA PLACA DE YESO 2000x52x22 PROFILE RECESSED FOR PLASTERBOARD 2000x52x22	1/50	1


- ENCHUFE & CONNECTORES PARA TIRAS DE LED
- PLUGS & CONNECTORS FOR LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PVC**
PRODUCTION MATERIAL: **COPPER & PVC**

VOLT 12-24 V | WATT 7.2-14.4W | 2 CHANNELS | LED TYPE SMD 5050 | 2 YEARS GUARANTEE



Nylon Bag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70704	5206139707048	PLUG FOR LED TAPE ENCHUFE TIRA DE LED	0.002Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70705	5206139707055	PLUG LED CONNECTOR ENCHUFE LED CONECTOR	0.001Kg	1/100	10



LED TYPE SMD 2835

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70715	5206139054364	CORNER TYPE 2 CONNECTIONS CONECTOR DE ANGULO	0.002Kg	1/100	5



LED TYPE SMD 2835

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70718	5206139054418	T TYPE 2 CONNECTIONS CONETOR TIPO T	0.003Kg	1/100	5



LED TYPE SMD 2835

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70751	5206139054258	CROSS TYPE 2 CONNECTIONS CONECTOR TIPO CRUZ	0.004Kg	1/100	5



- ENCHUFE & CONECTORES PARA TIRAS DE LED
- PLUGS & CONNECTORS FOR LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PVC**
PRODUCTION MATERIAL: **COPPER & PVC**

RGB

VOLT 12-24 V | WATT 10W | 4 CHANNELS | LED TYPE SMD 5050 | 2 YEARS GUARANTEE



Nylon Bag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70701	5206139707017	PLUG FOR LED TAPE ENCHUFE TIRA LED	0.004Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70703	5206139707031	PLUG LED CONNECTOR 4 CONNECTIONS ENCHUFE LED CONECTOR 4 CONEXIONES	0.001Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70713	5206139054326	PLUG LED CONNECTOR 4 CONNECTIONS ENCHUFE LED CONECTOR 4 CONEXIONES	0.005Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70716	5206139054371	CORNER TYPE 4 CONNECTIONS CONECTOR ANGULO 4 CONEXIONES	0.002Kg	1/100	5



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70719	5206139054425	T TYPE 4 CONNECTIONS CONECTOR TIPO T 4 CONEXIONES	0.003Kg	1/100	5



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70752	5206139054265	CROSS TYPE 4 CONNECTIONS CONECTOR TIPO CRUZ 4 CONEXIONES	0.004Kg	1/100	5


- ENCHUFE & CONECTORES PARA TIRAS DE LED
- PLUGS & CONNECTORS FOR LED TAPES

MATERIAL DE PRODUCCION: **COBRE Y PVC**
PRODUCTION MATERIAL: **COPPER & PVC**

VOLT 12-24 V | WATT 4.8W | 2 CHANNELS | LED TYPE SMD 3528 | 2 YEARS GUARANTEE




Nylon Bag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70700	5206139707000	PLUG FOR LED TAPE ENCHUFE TIRA LED	0.002Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70702	5206139707024	PLUG LED CONNECTOR ENCHUFE LED CONECTOR	0.001Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70711	5206139054302	PLUG LED CONNECTOR WITH WIRE ENCHUFE LED CONECTOR C/CABLE	0.003Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70714	5206139054340	CORNER TYPE 2 CONNECTIONS CONECTOR ESQUINA	0.002Kg	1/100	5



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70717	5206139054401	T TYPE 2 CONNECTIONS CONECTOR TIPO T	0.003Kg	1/100	5



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70750	5206139054241	CROSS TYPE 2 CONNECTIONS CONECTOR TIPO CRUZ	0.004Kg	1/100	5



• ENCHUFE & CONNECTORS ΓΙΑ TIRAS DE LED
• PLUGS & CONNECTORS FOR LED TAPES

MATERIAL DE PRODUCCION: **ΧΑΛΚΟΣ & PVC**
PRODUCTION MATERIAL: **COPPER & PVC**



Nylon Bag
PACKING

VOLT 12-24 V | WATT 10-20W | 2 CHANNELS | LED TYPE SMD 2835 | 2 YEARS GUARANTEE



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70755	5206139054296	PLUG LED CONNECTOR WITH WIRE ENCHUFE LED CONECTOR C/CABLE	0.003Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70753	5206139054272	PLUG LED CONNECTOR ENCHUFE LED CONECTOR	0.001Kg	1/100	10



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70754	5206139054289	PLUG FOR LED TAPE ENCHUFE TIRA DE LED	0.002Kg	1/100	10



Nylon Bag
PACKING

VOLT 220V | WATT 14.4W | 2 YEARS GUARANTEE



2 CHANNELS | LED TYPE SMD 5050

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70706	5206139045058	PLUG FOR LED TAPE 220V ENCHUFE TIRA LED 220V	0.096Kg	1/250	1



2 CHANNELS | LED TYPE SMD 5050

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70707	5206139035493	CONNECTOR FOR LED TAPE ENCHUFE LED CONNECTOR	0.002Kg	1/1000	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70709	5206139036124	END CAP FOR TAPE LIGHT TAPA FINAL PARA TIRA LED	0.002Kg	1/1000	1




CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70710	5206139036179	MOUNTING CLIP SUJECCION TIRA DE LED	0.001Kg	1/1000	1





• Ilumiacion LED Lineal
• LED Linear Lighting



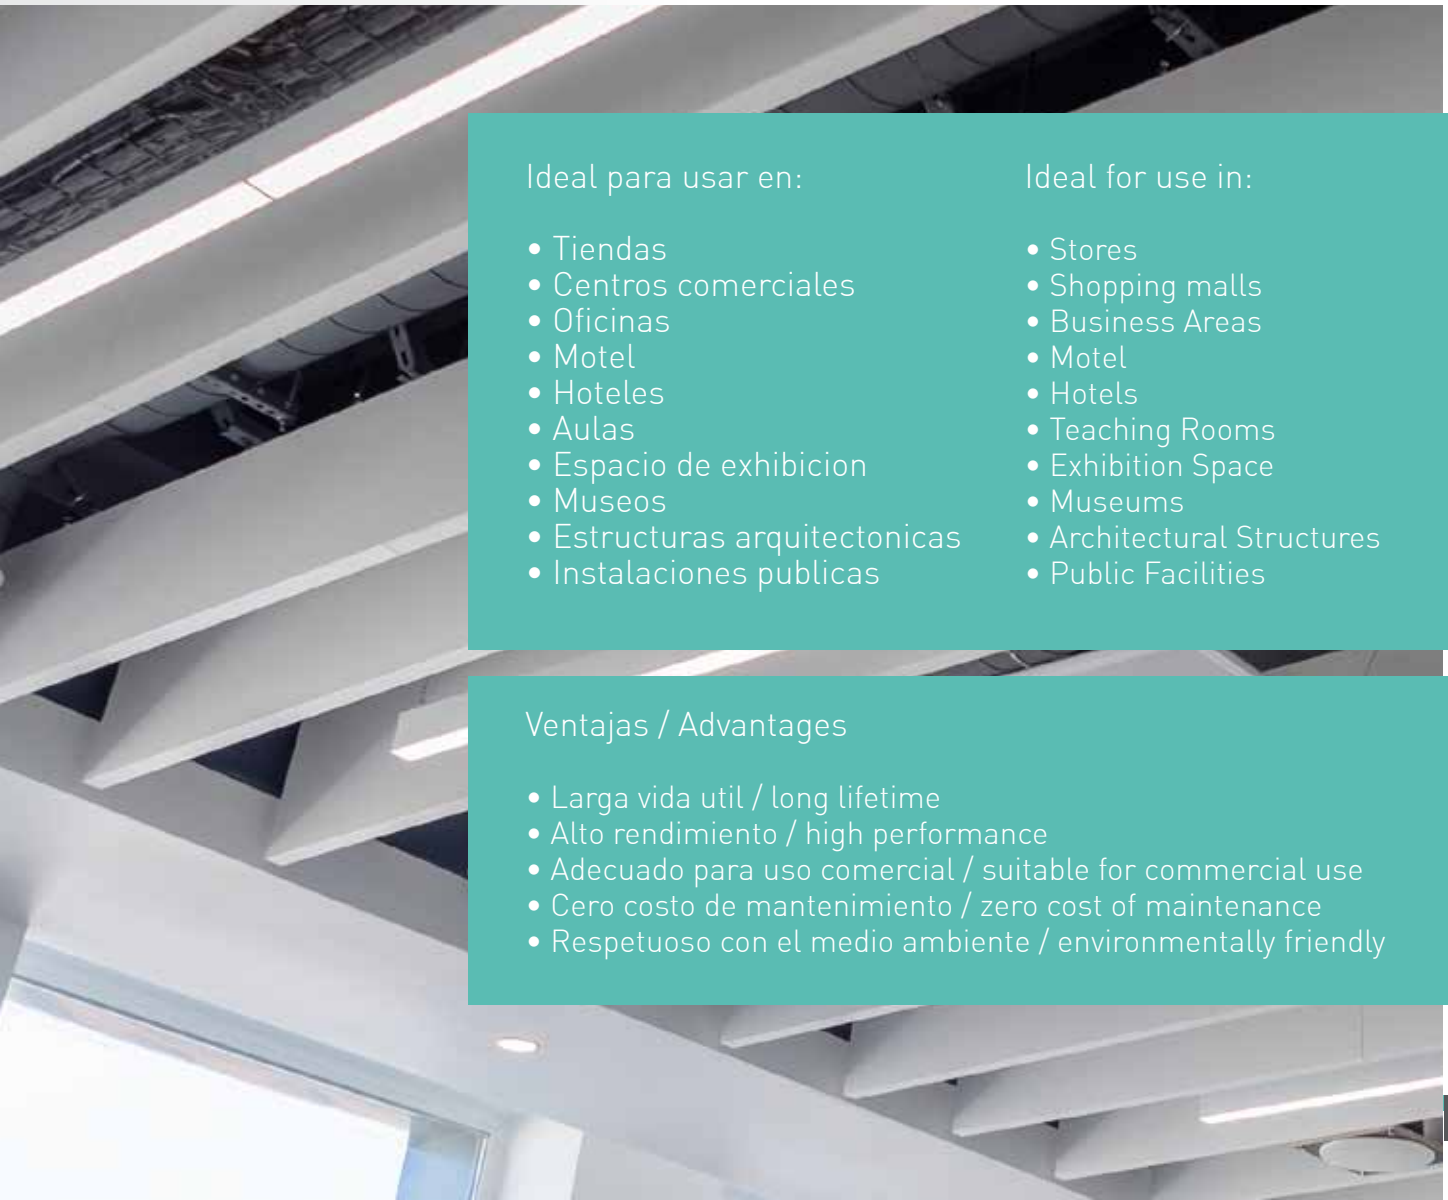

Ideal para usar en:

- Tiendas
- Centros comerciales
- Oficinas
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Stores
- Shopping malls
- Business Areas
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- PERFIL EMPOTRABLE LINEAL CON LED
- LINEAR RECESSED FIXTURE LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

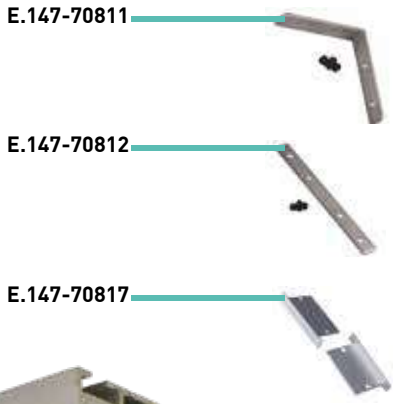

DIMMABLE

DISPONIBLE CON DRIVER REGULABLE
AVAILABLE IN DIMMING MODE

VARIOS COLORES
VARIOUS COLORS



PLUS | VOLT 220-240V 50/60Hz | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 SMD 5050 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Nylon Bag with sticker
PACKING



ACCESORIOS / ACCESSORIES

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70811	5207227109508	CORNER 2 CONNECTIONS METALLIC 90 BEAM ANGLE CONECTOR ESQUINA ANGULO 90º	1/500	5
E.147-70812	5207227109515	ALUMINUM LINK 180 BEAM ANGLE CONECTOR LINEAL ANGULO 180º	1/500	5
E.147-70817	5207227123894	CAP TAPA	1/500	5





- PERFIL EMPOTRABLE LINEAL CON LED
- LINEAR RECESSED FIXTURE LIGHT

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	CUTTING DIMENSION	PACKING	MOQ
E.840-70300	5207227121579	18W	6500K	100 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70301	5207227121586	23W	6500K	100 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70302	5207227121593	30W	6500K	100 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70303	5207227121609	35W	6500K	100 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70304	5207227121616	44W	6500K	100 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70305	5207227121623	58W	6500K	100 lm/w	2000x65x35mm	2000x52mm	1/1	1
E.840-70306	5207227121630	24W	6500K	100 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70307	5207227121647	32W	6500K	100 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70308	5207227121654	40W	6500K	100 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70309	5207227121661	48W	6500K	100 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70310	5207227121678	60W	6500K	100 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70311	5207227121685	80W	6500K	100 lm/w	2000x65x35mm	2000x52mm	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	CUTTING DIMENSION	PACKING	MOQ
E.840-70320	5207227121692	18W	4000K	100 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70321	5207227121708	23W	4000K	100 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70322	5207227121715	30W	4000K	100 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70323	5207227121722	35W	4000K	100 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70324	5207227121739	44W	4000K	100 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70325	5207227121746	58W	4000K	100 lm/w	2000x65x35mm	2000x52mm	1/1	1
E.840-70326	5207227121753	24W	4000K	100 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70327	5207227121760	32W	4000K	100 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70328	5207227121777	40W	4000K	100 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70329	5207227121784	48W	4000K	100 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70330	5207227121791	60W	4000K	100 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70331	5207227121807	80W	4000K	100 lm/w	2000x65x35mm	2000x52mm	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	CUTTING DIMENSION	PACKING	MOQ
E.840-70340	5207227121814	18W	3000K	95 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70341	5207227121821	23W	3000K	95 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70342	5207227121838	30W	3000K	95 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70343	5207227121845	35W	3000K	95 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70344	5207227121852	44W	3000K	95 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70345	5207227121869	58W	3000K	95 lm/w	2000x65x35mm	2000x52mm	1/1	1
E.840-70346	5207227121876	24W	3000K	95 lm/w	600x65x35mm	600x52mm	1/1	1
E.840-70347	5207227121883	32W	3000K	95 lm/w	800x65x35mm	800x52mm	1/1	1
E.840-70348	5207227121890	40W	3000K	95 lm/w	1000x65x35mm	1000x52mm	1/1	1
E.840-70349	5207227121906	48W	3000K	95 lm/w	1200x65x35mm	1200x52mm	1/1	1
E.840-70350	5207227121913	60W	3000K	95 lm/w	1500x65x35mm	1500x52mm	1/1	1
E.840-70351	5207227121920	80W	3000K	95 lm/w	2000x65x35mm	2000x52mm	1/1	1

- PERFIL LINEAL COLGANTE CON LED
- LINEAR SURFACE FIXTURE LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

CON LED INTEGRADO
WITH INTEGRATED LED BOARD

SAMSUNG LED INVETRONIC DRIVER



PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 3 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Brown Box
PACKING



ACCESORIOS / ACCESSORIES

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70820	5207227109560	SUSPENDING WIRE 1m CABLE PARA SUSPENSION 1m	1/100	1
E.147-70822	5207227124259	LIGHTING ACCESSORY POWER SUPPLY CABLE DE ALIMENTACION CON CONECTOR	1/100	1





- PERFIL LINEAL COLGANTE CON LED
- LINEAR SURFACE FIXTURE LIGHTS

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-56800	5207227123573	20W	4000K	100 lm/w	600x50x57mm	0.950Kg	BLACK	1/6	1
E.145-56801	5207227123580	20W	3000K	95 lm/w	600x50x57mm	0.950Kg	BLACK	1/6	1
E.145-56802	5207227123597	30W	4000K	100 lm/w	900x50x57mm	1.430Kg	BLACK	1/6	1
E.145-56803	5207227123603	30W	3000K	95 lm/w	900x50x57mm	1.430Kg	BLACK	1/6	1
E.145-56804	5207227123610	40W	4000K	100 lm/w	1200x50x57mm	1.900Kg	BLACK	1/6	1
E.145-56805	5207227123627	40W	3000K	95 lm/w	1200x50x57mm	1.900Kg	BLACK	1/6	1
E.145-56806	5207227123634	50W	4000K	100 lm/w	1500x50x57mm	2.400Kg	BLACK	1/6	1
E.145-56807	5207227123641	50W	3000K	95 lm/w	1500x50x57mm	2.400Kg	BLACK	1/6	1



- LUMINARIA LINEAL
- LINEAR FIXTURE LIGHTS SPECIAL ORDERS

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

SPECIAL ORDERS

IN DIMENSIONS & COLORS
ΣΕ ΔΙΑΣΤΑΣΕΙΣ & ΧΡΩΜΑΤΑ





DIMMABLE

DISPONIBLE CON DRIVER REGULABLE
AVAILABLE IN DIMMING MODE

VARIOS COLORES
VARIOUS COLORS



PLUS | VOLT 220-240V 50/60Hz | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 SMD 5050 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Nylon Bag with sticker
PACKING

ACCESORIOS / ACCESSORIES

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70820	5207227109560	SUSPENDING WIRE 1m CABLE PARA SUSPENSION 1m	1/100	1
E.147-70821	5207227123917	CAP TAPA	1/500	1





• LUMINARIA LINEAL
• LINEAR FIXTURE LIGHTS SPECIAL ORDERS


CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	PACKING	MOQ
E.840-70200	5207227121210	18W	6500K	100 lm/w	600x50x50mm	1/1	1
E.840-70201	5207227121227	23W	6500K	100 lm/w	800x50x50mm	1/1	1
E.840-70202	5207227121234	30W	6500K	100 lm/w	1000x50x50mm	1/1	1
E.840-70203	5207227121241	35W	6500K	100 lm/w	1200x50x50mm	1/1	1
E.840-70204	5207227121258	44W	6500K	100 lm/w	1500x50x50mm	1/1	1
E.840-70205	5207227121265	58W	6500K	100 lm/w	2000x50x50mm	1/1	1
E.840-70206	5207227121272	24W	6500K	100 lm/w	600x50x50mm	1/1	1
E.840-70207	5207227121289	32W	6500K	100 lm/w	800x50x50mm	1/1	1
E.840-70208	5207227121296	40W	6500K	100 lm/w	1000x50x50mm	1/1	1
E.840-70209	5207227121302	48W	6500K	100 lm/w	1200x50x50mm	1/1	1
E.840-70210	5207227121319	60W	6500K	100 lm/w	1500x50x50mm	1/1	1
E.840-70211	5207227121326	80W	6500K	100 lm/w	2000x50x50mm	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	PACKING	MOQ
E.840-70220	5207227121333	18W	4000K	100 lm/w	600x50x50mm	1/1	1
E.840-70221	5207227121340	23W	4000K	100 lm/w	800x50x50mm	1/1	1
E.840-70222	5207227121357	30W	4000K	100 lm/w	1000x50x50mm	1/1	1
E.840-70223	5207227121364	35W	4000K	100 lm/w	1200x50x50mm	1/1	1
E.840-70224	5207227121371	44W	4000K	100 lm/w	1500x50x50mm	1/1	1
E.840-70225	5207227121388	58W	4000K	100 lm/w	2000x50x50mm	1/1	1
E.840-70226	5207227121395	24W	4000K	100 lm/w	600x50x50mm	1/1	1
E.840-70227	5207227121418	32W	4000K	100 lm/w	800x50x50mm	1/1	1
E.840-70228	5207227121401	40W	4000K	100 lm/w	1000x50x50mm	1/1	1
E.840-70229	5207227121425	48W	4000K	100 lm/w	1200x50x50mm	1/1	1
E.840-70230	5207227121432	60W	4000K	100 lm/w	1500x50x50mm	1/1	1
E.840-70231	5207227121449	80W	4000K	100 lm/w	2000x50x50mm	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	PACKING	MOQ
E.840-70240	5207227121456	18W	3000K	95 lm/w	600x50x50mm	1/1	1
E.840-70241	5207227121463	23W	3000K	95 lm/w	800x50x50mm	1/1	1
E.840-70242	5207227121470	30W	3000K	95 lm/w	1000x50x50mm	1/1	1
E.840-70243	5207227121487	35W	3000K	95 lm/w	1200x50x50mm	1/1	1
E.840-70244	5207227121494	44W	3000K	95 lm/w	1500x50x50mm	1/1	1
E.840-70245	5207227121517	58W	3000K	95 lm/w	2000x50x50mm	1/1	1
E.840-70246	5207227121500	24W	3000K	95 lm/w	600x50x50mm	1/1	1
E.840-70247	5207227121524	32W	3000K	95 lm/w	800x50x50mm	1/1	1
E.840-70248	5207227121531	40W	3000K	95 lm/w	1000x50x50mm	1/1	1
E.840-70249	5207227121548	48W	3000K	95 lm/w	1200x50x50mm	1/1	1
E.840-70250	5207227121555	60W	3000K	95 lm/w	1500x50x50mm	1/1	1
E.840-70251	5207227121562	80W	3000K	95 lm/w	2000x50x50mm	1/1	1

- LUMINARIA OVAL LINEAL DE SUPERFICIE
- OVAL LINEAR SURFACE FIXTURE LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

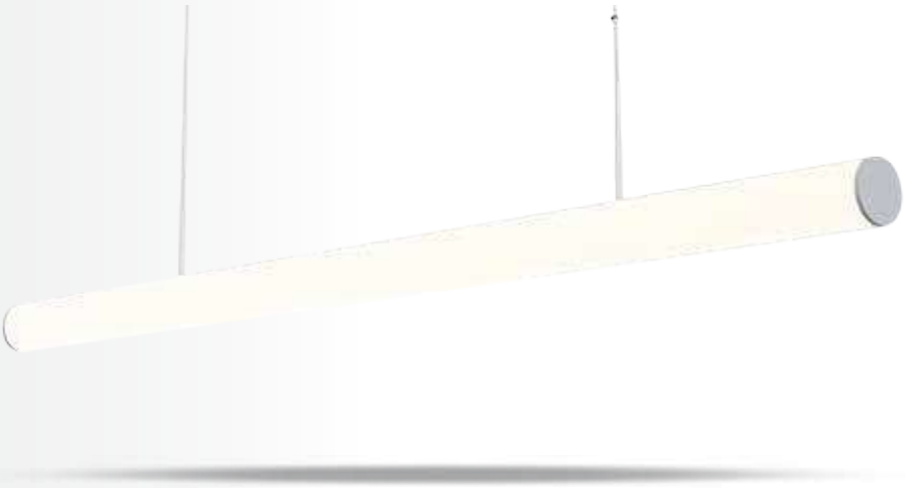

PRO | VOLT 220-240V 50/60Hz | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 SMD 5050 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Nylon Bag with sticker
PACKING



EΞAPTHMATA / ACCESSORIES

CODE	BARCODE	DESCRIPTION	PACKING	MOQ
E.147-70819	5207227123900	COVER TAPA	1/500	1
E.147-70820	5207227109560	SUSPENDING WIRE 1m CABLE PARA SUSPENSION 1m	1/100	1





- LUMINARIA OVAL LINEAL DE SUPERFICIE
- OVAL LINEAR SURFACE FIXTURE LIGHTS

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.840-70560	5207227122293	18W	6500K	100 lm/w	Ø60x600mm	WHITE	1/1	1
E.840-70561	5207227122309	23W	6500K	100 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70562	5207227122316	30W	6500K	100 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70563	5207227122323	35W	6500K	100 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70564	5207227122330	44W	6500K	100 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70565	5207227122347	58W	6500K	100 lm/w	Ø60x2000 mm	WHITE	1/1	1
E.840-70566	5207227122354	24W	6500K	100 lm/w	Ø60x600 mm	WHITE	1/1	1
E.840-70567	5207227122361	32W	6500K	100 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70568	5207227122378	40W	6500K	100 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70569	5207227122385	48W	6500K	100 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70570	5207227122392	60W	6500K	100 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70571	5207227122408	80W	6500K	100 lm/w	Ø60x2000 mm	WHITE	1/1	1


CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.840-70580	5207227122415	18W	4000K	100 lm/w	Ø60x600 mm	WHITE	1/1	1
E.840-70581	5207227122422	23W	4000K	100 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70582	5207227122439	30W	4000K	100 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70583	5207227122446	35W	4000K	100 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70584	5207227122453	44W	4000K	100 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70585	5207227122460	58W	4000K	100 lm/w	Ø60x2000 mm	WHITE	1/1	1
E.840-70586	5207227122477	24W	4000K	100 lm/w	Ø60x600 mm	WHITE	1/1	1
E.840-70587	5207227122484	32W	4000K	100 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70588	5207227122491	40W	4000K	100 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70589	5207227122507	48W	4000K	100 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70590	5207227122514	60W	4000K	100 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70591	5207227122521	80W	4000K	100 lm/w	Ø60x2000 mm	WHITE	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.840-70600	5207227122538	18W	3000K	95 lm/w	Ø60x600 mm	WHITE	1/1	1
E.840-70601	5207227122545	23W	3000K	95 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70602	5207227122552	30W	3000K	95 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70603	5207227122569	35W	3000K	95 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70604	5207227122576	44W	3000K	95 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70605	5207227122583	58W	3000K	95 lm/w	Ø60x2000 mm	WHITE	1/1	1
E.840-70606	5207227122590	24W	3000K	95 lm/w	Ø60x600 mm	WHITE	1/1	1
E.840-70607	5207227122606	32W	3000K	95 lm/w	Ø60x800 mm	WHITE	1/1	1
E.840-70608	5207227122613	40W	3000K	95 lm/w	Ø60x1000 mm	WHITE	1/1	1
E.840-70609	5207227122620	48W	3000K	95 lm/w	Ø60x1200 mm	WHITE	1/1	1
E.840-70610	5207227122637	60W	3000K	95 lm/w	Ø60x1500 mm	WHITE	1/1	1
E.840-70611	5207227122644	80W	3000K	95 lm/w	Ø60x2000 mm	WHITE	1/1	1

- LUMINARIA LINEAL SUPERFICIE NIQUEL MATE
- LINEAR SURFACE FIXTURE LIGHTS NICKEL MAT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

NICKEL MAT

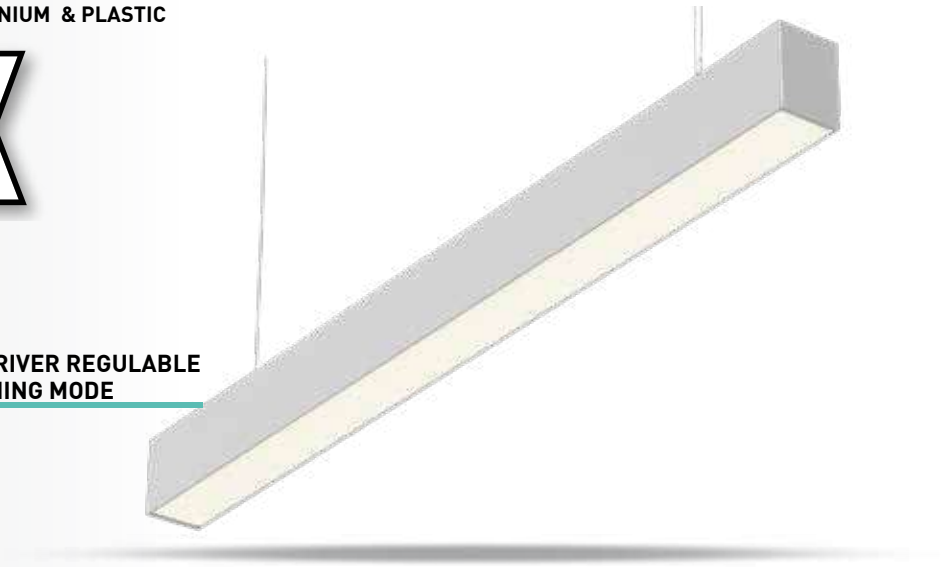

DIMMABLE

DISPONIBLE CON DRIVER REGULABLE
AVAILABLE IN DIMMING MODE

PRO | VOLT 220-240V 50/60Hz | NOT DIMMABLE | BEAM ANGLE 110° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Nylon Bag with sticker
PACKING







- LUMINARIA LINEAL SUPERFICIE NIQUEL MATE
- LINEAR SURFACE FIXTURE LIGHTS NICKEL MAT

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.840-70500	5207227121937	18W	6500K	100 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70501	5207227121944	23W	6500K	100 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70502	5207227121951	30W	6500K	100 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70503	5207227121968	35W	6500K	100 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70504	5207227121975	44W	6500K	100 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70505	5207227121982	58W	6500K	100 lm/w	2000x50x75mm	NICKEL MAT	1/1	1
E.840-70506	5207227121999	24W	6500K	100 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70507	5207227122002	32W	6500K	100 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70508	5207227122019	40W	6500K	100 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70509	5207227122026	48W	6500K	100 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70510	5207227122033	60W	6500K	100 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70511	5207227122040	80W	6500K	100 lm/w	2000x50x75mm	NICKEL MAT	1/1	1


CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	PACKING	PACKING	MOQ
E.840-70520	5207227122057	18W	4000K	100 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70521	5207227122064	23W	4000K	100 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70522	5207227122071	30W	4000K	100 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70523	5207227122088	35W	4000K	100 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70524	5207227122095	44W	4000K	100 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70525	5207227122101	58W	4000K	100 lm/w	2000x50x75mm	NICKEL MAT	1/1	1
E.840-70526	5207227122118	24W	4000K	100 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70527	5207227122125	32W	4000K	100 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70528	5207227122132	40W	4000K	100 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70529	5207227122149	48W	4000K	100 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70530	5207227122156	60W	4000K	100 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70531	5207227122163	80W	4000K	100 lm/w	2000x50x75mm	NICKEL MAT	1/1	1

CODE	BARCODE	WATT	KELVIN	LUMENS / WATT	DIMENSIONS	PACKING	PACKING	MOQ
E.840-70540	5207227122170	18W	3000K	95 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70541	5207227122187	23W	3000K	95 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70542	5207227122194	30W	3000K	95 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70543	5207227122200	35W	3000K	95 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70544	5207227122217	44W	3000K	95 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70545	5207227122224	58W	3000K	95 lm/w	2000x50x75mm	NICKEL MAT	1/1	1
E.840-70546	5207227122231	24W	3000K	95 lm/w	600x50x75mm	NICKEL MAT	1/1	1
E.840-70547	5207227122248	32W	3000K	95 lm/w	800x50x75mm	NICKEL MAT	1/1	1
E.840-70548	5207227122255	40W	3000K	95 lm/w	1000x50x75mm	NICKEL MAT	1/1	1
E.840-70549	5207227122262	48W	3000K	95 lm/w	1200x50x75mm	NICKEL MAT	1/1	1
E.840-70550	5207227122279	60W	3000K	95 lm/w	1500x50x75mm	NICKEL MAT	1/1	1
E.840-70551	5207227122286	80W	3000K	95 lm/w	2000x50x75mm	NICKEL MAT	1/1	1

- ACCESORIOS PARA LUMINARIAS LINEALES
- LINEAR LIGHT FIXTURES ACCESSORIES

2 YEARS GUARANTEE

Brown Box PACKING



15x2x100mm

E.147-70781 5207227017346 ALUMINUM LINK STRAIGHT A5075
CONECTOR LINEAL A5075

kg 0.020 kg | 1/3000 | MOQ 1



150x75x150mm

E.147-70782 5207227017360 ANGLE ALUMINUM A5075
ANGULO ALUMINIO A5075


kg 0.210 kg | 1/30 | MOQ 1



250x125x75mm

E.147-70783 5207227017384 'T'' SHAPE ALUMINUM A5075
CONECTOR TIPO T A5075

kg 0.260 kg | 1/20 | MOQ 1



250x250x75mm

E.147-70784 5207227017407 ALUMINUM CROSS A5075
CONECTOR TIPO CRUZ

kg 0.290 kg | 1/20 | MOQ 1



50x2x75mm

E.147-70785 5207227017421 CAP ALUMINUM A5075
TAPA ALUMINIO A5075

kg 0.002 kg | 1/1000 | MOQ 1




kg 0.001 kg | 1/1000

20x10x30mm

E.147-70786 5207227017445 EXTERNAL FITTING FOOT BASE ALUMINUM A5075
BASE DE MONTAJE EN SUPERFICIE A5075

MOQ 1



kg 0.010 kg | 1/500

25x30x40mm

E.147-70787 5207227017469 FOOT BASE FIXING SUSPENSION ALUMINUM A5075
BASE DE MONTAJE EN SUSPENSION A5075

MOQ 1



kg 0.050 kg | 1/400

1.5x1.5x2000mm

E.147-70788 5207227017483 SUSPENDING WIRE PENDANT INSTALLATION A5075
CABLE SUSPENSION A5075

MOQ 1



- Aros empotrables para bombilla GU10

- Spots recessed for bulb GU10



Ideal para usar en:

- Tiendas
- Residencias
- Centros comerciales
- Motel
- Hoteles
- Aulas
- Espacio de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Stores
- Residences
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

• MOBBLY R







Color Box
PACKING


MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**



CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1002-11	8434067096713	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1002-1M	8434067183291	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1002-22	8434067096720	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1002-33	8434067096744	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1002-3V	8434067096782	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1002-55	8434067096805	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1002-5M	8434067096812	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1002-CV	8434067096843	12V / 230V	**G5,3 / GU10**	ANTIQUE COPPER / COBRE ENV.	1/100	1
1002-MX	8434067096935	12V / 230V	**G5,3 / GU10**	BROWN / MARRON OXIDO	1/100	1
1002-NS	8434067097567	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1

• MOBBLY K







Color Box
PACKING

MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**



CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1012-11	8434067100892	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1012-1M	8434067183475	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1012-22	8434067100908	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1012-33	8434067100922	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1012-3V	8434067100939	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1012-55	8434067100946	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1012-5M	8434067100953	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1012-CV	8434067100960	12V / 230V	**G5,3 / GU10**	ANTIQUE COPPER / COBRE ENV.	1/100	1
1012-MX	8434067101004	12V / 230V	**G5,3 / GU10**	BROWN / MARRON OXIDO	1/100	1
1012-NS	8434067101035	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1



• FIKS





Color Box
PACKING

MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**


Ø60mm CUTTING DIAMETER | MAX WATT LED 7W | 0.050 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1005-01	8434067098045	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1005-1M	8434067183376	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1005-02	8434067098052	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1005-03	8434067098069	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1005-3V	8434067098076	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1005-05	8434067098090	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1005-5M	8434067098106	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1005-CV	8434067098137	12V / 230V	**G5,3 / GU10**	ANTIQUE COPPER / COBRE ENV.	1/100	1
1005-MX	8434067098243	12V / 230V	**G5,3 / GU10**	BROWN / MARRON OXIDO	1/100	1
1005-NS	8434067098250	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1



• Mini FIKS
MR-11 / GU-11







Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

Ø50mm CUTTING DIAMETER | MAX WATT LED 3W | 0.045 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1018-01	8434067102551	12V / 230V	**G5,3 / GU11**	WHITE / BLANCO	1/50	1
1018-02	8434067102568	12V / 230V	**G5,3 / GU11**	MATT BLACK / NEGRO MATE	1/50	1
1018-3V	8434067102582	12V / 230V	**G5,3 / GU11**	ANTIQUE BRASS / ORO VIEJO	1/50	1
1018-NS	8434067102667	12V / 230V	**G5,3 / GU11**	NICKEL SATIN/ NIQUEL SAT	1/50	1

MR-11 / 12V





GU-11 / 230V


• TAHDEM













Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**




CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1030-11	8434067096713	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1030-3V	8434067183291	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1030-5M	8434067096720	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1030-NS	8434067096744	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1

• DIDDOS R









Color Box
PACKING

MATERIAL DE PRODUCCION: **VIDRIO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**




CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1125-1M	8434067119467	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1125-AL	8434067119566	12V / 230V	**G5,3 / GU10**	ALUMINIUM / ALUMINIO RAYADO	1/100	1

• DIDDOS K









Color Box
PACKING

MATERIAL DE PRODUCCION: **VIDRIO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**



CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1126-1M	8434067120357	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1126-AL	8434067120142	12V / 230V	**G5,3 / GU10**	ALUMINIUM / ALUMINIO RAYADO	1/100	1




• KATTA












Color Box
PACKING


MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.050 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1505-11	8434067185059	12V / 230V	G5,3 / GU10	WHITE / BLANCO	1/100	1
1505-22	8434067185066	12V / 230V	G5,3 / GU10	MATT BLACK / NEGRO MATE	1/100	1
1505-3V	8434067185073	12V / 230V	G5,3 / GU10	ANTIQUE BRASS / ORO VIEJO	1/100	1
1505-55	8434067185080	12V / 230V	G5,3 / GU10	CHROME / CROMO	1/100	1
1505-5M	8434067185097	12V / 230V	G5,3 / GU10	MATT CHROME / CROMO MATE	1/100	1
1505-NS	8434067185103	12V / 230V	G5,3 / GU10	NICKEL SATIN/ NIQUEL SAT	1/100	1

• STIL R

















Color Box
PACKING

MATERIAL DE PRODUCCION: **VIDRIO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**


Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.095 kg | IP20 | 2 YEARS GUARANTEE


CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1121-AL	8434067108676	12V / 230V	G5,3 / GU10	ALUMINIUM / ALUMINIO RAYADO	1/100	1
1121-1M	8434067002080	12V / 230V	G5,3 / GU10	MATT WHITE / BLANCO MATE	1/100	1
1121-22	8434067000765	12V / 230V	G5,3 / GU10	MATT BLACK / NEGRO MATE	1/100	1
1121-01M	8434067183772	12V / 230V	G5,3 / GU10	WHITE-ALUM/ BLANCO-ALUMINIO	1/100	1
1121-02	8434067183789	12V / 230V	G5,3 / GU10	BLACK-ALUM/ NEGRO-ALUMINIO	1/100	1

• STIL K















Color Box
PACKING

MATERIAL DE PRODUCCION: **VIDRIO Y ALUMINIO**
PRODUCTION MATERIAL: **GLASS & ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.095 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1122-AL	8434067108768	12V / 230V	G5,3 / GU10	ALUMINIUM / ALUMINIO RAYADO	1/100	1
1122-1M	8434067001632	12V / 230V	G5,3 / GU10	MATT WHITE / BLANCO MATE	1/100	1
1122-22	8434067000772	12V / 230V	G5,3 / GU10	MATT BLACK / NEGRO MATE	1/100	1
1122-01M	8434067002851	12V / 230V	G5,3 / GU10	WHITE-ALUM/ BLANCO-ALUMINIO	1/100	1
1122-02	8434067183819	12V / 230V	G5,3 / GU10	BLACK-ALUM/ NEGRO-ALUMINIO	1/100	1

• TIPISCH R









Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**


Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.080 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1501-11	5206139300256	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1501-22	8434067182270	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1501-33	8434067109130	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1501-3V	8434067109147	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1501-55	8434067109154	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1501-5M	8434067109161	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
E.147-55627	5206139300270	12V / 230V	**G5,3 / GU10**	ANTIQUE COPPER / COBRE ENV.	1/100	1
1501-NS	8434067109185	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1
E.147-55625	5206139300256	12V / 230V	**G5,3 / GU10**	GOLD SATIN / ORO SATINADO	1/100	1

• TIPISCH K









Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**


Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.080 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1503-11	8434067110303	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1503-22	8434067183871	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1503-33	8434067110310	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1503-3V	8434067110327	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1503-55	8434067110334	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1503-5M	8434067110341	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1503-NS	8434067110365	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1



• OHIKO R







Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**


Ø65mm CUTTING DIAMETER | MAX WATT LED 7W | 0.045 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1502-01	8434067109666	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1502-02	8434067183864	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1502-03	8434067109673	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1502-3V	8434067109680	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1502-05	8434067109697	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1502-5M	8434067109703	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
E.147-55614	5206139300164	12V / 230V	**G5,3 / GU10**	ANTIQUE COPPER / COBRE ENV.	1/100	1
1502-NS	8434067109727	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1
E.147-55616	5206139300140	12V / 230V	**G5,3 / GU10**	GOLD SATIN / ORO SATINADO	1/100	1

• OHIKO K









Color Box
PACKING

MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

Ø65mm CUTTING DIAMETER | MAX WATT LED 7W | 0.045 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1504-01	8434067110808	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/100	1
1504-02	8434067183895	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1
1504-03	8434067110815	12V / 230V	**G5,3 / GU10**	GOLD / B. ORO	1/100	1
1504-3V	8434067110822	12V / 230V	**G5,3 / GU10**	ANTIQUE BRASS / ORO VIEJO	1/100	1
1504-05	8434067110839	12V / 230V	**G5,3 / GU10**	CHROME / CROMO	1/100	1
1504-5M	8434067110846	12V / 230V	**G5,3 / GU10**	MATT CHROME / CROMO MATE	1/100	1
1504-NS	8434067110860	12V / 230V	**G5,3 / GU10**	NICKEL SATIN/ NIQUEL SAT	1/100	1

• LIGNUM R

CEMENT EFFECT
EFECTO CEMENTO



PINE TREE
PINO






AGED WOOD
ENVEJECIDO



OAK
ROBLE



WALNUT
NOGAL



MATERIAL DE PRODUCCION: **MADDERA NATURAL**
PRODUCTION MATERIAL: **NATURAL WOOD**

Wood accessory for the Tipisch Model (Recessed ring not included)
Accesorio de madera para el modelo Tipisch (Aro empotrable no incluido)

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1501-M1	8434067183925	12V / 230V	**G5,3 / GU10**	AGED WOOD / ENVEJECIDO	1/100	1
1501-M2	8434067183932	12V / 230V	**G5,3 / GU10**	CEMENT EFFECT/ EFECTO CEMENTO	1/100	1
1501-M3	8434067183949	12V / 230V	**G5,3 / GU10**	PINE TREE / PINO	1/100	1
1501-M4	8434067183956	12V / 230V	**G5,3 / GU10**	OAK / ROBLE	1/100	1
1501-M5	8434067183963	12V / 230V	**G5,3 / GU10**	WALNUT / NOGAL	1/100	1

• LIGNUM R

AGED WOOD
ENVEJECIDO



PINE TREE
PINO






CEMENT EFFECT
EFECTO CEMENTO



OAK
ROBLE



WALNUT
NOGAL



MATERIAL DE PRODUCCION: **MADDERA NATURAL**
PRODUCTION MATERIAL: **NATURAL WOOD**

Wood accessory for the Tipisch Model (Recessed ring not included)
Accesorio de madera para el modelo Tipisch (Aro empotrable no incluido)

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1503-M1	8434067183970	12V / 230V	**G5,3 / GU10**	AGED WOOD / ENVEJECIDO	1/100	1
1503-M2	8434067183987	12V / 230V	**G5,3 / GU10**	CEMENT EFFECT/ EFECTO CEMENTO	1/100	1
1503-M3	8434067183994	12V / 230V	**G5,3 / GU10**	PINE TREE / PINO	1/100	1
1503-M4	8434067184007	12V / 230V	**G5,3 / GU10**	OAK / ROBLE	1/100	1
1503-M5	8434067184014	12V / 230V	**G5,3 / GU10**	WALNUT / NOGAL	1/100	1



• KOPPEL R

CEMENT EFFECT
EFECTO CEMENTO



PINE TREE
PINO






WALNUT
NOGAL



OAK
ROBLE



AGED WOOD
ENVEJECIDO



MATERIAL DE PRODUCCION: **MADERA NATURAL + ALUMINIO**
PRODUCTION MATERIAL: **NATURAL WOOD + ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.150 kg | IP20 | 2 YEARS GUARANTEE

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1508-M1	8434067184021	12V / 230V	**G5,3 / GU10**	AGED WOOD / ENVEJECIDO	1/100	1
1508-M2	8434067184038	12V / 230V	**G5,3 / GU10**	CEMENT EFFECT/ EFECTO CEMENTO	1/100	1
1508-M3	8434067184045	12V / 230V	**G5,3 / GU10**	PINE TREE / PINO	1/100	1
1508-M4	8434067184052	12V / 230V	**G5,3 / GU10**	OAK / ROBLE	1/100	1
1508-M5	8434067184069	12V / 230V	**G5,3 / GU10**	WALNUT / NOGAL	1/100	1

• KOPPEL K

CEMENT EFFECT
EFECTO CEMENTO



PINE TREE
PINO






OAK
ROBLE



AGED WOOD
ENVEJECIDO



WALNUT
NOGAL



MATERIAL DE PRODUCCION: **MADERA NATURAL + ALUMINIO**
PRODUCTION MATERIAL: **NATURAL WOOD + ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.185 kg | IP20 | 2 YEARS GUARANTEE


CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1509-M1	8434067184083	12V / 230V	**G5,3 / GU10**	AGED WOOD / ENVEJECIDO	1/100	1
1509-M2	8434067184090	12V / 230V	**G5,3 / GU10**	CEMENT EFFECT/ EFECTO CEMENTO	1/100	1
1509-M3	8434067184076	12V / 230V	**G5,3 / GU10**	PINE TREE / PINO	1/100	1
1509-M4	8434067184106	12V / 230V	**G5,3 / GU10**	OAK / ROBLE	1/100	1
1509-M5	8434067184113	12V / 230V	**G5,3 / GU10**	WALNUT / NOGAL	1/100	1

• TRUMPET R

*Portalámparas GU10 incluido







MATERIAL DE PRODUCCION: **CHAPA DE ACERO + ALUMINIO**
PRODUCTION MATERIAL: **SHEET STEEL + ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.155 kg | IP20 | 2 YEARS GUARANTEE


Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1523-1M	8434067005517	230V	**GU10***	MATT WHITE / BLANCO MATE	1/50	1
1523-02	8434067011532	230V	**GU10***	MATT BLACK / NEGRO MATE	1/50	1

• BATIC







MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.155 kg | IP20 | 2 YEARS GUARANTEE


Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1525-1M	8434067005647	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1525-02	8434067010887	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1

• VULKAN







MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

Ø95mm CUTTING DIAMETER | MAX WATT LED 7W | 0.195 kg | IP20 | 2 YEARS GUARANTEE



Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1526-1M	8434067005654	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1526-02	8434067015820	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1



• TRUMPET K





MATERIAL DE PRODUCCION: **CHAPA DE ACERO + ALUMINIO**
PRODUCTION MATERIAL: **SHEET STEEL + ALUMINIUM**


76x76mm CUTTING DIMENSION | MAX WATT LED 7W | 0.180 kg | IP20 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1524-1M	8434067005524	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/50	1

• SONK





MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**

Ø95mm CUTTING DIAMETER | MAX WATT LED 7W | 0.180 kg | IP20 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1527-1M	8434067003490	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/50	1


• STILVOLL

1528-1M



1529-1M



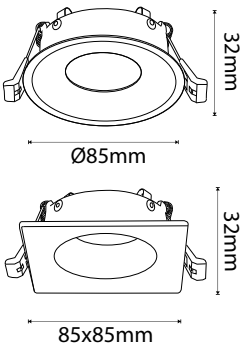

MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.115 kg | IP20 | 2 YEARS GUARANTEE


Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1528-1M	8434067118309	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/50	1
1529-1M	8434067118835	12V / 230V	**G5,3 / GU10**	WHITE / BLANCO	1/50	1

• CAMLARI R







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.120 kg | IP20 | 2 YEARS GUARANTEE




Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1530-11	8434067184199	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1530-22	8434067184205	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1

• CAMLARI K







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.135 kg | IP20 | 2 YEARS GUARANTEE




Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1531-11	8434067184212	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1531-22	8434067184229	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1

• NELIO







MATERIAL DE PRODUCCION: **FUNDICION DE ALUMINIO**
PRODUCTION MATERIAL: **DIECAST ALUMINIUM**

90x90mm CUTTING DIMENSION | MAX WATT LED 7W | 0.140 kg | IP20 | 2 YEARS GUARANTEE




Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1522-1M	8434067111584	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1/100	1
1522-22	8434067111591	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1/100	1



• DUETT





MATERIAL DE PRODUCCION: **CHAPA DE ACERO + ALUMINIO**
PRODUCTION MATERIAL: **SHEET STEEL + ALUMINIUM**

142x78mm CUTTING DIMENSION | MAX WATT LED 7W | 0.400 kg | IP20 | 2 YEARS GUARANTEE




Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1115-AL	8434067108669	12V / 230V	**G5,3 / GU10**	ALUMINIUM / ALUMINIO RAYADO	1/20	1

• ARTSI







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

91x91mm CUTTING DIMENSION | MAX WATT LED 7W | 0.300 kg | IP20 | 2 YEARS GUARANTEE




Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
TZ.V4208000	5415053202304	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1	1
TZ.V4208001	5415053202311	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1	1

• ARTSI 2







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

171x92mm CUTTING DIMENSION | MAX WATT LED 7W | 0.500 kg | IP20 | 2 YEARS GUARANTEE



Color Box
PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
TZ.V4208100	5415053202328	12V / 230V	**G5,3 / GU10**	MATT WHITE / BLANCO MATE	1	1
TZ.V4208101	5415053202335	12V / 230V	**G5,3 / GU10**	MATT BLACK / NEGRO MATE	1	1

• MADZI







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.140 kg | IP54 | 2 YEARS GUARANTEE



White Box with Sticker PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
E.147-52100	5207227019159	220-240V	GU10	WHITE	1/100	2
E.147-52101	5207227019173	220-240V	GU10	SATIN	1/100	2







MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

Ø75mm CUTTING DIAMETER | MAX WATT LED 7W | 0.165 kg | IP54 | 2 YEARS GUARANTEE



White Box with Sticker PACKING


CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
E.147-52110	5206139305107	220-240V	GU10	WHITE	1/100	2
E.147-52111	5206139305114	220-240V	GU10	SATIN	1/100	2





• SKAIDRUS R





MATERIAL DE PRODUCCION: **ALUMINIO + CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM + GLASS**


Ø60mm CUTTING DIAMETER | MAX WATT LED 7W | 0.335kg | IP20 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1036-TT	8434067105897	12V / 230V	**G5,3 / GU10**	TRANSPARENT / TRANSPARENTE	1/50	1

• SKAIDRUS K





MATERIAL DE PRODUCCION: **ALUMINIO + CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM + GLASS**

Ø60mm CUTTING DIAMETER | MAX WATT LED 7W | 0.335 kg | IP20 | 2 YEARS GUARANTEE

Color Box PACKING


CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1037-TT	8434067002349	12V / 230V	**G5,3 / GU10**	TRANSPARENT / TRANSPARENTE	1/50	1

• FURAN









MATERIAL DE PRODUCCION: **ALUMINIO + CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM + GLASS**

65x90mm CUTTING DIMENSION | MAX WATT LED 12W | 0.310 kg | IP20 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
1039-11	8434067106269	230V	**G9**	WHITE / BLANCO	1/50	1
1039-55	8434067106276	230V	**G9**	CHROME / CROMO	1/50	1
1039-NS	8434067106283	230V	**G9**	NIKEL SATIN / NIQUEL SATINADO	1/50	1

- EMPOTRABLES DE YESO
- PLASTER SPOTS

MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**

TYPE GU10 | MAX WATT LED 6W | OPERATING TEMPERATURE +70°C -20°C | IP20 | 3 YEARS GUARANTEE




White Box with Sticker
PACKING










CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53201	5207227067709	SPOT PLASTER SINGLE ROUND EMPOTRABLE DE YESO REDONDO	0.280Kg	1/30	1










CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53205	5207227067785	SPOT PLASTER SINGLE ROUND EMPOTRABLE DE YESO REDONDO	0.190Kg	1/30	1











CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53204	5207227067761	SPOT PLASTER SINGLE SQUARE EMPOTRABLE DE YESO CUADRADO	0.400Kg	1/30	1

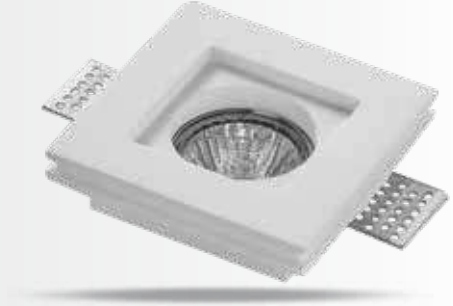







CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53200	5207227067686	SPOT PLASTER SINGLE SQUARE EMPOTRABLE DE YESO CUADRADO	0.300Kg	1/30	1




- EMPOTRABLES DE YESO
- PLASTER SPOTS


MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**

TYPE GU10 | MAX WATT LED 6W | OPERATING TEMPERATURE +70°C -20°C | IP20 | 3 YEARS GUARANTEE




White Box with Sticker
PACKING

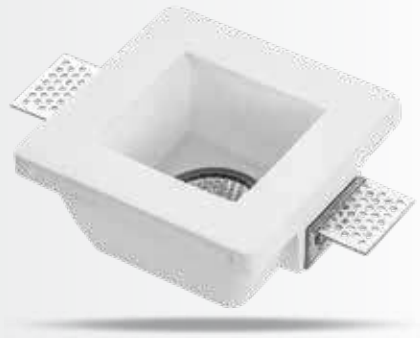




123x123mm
CUTTING DIMENSION




CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53202	5207227067723	SPOT PLASTER SINGLE SQUARE EMPOTRABLE DE YESO CUADRADO	0.620Kg	1/24	1

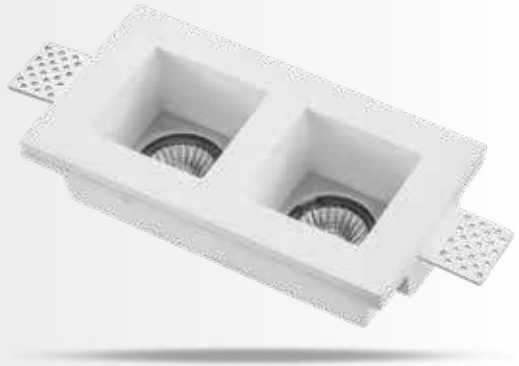




217x120mm
CUTTING DIMENSION




CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53203	5207227067747	SPOT PLASTER SINGLE SQUARE EMPOTRABLE DE YESO DOBLE CUADRADO	1.340Kg	1/12	1





253x138mm
CUTTING DIMENSION



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53206	5207227067808	SPOT PLASTER DOUBLE SQUARE INDIRECT LIGHTING EMPOTRABLE DE YESO DOBLE CUADRADO	1.590Kg	1/6	1

• GIMBAL AR111


MAX WATT LED 15W | IP20 | 2 YEARS GUARANTEE

White Box with Sticker PACKING

MATERIAL DE PRODUCCION: **CHAPA DE ACERO**
PRODUCTION MATERIAL: **SHEET STEEL**




8001

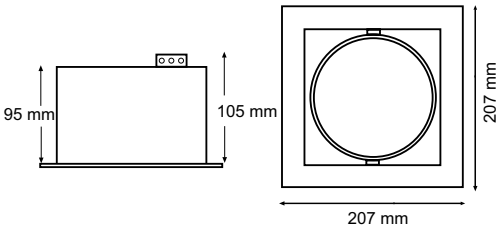

180x180mm CUTTING DIMENSION | 1.160 kg




8002

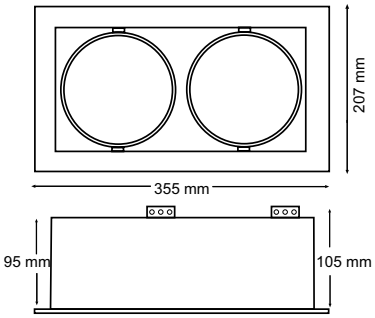

330x180mm CUTTING DIMENSION | 1.835 kg




8003

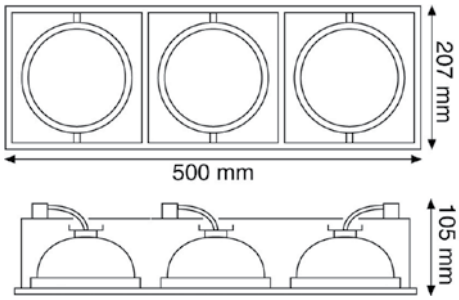

475x180mm CUTTING DIMENSION | 2.510 kg



8004




330x330mm CUTTING DIMENSION | 2.995 kg

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
8001-1M	8434067000512	12V / 230V	**1xG53 / GU10**	MATT WHITE / BLANCO MATE	1/12	1
8001-22	8434067010849	12V / 230V	**1xG53 / GU10**	MATT BLACK / NEGRO MATE	1/12	1
8001-GP	8434067169868	12V / 230V	**1xG53 / GU10**	SILVER GREY / GRIS PLATA	1/12	1
8002-1M	8434067000536	12V / 230V	**2xG53 / GU10**	MATT WHITE / BLANCO MATE	1/9	1
8002-22	8434067003209	12V / 230V	**2xG53 / GU10**	MATT BLACK / NEGRO MATE	1/9	1
8002-GP	8434067169882	12V / 230V	**2xG53 / GU10**	SILVER GREY / GRIS PLATA	1/9	1
8003-1M	8434067010900	12V / 230V	**3xG53 / GU10**	MATT WHITE / BLANCO MATE	1/9	1
8003-22	8434067004626	12V / 230V	**3xG53 / GU10**	MATT BLACK / NEGRO MATE	1/9	1
8003-GP	8434067169905	12V / 230V	**3xG53 / GU10**	SILVER GREY / GRIS PLATA	1/9	1
8004-GP	8434067169912	12V	**4xG53**	SILVER GREY / GRIS PLATA	1/6	1



• HLINIK

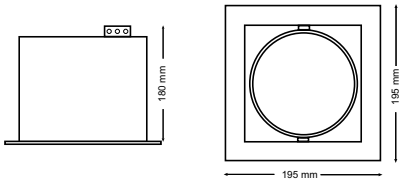

8051




165x165mm
CUTTING DIMENSION

8055



Ø170mm
CUTTING DIAMETER



MAX WATT LED 15W | 0.10 kg | IP20 | 2 YEARS GUARANTEE


MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

CODE	BARCODE	VOLT	TYPE	COLOR	WEIGHT	MOQ
8051-AL	8434067169929	12V / 230V	**G53 / GU10**	ALUMINIUM / ALUMINIO RAYADO	1.245Kg	1
8055-AL	8434067169967	12V / 230V	**G53 / GU10**	ALUMINIUM / ALUMINIO RAYADO	0.825Kg	1

• KLISI

8121-AL







8121-02



8121-1M

Ø160mm CUTTING DIAMETER | MAX WATT LED 15W | 0.275 kg | IP20 | 2 YEARS GUARANTEE

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

CODE	BARCODE	VOLT	TYPE	COLOR	PACKING	MOQ
8121-AL	8434067000604	12V / 230V	**G53 / GU10**	ALUMINIUM / ALUMINIO RAYADO	1/20	1
8121-1M	8434067002820	12V / 230V	**G53 / GU10**	WHITE-ALUM/ BLANCO-ALUMINIO	1/20	1
8121-02	8434067002875	12V / 230V	**G53 / GU10**	BLACK-ALUM/ NEGRO-ALUMINIO	1/20	1

• Iluminacion Profesional
Empotrables LED integrado

• Professional Lighting
Integrated LED spots light



Ideal para uso en:

- Historias
- Residencias
- Centros comerciales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Residences
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



• MINI GNOMON

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


PRO | mA 350 - 3W 500 - 5W | D ENERGY CLASS | DIMMABLE | BEAM ANGLE 60º | IP44 | 5 YEARS GUARANTEE


ON-OFF 40.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45ºC -10ºC

Disponible:

Available in: **3000**K (30)* **4000**K (40)*





Ø34mm CUTTING DIAMETER

CODE	WATT	KELVIN	LUMEN	WEIGHT	COLOR	MOQ
G9161.01.__*	3-5W	3/4*	426-577 lm	0.150kg	MATT WHITE/BLANCO MATE	1
G9161.03.__*	3-5W	3/4*	426-577 lm	0.150kg	MATT BLACK/NEGRO MATE	1
G9161.26.__*	3-5W	3/4*	426-577 lm	0.150kg	METALLIC GREY/GRIS METALICO	1

• ROYAL 3

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


PLUS | VOLT 12V | F ENERGY CLASS | DIMMABLE | BEAM ANGLE 120º | IP20 | 2 YEARS GUARANTEE

ON-OFF 20.000 | LIFETIME 20.000 hr | LED TYPE COB | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 1-2 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45ºC -10ºC

Disponible:

Available in: **3000**K







Ø25mm CUTTING DIAMETER

CODE	BARCODE	WATT	KELVIN	LUMEN	WEIGHT	COLOR	PACKING	MOQ
TZ.V4223200	5415053202830	1W	3000K	85 lm	0.050kg	WHITE/BLANCO	9	1

• STARLIGHT

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


PRO | mA 350 - 1.05W 500 - 1.50W 700 - 2.10W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE NICHIA | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 1-2 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C

Disponible:

Available in: **3000**K (30)* **4000**K (40)*




Ø33mm CUTTING DIAMETER | BEAM ANGLE 14° 28°- 44°

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9017.01.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT WHITE/BLANCO MATE	1
G9017.02.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT BLACK/NEGRO MATE	1
G9017.AL.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	ANODIZED/ANODIZADO	1




Ø33mm CUTTING DIAMETER | BEAM ANGLE 14° 28°- 44°

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9019.01.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT WHITE/BLANCO MATE	1
G9019.02.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT BLACK/NEGRO MATE	1
G9019.AL.__°.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	ANODIZED/ANODIZADO	1

G9016.R



G9016.K

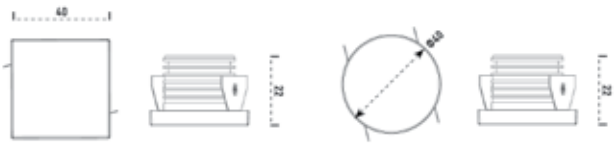Ø33mm CUTTING DIAMETER | BEAM ANGLE 120°

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9016.R.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MILKY / OPAL	1
G9016.K.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MILKY / OPAL	1



• STARLIGHT

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


PRO | mA 350 - 1.05W 500 - 1.50W 700 - 2.10W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE NICHIA | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 1-2 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C

Disponible:

Available in: **3000**K (30)* **4000**K (40)*





Ø32mm CUTTING DIAMETER | BEAM ANGLE 14º


CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9111.01.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT WHITE/BLANCO MATE	1
G9111.02.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	MATT BLACK/NEGRO MATE	1
G9111.AL.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	ANODIZED/ANODIZADO	1

G1152SQ.AL





G1152.AL



IP67 | Ø50mm CUTTING DIAMETER | BEAM ANGLE 14º 28º- 44º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G1152.AL.__º.__*	1.05-2.10W	3/4*	135 lm/watt	0.150kg	ANODIZED/ANODIZADO	1
G1152SQ.AL.__º__*	1.05-2.10W	3/4*	135 lm/watt	0.160kg	ANODIZED/ANODIZADO	1





• DRIVER STARLIGHT

CODE	W Driver	W Led	mA	OUTPUT VOLTAGE RANGE	DIMMING INTERFACE	UNITS IN SERIE	MOQ
GDR350	Max 4W	1,05W	350mA	3...6V	NOT DIMMABLE	1-2	1
GDR500	Max 6W	1,50W	500mA	3...6V	NOT DIMMABLE	1-2	1
GDR700	Max 7W	2,10W	700mA	5...10V	NOT DIMMABLE	1-2	1
87500802	Max 10W	1,05W	350mA	17...29V	NOT DIMMABLE	3-6	1
87500803	Max 10W	1,50W	500mA	11...20V	NOT DIMMABLE	3-6	1
87500804	Max 10W	2,10W	700mA	8...14,5V	NOT DIMMABLE	3-4	1

• GNOMON

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

PRO | mA 350 - 6,1W 700 - 8,9W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C


Disponible:

Available in: **3000**K (30)* **4000**K (40)*









Ø60mm CUTTING DIAMETER | BEAM ANGLE 90º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9160.01.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT WHITE/BLANCO MATE	1
G9160.03.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT BLACK/NEGRO MATE	1
G9160.26.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	METALLIC GREY / GRIS	1

• MINI VIRGO

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

PRO | mA 350 - 6,1W 700 - 8,9W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C


Disponible:

Available in: **3000**K (30)* **4000**K (40)*









Ø51mm CUTTING DIAMETER | BEAM ANGLE 20º 38º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9164.01.__º.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT WHITE/BLANCO MATE	1
G9164.03.__º.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT BLACK/NEGRO MATE	1
G9164.26.__º.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	METALLIC GREY / GRIS	1



• VIRGIN DARK

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**




Disponible:

Available in: **3000**K (30)* **4000**K (40)*








Ø80mm CUTTING DIAMETER — BEAM ANGLE 38º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9198.01.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT WHITE/BLANCO MATE	1
G9198.03.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT BLACK/NEGRO MATE	1
G9198.26.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	METALLIC GREY / GRIS	1

• VIRGIN ADJUSTABLE





Ø80mm CUTTING DIAMETER — BEAM ANGLE 38º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ	PRICE (€)
G9199.01.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT WHITE/BLANCO MATE	1	62,60 €
G9199.03.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	MATT BLACK/NEGRO MATE	1	62,60 €
G9199.26.__*	6,1-8,9W	30/40*	145 lm/watt	0.180kg	METALLIC GREY / GRIS	1	62,60 €

• DRIVER

CODE	W Driver	W Led	mA	OUTPUT VOLTAGE RANGE	DIMMING INTERFACE	UNITS IN SERIE	MOQ
87500802	Max 10W	6,1W	350mA	17...29V	NOT DIMMABLE	1	1
87500803	Max 10W	8,9W	500mA	11...20V	NOT DIMMABLE	1	1
87500274	Max 10W	6,1W	350mA	14...28V	TRIAC, 1-10V	1	1
87500275	Max 10W	8,9W	500mA	10...20V	TRIAC, 1-10V	1	1
28000673	Max 10W	6,1W	350mA	15...29V	DALI, SWITCHDIM	1	1
28000674	Max 17W	8,9W	500mA	15...34V	DALI, SWITCHDIM	1	1

• VIRGO

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

PRO | mA 250 - 8,7W 350 - 12,6W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE


ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C

Disponible:

Available in: **3000**K (30)* **4000**K (40)*








Ø82mm CUTTING DIAMETER | BEAM ANGLE 14º-40º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9165R.01.__º.30	6,1-8,9W	3000K	144 lm/watt	0.320kg	WHITE/BLANCO	1
G9165R.01.__º.40	6,1-8,9W	4000K	148 lm/watt	0.320kg	WHITE/BLANCO	1







82x82mm CUTTING DIMENSION | BEAM ANGLE 14º-40º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9165SQ.01.__º.30	6,1-8,9W	3000K	144 lm/watt	0.320kg	WHITE/BLANCO	1
G9165SQ.01.__º.40	6,1-8,9W	4000K	148 lm/watt	0.320kg	WHITE/BLANCO	1

• POINT

PRO | mA 250 - 8,7W 350 - 12,6W | D ENERGY CLASS | DIMMABLE | IP44 | 5 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 50.000 hr | LED TYPE BRIDGELUX | DRIVER NO INCLUDED | CRI >80 | START TIME 3 Sec | FLICKER FREE | CLASS III | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C


Disponible:

Available in: **3000**K (30)*









Ø13mm CUTTING DIAMETER | BEAM ANGLE 60º

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G9100.01.30	1W	3000K	120 lm/watt	0.040kg	WHITE/BLANCO	1
G9100.03.30	1W	3000K	120 lm/watt	0.040kg	BLACK/NEGRO	1



• SPOT LIGHT RECESSED

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

PLUS | VOLT 230V 50/60Hz | G ENERGY CLASS | AMPERAGE 250 mA | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE


ON-OFF 15.000 | LIFETIME 50,000 hr | LED TYPE COB CREE | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 1.200 kg | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C


White Box with Sticker PACKING

Disponible:

Available in: **4000**K





CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	DIMENSION	COLOR	PACKING	MOQ
E.145-59801	5207227151132	12W	4000K	85 lm/watt	100x100x84mm	WHITE/BLANCO	1/20	1
E.145-59802	5207227151149	12W	4000K	85 lm/watt	100x100x84mm	BLACK/NEGRO	1/20	1

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**

PRO | VOLT 220-240V 50/60Hz | E ENERGY CLASS | AMPERAGE 265 mA | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE


ON-OFF 10.000 | LIFETIME 25.000 hr | LED TYPE SMD 3030 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 0.500 kg | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C


White Box with Sticker PACKING

Disponible:

Available in: **4000**K




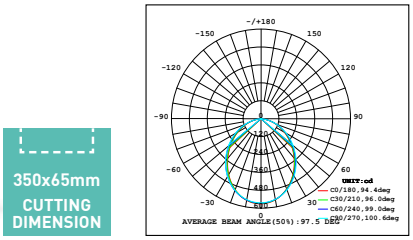

OLD CODE	NEW CODE	BARCODE	WATT	LUMEN / WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.145-55092	E.145-59800*	5207227061660	12W	90 lm/watt	361x40x85mm	WHITE/BLACK	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

• Iluminacion Profesional
Iluminacion interior de Yeso
• Professional Lighting
Plaster Lights Indoor Use

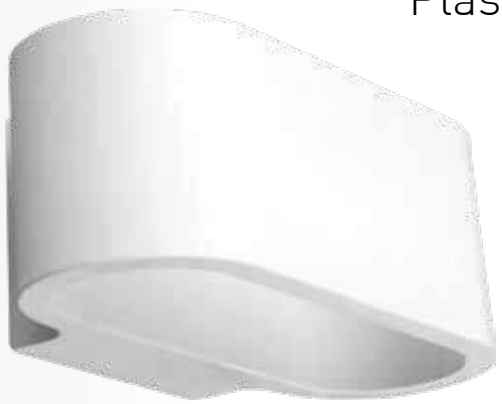



Ideal para uso en:

- Tiendas
- Residencias
- Centros comerciales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Residences
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



• EMPOTRABLES DE YESO DE PARED
• PLASTER SPOTS WALL

MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**





White Box with Sticker
PACKING


Disponible:

Available in: **3000**K











CODE	BARCODE	WATT	KELVIN	AMPERAGE	LUMEN / WATT	WEIGHT	PACKING	MOQ
E.147-53208	5207227067846	1W	3000K	350mA	**80** lm/watt	1.560kg	1/6	1

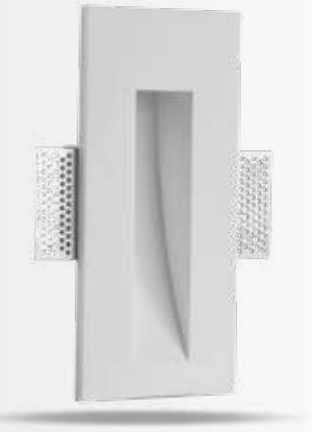









CODE	BARCODE	WATT	KELVIN	AMPERAGE	LUMEN / WATT	WEIGHT	PACKING	MOQ
E.147-53207	5207227067822	1W	3000K	350mA	**80** lm/watt	1.520kg	1/6	1



WALL LIGHT
ΑΠΛΙΚΑ ΤΟΙΧΟΥ







CODE	BARCODE	WATT	KELVIN	AMPERAGE	LUMEN / WATT	WEIGHT	PACKING	MOQ
E.147-53305	5207227067969	2x3W	3000K	300mA	**85** lm/watt	0.650kg	1/6	1

- APLIQUES DE PARED DE YESO
- PLASTER WALL LIGHTS


MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**

TYPE G9 | MAX WATT LED 6W | OPERATING TEMPERATURE +70°C -20°C | IP20 | 3 YEARS GUARANTEE


White Box with Sticker
PACKING









CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53300	5207227067860	WALL LIGHT OVAL MEDIUM APLIQUE DE PARED OVALADO MEDIUM	1.230Kg	1/12	1

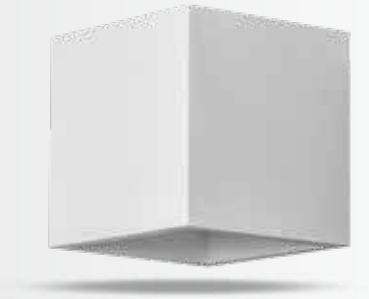






CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53301	5207227067884	WALL LIGHT CUBE APLIQUE DE PARED CUBE	1.510Kg	1/8	1

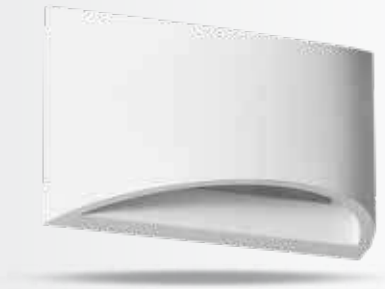







CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53302	5207227067907	WALL LIGHT OVAL MEDIUM APLIQUE DE PARED OVALADO MEDIUM	0.670Kg	1/6	1

x2

MAX WATT LED 6W

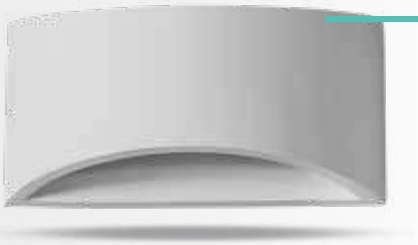





CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53303	5207227067921	WALL LIGHT OVAL LARGE APLIQUE DE PARED OVALADO LARGE	1.330Kg	1/6	1




• APLIQUES DE PARED DE YESO
• PLASTER WALL LIGHTS

MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**






White Box with Sticker
PACKING

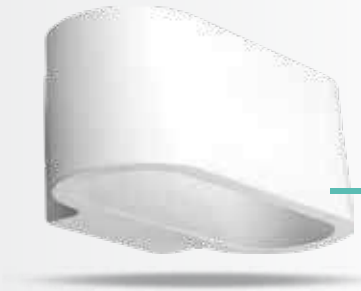


TYPE G9






CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53304	5207227067945	WALL LIGHT PLASTER OVAL SMALL APLIQUE DE PARED OVALADO SMALL	0.700Kg	1/8	1

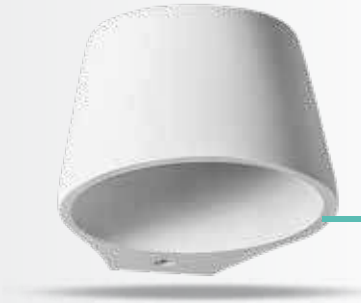

TYPE E14






CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53306	5207227067983	WALL LIGHT PLASTER ROUND Ø165mm APLIQUE DE PARED REDONDO Ø165mm	1.340Kg	1/8	1




TYPE E14






CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53307	5207227068003	WALL LIGHT PLASTER OVAL APLIQUE DE PARED OVALADO	1.390Kg	1/9	1

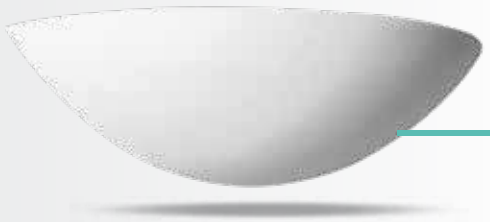

TYPE E14





CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53308	5207227068027	WALL LIGHT PLASTER OVAL APLIQUE DE PARED OVALADO	0.980Kg	1/6	1

- APLIQUES DE PARED DE YESO
- PLASTER WALL LIGHTS

MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**






White Box with Sticker
PACKING








CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53310	5207227068065	WALL LIGHT PLASTER UP-DOWN ROUND APLIQUE PARED REDONDO UP-DOWN	1.690Kg	1/6	1








CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53311	5207227068089	WALL LIGHT PLASTER UP-DOWN SQUARE APLIQUE PARED CUADRADO UP-DOWN	1.720Kg	1/6	1







CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53313	5207227068126	WALL LIGHT PLASTER UP-DOWN APLIQUE PARED RECTANGULAR UP-DOWN	1.710Kg	1/6	1



- APLIQUES DE PARED DE YESO
- PLASTER WALL LIGHTS

MATERIAL DE PRODUCCION: **YESO**
PRODUCTION MATERIAL: **PLASTER**

MAX WATT LED 6W | OPERATING TEMPERATURE +70°C -20°C | IP20 | 3 YEARS GUARANTEE




White Box with Sticker
PACKING




TYPE G9





CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53309	5207227068041	WALL LIGHT PLASTER OVAL PERFORATED APLIQUE DE PARED OVALADO PERFORADO	0.900Kg	1/8	1

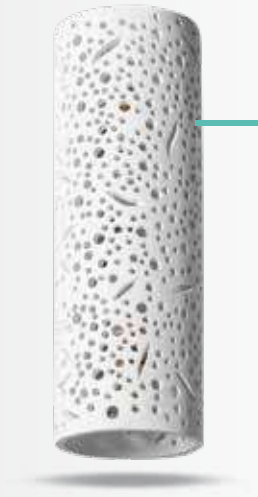


x2


MAX WATT LED 6W

TYPE E14






CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53312	5207227068102	WALL LIGHT PLASTER UP-DOWN PERFORATED APLIQUE DE PARED UP-DOWN PERFORADO	1.150Kg	1/6	1

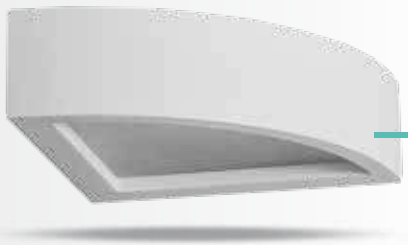

TYPE E14





CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-53314	5207227068140	WALL LIGHT PLASTER OVAL APLIQUE PARED OVALADO	1.410Kg	1/4	1

• Iluminacion Profesional
Carril Electrificado

• Professional Lighting
LED Track Lights







Ideal para uso en:

- Tiendas
- Residencias
- Centros comerciales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Residences
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



• CARRIL MAGNETICO / PROYECTORES
• MAGNETIC SPOT / TRACK LIGHTS

2023 dosmilveintitres

* Ideal para uso Comercial

* Ideal for Commercial use

- CARRIL MAGNETICO
- TRACK LIGHT ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 48V DC | OPERATING TEMPERATURE +45°C -20°C | IP20 | 5 YEARS GUARANTEE


PlasticBag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59900	5207227157165	CARRIL MAGNETICO EMPOTRADO 1m NEGRO RECESSED MAGNETIC TRACK 1m BLACK	1.200Kg	1/5	1
E.145-59901	5207227151590	CARRIL MAGNETICO EMPOTRADO 2m NEGRO RECESSED MAGNETIC TRACK 2m BLACK	2.400Kg	1/5	1
E.145-59902	5207227157172	CARRIL MAGNETICO SUPERFICIE/COLGANTE 1m NEGRO PENDANT & SURFACE MAGNETIC TRACK 1m BLACK	0.920Kg	1/9	1
E.145-59903	5207227151606	CARRIL MAGNETICO SUPERFICIE/COLGANTE 2m NEGRO PENDANT & SURFACE MAGNETIC TRACK 1m BLACK	1.850Kg	1/9	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59904	5207227151613	CONECTOR DE ALIMENTACION DE ENTRADA* INPUT POWER CONNECTOR FOR MAGNETIC TRACK*	0.080Kg	1/100	1
E.145-59905	5207227151620	CONECTOR DE ALIMENTACION FLEXIBLE PARA CARRIL FLEXIBLE POWER CONNECTOR FOR MAGNETIC TRACK BLACK	0.080Kg	1/100	1

*Requiere fuente de alimentacion 48V / Power 48V is required



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59907	5207227151637	DRIVER 100W 48V DC DE CARRIL MAGNETICO NEGRO DRIVER 100W 48V DC OF MAGNETIC TRACK BLACK	0.250Kg	1/50	1
E.145-59908	5207227151644	DRIVER 200W 48V DC DE CARRIL MAGNETICO NEGRO DRIVER 200W 48V DC OF MAGNETIC TRACK BLACK	0.370Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59910	5207227151651	ESQUINA EMPOTRADA PARA CARRIL MAGNETICO 90 STL-RLC01 RECESSED CORNER FOR MAGNETIC TRACK 90 STL-RLC01	0.120Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59911	5207227151668	ESQUINA EMPOTRADA PARA CARRIL MAGNÉTICO 90 STL-RLC02 RECESSED CORNER FOR MAGNETIC TRACK 90 STL-RLC02	0.120Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59912	5207227151675	ESQUINA EMPOTRADA PARA CARRIL MAGNÉTICO 90 STL-RLC03 RECESSED CORNER FOR MAGNETIC TRACK 90 STL-RLC03	0.120Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59913	5207227151682	ESQUINA SUPERFICE PARA CARRIL MAGNÉTICO 90 STL-SLC02 SURFACE CORNER FOR MAGNETIC TRACK 90 STL-SLC02 BLACK	0.120Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59914	5207227151699	ESQUINA SUPERFICE PARA CARRIL MAGNÉTICO 90 STL-SLC01 SURFACE CORNER FOR MAGNETIC TRACK 90 STL-SLC01 BLACK	0.120Kg	1/30	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59915	5207227151705	CONECTOR DE CARRIL MAGNÉTICO RECTO STL-RA CONJUCTION STRAIGHT RECESSED MAGNETIC TRACK STL-RA	0.010Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59916	5207227151712	CONECTOR DE CARRIL MAGNÉTICO RECTO STL-SA CONJUCTION STRAIGHT SURFACE MAGNETIC TRACK STL-SA	0.020Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59917	5207227151729	CABLE DE SUSPENSION CARRIL STL-SAB NEGRO SUSPENDING WIRE TRACK STL-SAB BLACK	0.150Kg	1/100	1



• PROYECTORES CARRIL MAGNETICO
• MAGNETIC TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

PLUS | VOLT 48V DC | F ENERGY CLASS | BEAM ANGLE 24° | IP20 | 3 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Brown Box with Sticker PACKING


Disponible:

Available in: **4000**K

E.145-59940



E.145-59941

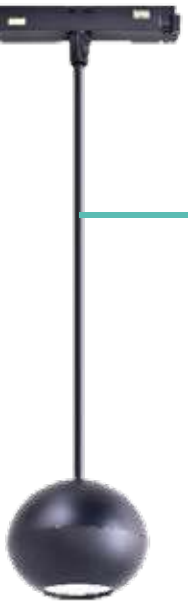

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	AMPERAGE	DIMENSION	WEIGHT	PACKING	MOQ
E.145-59940	5207227151576	10W	4000K	80 lm/watt	200mA	300x50x50mm	0.200 kg	1/30	1
E.145-59941	5207227151583	7W	4000K	80 lm/watt	150mA	110x22x40mm	0.240 kg	1/30	1

PLUS | VOLT 48V DC | F ENERGY CLASS | BEAM ANGLE 24° | IP20 | 3 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

Disponible:

Available in: **4000**K



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	AMPERAGE	DIMENSION	WEIGHT	PACKING	MOQ
E.145-59930	5207227151538	12W	4000K	80 lm/watt	250mA	145x50x50mm	0.340 kg	1/30	1
E.145-59931	5207227151545	18W	4000K	80 lm/watt	350mA	145x50x50mm	0.340 kg	1/30	1

- PROYECTORES CARRIL MAGNETICO
- MAGNETIC TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

NEW PRODUCT

PLUS | VOLT 48V DC | F ENERGY CLASS | BEAM ANGLE 24° | IP20 | 3 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C

White Box with Sticker PACKING

Disponible:

Available in: **4000**K

E.145-59932



E.145-59933



CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	AMPERAGE	DIMENSION	WEIGHT	PACKING	MOQ
E.145-59932	5207227151552	6W	4000K	80 lm/watt	150mA	115x24x135mm	0.230 kg	1/30	1
E.145-59933	5207227151569	12W	4000K	80 lm/watt	250mA	230x24x135mm	0.450 kg	1/30	1

- PROYECTORES CARRIL MAGNETICO LINEALES
- LINEAR MAGNETIC TRACK LIGHT

NEW PRODUCT

PLUS | VOLT 48V DC | F ENERGY CLASS | BEAM ANGLE 110° | IP20 | 3 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C

White Box with Sticker PACKING


Disponible:

Available in: **4000**K

E.145-59950



E.145-59952
E.145-59953

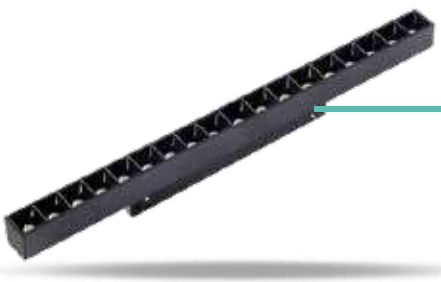

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	AMPERAGE	DIMENSION	WEIGHT	PACKING	MOQ
E.145-59950	5207227151507	20W	4000K	80 lm/watt	400mA	600x22x40mm	0.300 kg	1/50	1
E.145-59952	5207227151514	18W	4000K	80 lm/watt	350mA	320x22x40mm	0.180 kg	1/50	1
E.145-59953	5207227151521	24W	4000K	80 lm/watt	500mA	433x22x40mm	0.240 kg	1/50	1



- PROYECTORES LED DE CARRIL
- LED TRACK LIGHT

- CARRIL TRIFASICO EMPOTRAR / ACCESORIOS
- RECESSED TRACK LIGHT ACCESSORIES

LINES 4

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 100-265V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE

PlasticBag PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59240	5207227151330	CARRIL TRIFASICO EMPOTRADO 1m BLANCO RAIL RECESSED 4 LINES 1m WHITE	0.910Kg	1/8	1
E.145-59241	5207227151347	CARRIL TRIFASICO EMPOTRADO 2m BLANCO RECESSED 4 LINES 2m WHITE	1.860Kg	1/8	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59242	5207227151354	ALIMENTACION CARRIL EMPOTRADO TRIFASICO BL ΛΕΥΚΗ POWER RAIL RECESSED 4 LINES 220V WHITE	0.060Kg	1/50	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59243	5207227151361	UNION INTERIOR CARRIL TRIFASICO BLANCO CONJUCTION RAIL RECESSED 4 LINES STRAIGHT	0.025Kg	1/500	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59245	5207227151378	UNION ESQUINA CARRIL TRIFASICO 90º BLANCO EMP CONJUCTION RAIL RECESSED 4 LINES ANGLE 90º	0.110Kg	1/50	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59246	5207227151385	UNION TIPO "T" CARRIL TRIFASICO BLANCO EMPO CONJUCTION RAIL RECESSED 4 LINES TYPE "T" WHITE	0.163Kg	1/25	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59247	5207227151392	UNION TIPO CRUZ CARRIL TRIFASICO BLANCO EMPO CONJUCTION RAIL RECESSED 4 LINES TYPE "CROSS"	0.210Kg	1/25	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59248	5207227151408	UNION LINEAL VISTA CARRIL TRIFASICO EMP BLANCO RAIL RECESSED 4 LINES TERMINAL WHITE	0.008Kg	1/500	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59249	5207227151415	SOPORTE PARA EMPOTRAR CARRIL TRIFASICO ACCESSORIE SUPPORTING FOR RECESSED RAIL 4 LINES	0.010Kg	1/500	1



LINES 4

CARRIL TRIFASICO EMPOTRAR / ACCESORIOS
• RECESSED TRACK LIGHT ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 100-265V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE


PlasticBag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59250	5207227151422	CARRIL TRIFASICO EMPOTRADO 1m NEGRO RECESSED 4 LINES 1m BLACK	0.910Kg	1/8	1
E.145-59251	5207227151439	CARRIL TRIFASICO EMPOTRADO 2m NEGRO RAIL RECESSED 4 LINES 2m BLACK	1.860Kg	1/8	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59252	5207227151446	ALIMENTACION CARRIL EMPOTRADO TRIFASICO NEGRO POWER RAIL RECESSED 4 LINES 220V BLACK	0.060Kg	1/50	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59253	5207227151453	UNION INTERIOR CARRIL TRIFASICO NEGRO CONJUCTION RAIL RECESSED 4 LINES STRAIGHT	0.025Kg	1/500	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59255	5207227151460	UNION ESQUINA CARRIL TRIFASICO 90º NEGRO EMP CONJUCTION RAIL RECESSED 4 LINES ANGLE 90º	0.110Kg	1/50	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59256	5207227151477	UNION TIPO "T" CARRIL TRIFASICO NEGRO EMPO CONJUCTION RAIL RECESSED 4 LINES TYPE "T" BLACK	0.163Kg	1/25	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59257	5207227151484	UNION TIPO CRUZ CARRIL TRIFASICO NEGRO EMPO CONJUCTION RAIL RECESSED 4 LINES TYPE "CROSS"	0.210Kg	1/25	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59258	5207227151491	UNION LINEAL VISTA CARRIL TRIFASICO EMP NEGRO RAIL RECESSED 4 LINES TERMINAL BLACK	0.008Kg	1/500	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59249	5207227151415	SOPORTE PARA EMPOTRAR CARRIL TRIFASICO ACCESSORIE SUPPORTING FOR RECESSED RAIL 4 LINES	0.010Kg	1/500	1

- CARRIL TRIFASICO SUPERFICIE / ACCESORIOS
- SURFACE TRACK LIGHT ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

LINES 4

EUROLAMP®
Pioneers in New Technology !

VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 5 YEARS GUARANTEE



PlasticBag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55160	5206139087461	CARRIL TRIFASICO SUPERFICE 1m BLANCO RAIL UNIVERSAL 1m WHITE	0.820Kg	1/20	1
E.145-55162	5206139087614	CARRIL TRIFASICO SUPERFICE 2m BLANCO RAIL UNIVERSAL 2m WHITE	1.642Kg	1/10	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55164	5206139087393	ALIMENTACION CARRIL SUPERFICIE TRIFASICO BL POWER RAIL UNIVERSAL WHITE	0.057Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55166	5206139087430	UNION INTERIOR CARRIL TRIFASICO BLANCO CONJUCTION RAIL UNIVERSAL STRAIGHT WHITE	0.028Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55168	5206139087607	UNION FLEXIBLE CARRIL TRIFASICO BLANCO SUP FLEXIBLE L-SHAPE CONJUCTION RAIL UNIVERSAL WHITE	0.135Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55170	5206139088383	UNION ESQUINA CARRIL TRIFASICO 90º BLANCO SUP CONJUCTION RAIL UNIVERSAL ANGLE 90° WHITE	0.104Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55172	5206139088406	UNION TIPO CRUZ CARRIL TRIFASICO BLANCO SUP CONJUCTION RAIL UNIVERSAL TYPE "CROSS" WHITE	0.194Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55174	5206139088482	UNION ESPIRAL CARRIL TRIFASICO BLANCO SUP CONJUCTION RAIL UNIVERSAL SPIRAL ANGLE WHITE	0.135Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55176	5206139088581	UNION TIPO "T" CARRIL TRIFASICO BLANCO SUP CONJUCTION RAIL UNIVERSAL TYPE "T" WHITE	0.147Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55180	5207227071973	ADAPTADOR DE CARRIL TRIFASICO PARA CABLE BLANCO ADAPTOR RAIL FOR WIRE WHITE	0.075Kg	1/100	1
E.145-59212	5207227158537	ADAPTADOR DE CARRIL TRIFASICO PARA CABLE 2m BLANCO ADAPTOR RAIL 4 WIRE WITH WIRE 2m WHITE	0.075Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55178	5206139088604	TAPA FINAL PARA CARRIL TRIFASICO BLANCO RAIL UNIVERSAL TERMINAL WHITE	0.011Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70786	5207227017445	SOPORTE PARA MONTAJE SUPERFICIE EXTERNAL FITTING FOOT BASE ALUMINUM A5075	0.001Kg	1/1000	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70788	5207227017483	CABLE SUSPENSION A5075 SUSPENDING WIRE PENDANT INSTALLATION A5075	0.050Kg	1/400	1

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59211	5207227153983	CABLE SUSPENSION CON ROSETON 2m SUSPENDING WIRE FOR LIGHT FIXTURE WITH ROSETTE 2m (4P)	0.050Kg	1/400	1



LINES 4

CARRIL TRIFASICO SUPERFICIE / ACCESORIOS
• SURFACE TRACK LIGHT ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 5 YEARS GUARANTEE


PlasticBag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55161	5206139087485	CARRIL TRIFASICO SUPERFICE 1m NEGRO RAIL UNIVERSAL 1m BLACK	0.820Kg	1/20	1
E.145-55163	5206139087386	CARRIL TRIFASICO SUPERFICE 2m NEGRO RAIL UNIVERSAL 2m BLACK	1.642Kg	1/10	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55165	5206139087423	ALIMENTACION CARRIL SUPERFICIE TRIFASICO NEGRO POWER RAIL UNIVERSAL BLACK	0.028Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55167	5206139087492	UNION INTERIOR CARRIL TRIFASICO NEGRO CONJUCTION RAIL UNIVERSAL STRAIGHT BLACK	0.057Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55169	5206139087645	UNION FLEXIBLE CARRIL TRIFASICO NEGRO SUP FLEXIBLE L-SHAPE CONJUCTION RAIL UNIVERSAL BLACK	0.135Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55171	5206139088390	UNION ESQUINA CARRIL TRIFASICO 90º NEGRO SUP CONJUCTION RAIL UNIVERSAL ANGLE 90° BLACK	0.104Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55173	5206139088444	UNION TIPO CRUZ CARRIL TRIFASICO NEGRO SUP CONJUCTION RAIL UNIVERSAL TYPE "CROSS" BLACK	0.194Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55175	5206139088567	UNION ESPIRAL CARRIL TRIFASICO NEGRO SUP CONJUCTION RAIL UNIVERSAL SPIRAL ANGLE BLACK	0.135Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55177	5206139088598	UNION TIPO "T" CARRIL TRIFASICO NEGRO SUP CONJUCTION RAIL UNIVERSAL TYPE "T" BLACK	0.147Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55181	5207227071980	ADAPTADOR DE CARRIL TRIFASICO PARA CABLE NEGRO ADAPTOR RAIL FOR WIRE BLACK	0.075Kg	1/100	1
E.145-59232	5207227158551	ADAPTADOR DE CARRIL TRIFASICO PARA CABLE 2m NEGRO ADAPTOR RAIL 4 WIRE WITH WIRE 2m BLACK	0.075Kg	1/100	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55179	5206139088628	TAPA FINAL PARA CARRIL TRIFASICO NEGRO RAIL UNIVERSAL TERMINAL BLACK	0.011Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70786	5207227017445	SOPORTE PARA MONTAJE SUPERFICIE EXTERNAL FITTING FOOT BASE ALUMINUM A5075	0.001Kg	1/1000	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-70788	5207227017483	CABLE SUSPENSION A5075 SUSPENDING WIRE PENDANT INSTALLATION A5075	0.050Kg	1/400	1

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-59231	5207227153990	CABLE SUSPENSION CON ROSETON 2m SUSPENDING WIRE FOR LIGHT FIXTURE WITH ROSETTE 2m (4P)	0.050Kg	1/400	1

- CARRIL TRIFASICO SUPERFICIE / ACCESORIOS
- SURFACE TRACK LIGHT ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

LINES 4


GLOBAL trac®



VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE


CODE	BARCODE	L	COLOR	PACKING	MOQ
XTS4100-1	6410014500566	**1000mm**	GREY / GRIS	4/240	1
XTS4100-2	6410014506018	**1000mm**	BLACK / NEGRO	4/240	1
XTS4100-3	6410014507060	**1000mm**	WHITE / BLANCO	4/240	1
XTS4200-1	6410014500887	**2000mm**	GREY / GRIS	4/240	1
XTS4200-2	6410014506025	**2000mm**	BLACK / NEGRO	4/240	1
XTS4200-3	6410014507077	**2000mm**	WHITE / BLANCO	4/240	1
XTS4300-1	6410014500856	**3000mm**	GREY / GRIS	4/240	1
XTS4300-2	6410014506032	**3000mm**	BLACK / NEGRO	4/240	1
XTS4300-3	6410014507084	**3000mm**	WHITE / BLANCO	4/240	1

- POLARIDAD EN TRAC PRO
- POLARITY IN TRAC PRO

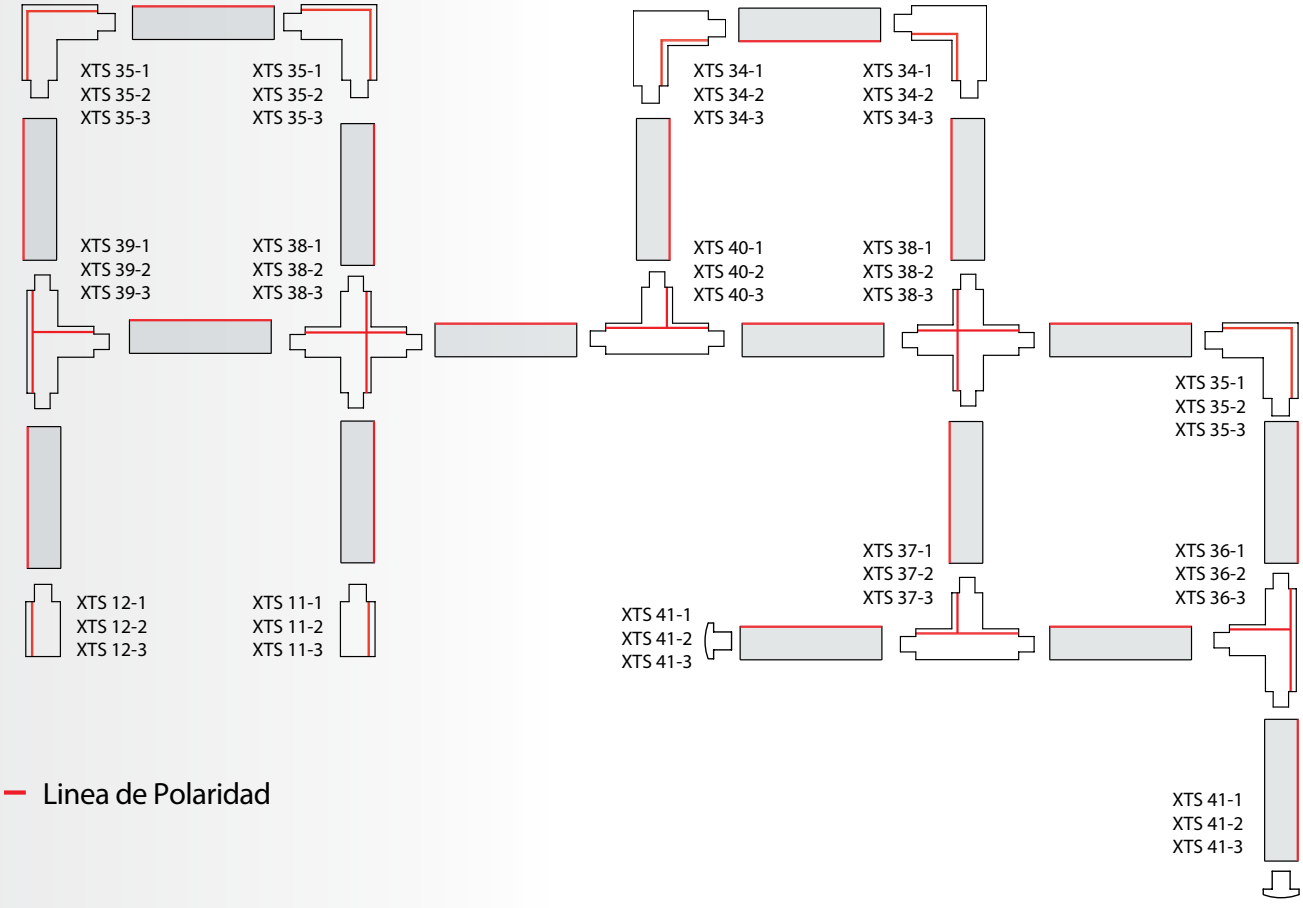


— Linea de Polaridad

FIX-POINT CONECTOR FOCO DE CARRIL



CODE	BARCODE		COLOR	PACKING	MOQ
GA70-1	6410014530921	SOPORTE DE SUPERFICIE PARA FOCO CARRIL 100x32 mm	GREY / GRIS	1/50	1
GA70-2	6410014520939		BLACK / NEGRO	1/50	1
GA70-3	6410014530938		WHITE / BLANCO	1/50	1




CODE	BARCODE		COLOR	PACKING	MOQ
XTSA71-1	6410014530976	CAJA DE EMPOTRAR GA70. CORTE Ø105-114mm	GREY / GRIS	1/25	1
XTSA71-2	6410014530960		BLACK / NEGRO	1/25	1
XTSA71-3	6410014520969		WHITE / BLANCO	1/25	1




CONECTORES CON OPCION DE ALIMENTACION
CONNECTORS WITH POWER SUPPLY OPTION

End feed XTS 11,12
1. 105 mm, 2. 66 mm




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS11-1	6410014507152		GREY / GRIS	1/100	1
XTS11-2	6410014506117		BLACK / NEGRO	1/100	1
XTS11-3	6410014507114		WHITE / BLANCO	1/100	1
XTS12-1	6410014507169		GREY / GRIS	1/100	1
XTS12-2	6410014506124		BLACK / NEGRO	1/100	1
XTS12-3	6410014507121		WHITE / BLANCO	1/100	1

L-feed XTS 34,35
1. 99 mm, 2. 66 mm




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS34-1	6410014507251		GREY / GRIS	1/25	1
XTS34-2	6410014506346		BLACK / NEGRO	1/25	1
XTS34-3	6410014507343		WHITE / BLANCO	1/25	1
XTS35-1	6410014507268		GREY / GRIS	1/25	1
XTS35-2	6410014506353		BLACK / NEGRO	1/25	1
XTS35-3	6410014507350		WHITE / BLANCO	1/25	1

T-feed XTS 36,37,39,40
1. 166 mm, 2. 100 mm 3. 34 mm
4. 67 mm 5. 66 mm 6. 99 mm




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS36-1	6410014507275		GREY / GRIS	1/25	1
XTS36-2	6410014506391		BLACK / NEGRO	1/25	1
XTS36-3	6410014507398		WHITE / BLANCO	1/25	1
XTS37-1	6410014507312		GREY / GRIS	1/25	1
XTS37-2	6410014506407		BLACK / NEGRO	1/25	1
XTS37-3	6410014507404		WHITE / BLANCO	1/25	1

T-feed XTS 36,37,39,40
1. 166 mm, 2. 100 mm 3. 34 mm
4. 67 mm 5. 66 mm 6. 99 mm




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS39-1	6410014507306		GREY / GRIS	1/25	1
XTS39-2	6410014506360		BLACK / NEGRO	1/25	1
XTS39-3	6410014507367		WHITE / BLANCO	1/25	1
XTS40-1	6410014507282		GREY / GRIS	1/25	1
XTS40-2	6410014506377		BLACK / NEGRO	1/25	1
XTS40-3	6410014507374		WHITE / BLANCO	1/25	1

Middle feed XTS 14
1. 166 mm,
2. 100 mm



CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS14-1	6410014500566		GREY / GRIS	1/50	1
XTS14-2	6410014506018		BLACK / NEGRO	1/50	1
XTS14-3	6410014507060		WHITE / BLANCO	1/50	1


X-feed XTS 38
1. 34 mm, 2. 100 mm, 3. 166 mm



CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS38-1	6410014507299		GREY / GRIS	1/25	1
XTS38-2	6410014506384		BLACK / NEGRO	1/25	1
XTS38-3	6410014507381		WHITE / BLANCO	1/25	1


CONECTORES SIN OPCION DE ALIMENTACION
CONNECTORS WITOUT POWER SUPPLY OPTION

Straight connector
XTS 21
1. 68 mm




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS21-1	6410014507176		GREY / GRIS	1/100	1
XTS21-2	6410014506148		BLACK / NEGRO	1/100	1
XTS21-3	6410014507145		WHITE / BLANCO	1/100	1

Flexible corner connector
1. 248 mm, 2. 182 mm,
3. 82 mm, 4. 50 mm
XTS 23




CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS23-1	6410014507206		GREY / GRIS	1/25	1
XTS23-2	6410014506230		BLACK / NEGRO	1/25	1
XTS23-3	6410014507237		WHITE / BLANCO	1/25	1

Adjustable corner connector
1. 226 mm, 2. 160 mm,
3. 60 mm, 4. 50 mm
XTS 24



CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS24-1	6410014507190		GREY / GRIS	1/25	1
XTS24-2	6410014506247		BLACK / NEGRO	1/25	1
XTS24-3	6410014507244		WHITE / BLANCO	1/25	1

End cap XTS 41
1. 3 mm, 2. 21 mm



CODE	BARCODE	POLARITY	COLOR	PACKING	MOQ
XTS41-1	6410014500566		GREY / GRIS	1/100	1
XTS41-2	6410014506018		BLACK / NEGRO	1/100	1
XTS41-3	6410014507060		WHITE / BLANCO	1/100	1



CODE	BARCODE	CABLE 3M	COLOR	PACKING	MOQ
SPW11K-1/3M	6410014500566		GREY / GRIS	1/100	1
SPW11K-2/3M	6410014506018		BLACK / NEGRO	1/100	1
SPW11K-3/3M	6410014507060		WHITE / BLANCO	1/100	1

- PROYECTORES LED DE CARRIL TRIFASICO
- LED TRACK LIGHT


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

Disponible:
Available in: **3000**K **4000**K

Ø75x160mm

LINES 4





PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | AMPERAGE 220 mA | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 15.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C




White Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55000	E.145-59300*	5206139009227	20W	4000K	85 lm/watt	0.650kg	WHITE	1/24	1
E.145-55001	E.145-59301*	5207227061554	20W	4000K	85 lm/watt	0.650kg	BLACK	1/24	1
E.145-55007	E.145-59302*	5207227061585	20W	3000K	85 lm/watt	0.650kg	WHITE	1/20	1
E.145-55008	E.145-59303*	5207227061608	20W	3000K	85 lm/watt	0.650kg	BLACK	1/20	1

Ø84x160mm

LINES 4





PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | AMPERAGE 300 mA | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 15.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55002	E.145-59304*	5207227061585	30W	4000K	85 lm/watt	0.840kg	WHITE	1/20	1
E.145-55003	E.145-59305*	5207227061608	30W	4000K	85 lm/watt	0.840kg	BLACK	1/20	1
E.145-55009	E.145-59306*	5207227159022	30W	3000K	85 lm/watt	0.840kg	WHITE	1/20	1
E.145-55010	E.145-59307*	5207227159046	30W	3000K	85 lm/watt	0.840kg	BLACK	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



• PROYECTORES LED DE CARRIL TRIFASICO
• LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


Disponible:
Available in: **4000**K

∅100x196x156.5mm

LINES 4







PLUS | VOLT 100-265V 50/60Hz | ENERGY CLASS F | AMPERAGE 700 mA | NOT DIMMABLE | BEAM ANGLE 38° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | INSTALLATION HEIGHT 3-5 m | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55034	E.145-59315*	5207227013850	30W	4000K	90 lm/watt	0.900kg	WHITE	1/10	1
E.145-55035	E.145-59316*	5207227013874	30W	4000K	90 lm/watt	0.900kg	BLACK	1/10	1

∅100x150x210mm

LINES 4







PLUS | VOLT 170-265V 50/60Hz | ENERGY CLASS F | AMPERAGE 270 mA | NOT DIMMABLE | BEAM ANGLE 35° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | INSTALLATION HEIGHT 3-4 m | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55004	E.145-59310*	5207227067365	30W	4000K	85 lm/watt	1.250kg	WHITE	1/12	1
E.145-55005	E.145-59311*	5207227067457	30W	4000K	85 lm/watt	1.250kg	BLACK	1/12	1

- PROYECTORES LED DE CARRIL TRIFASICO
- LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

Disponible:

Available in: **3000**K **4000**K

Ø196x196x173mm

LINES 4



PLUS | VOLT 230V 50/60Hz | G ENERGY CLASS | AMPERAGE 450 mA | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-59400	5207227150999	18W	4000K	85 lm/watt	1.450kg	WHITE	1/20	1
E.145-59401	5207227151002	18W	4000K	85 lm/watt	1.450kg	BLACK	1/20	1
E.145-59402	5207227151019	18W	3000K	85 lm/watt	1.450kg	WHITE	1/20	1
E.145-59403	5207227151026	18W	3000K	85 lm/watt	1.450kg	BLACK	1/20	1

Ø196x196x131mm

LINES 4



PLUS | VOLT 230V 50/60Hz | G ENERGY CLASS | AMPERAGE 450 mA | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-59404	5207227151033	18W	4000K	85 lm/watt	1.700kg	WHITE	1/16	1
E.145-59405	5207227151040	18W	4000K	85 lm/watt	1.700kg	BLACK	1/16	1
E.145-59406	5207227151057	18W	3000K	85 lm/watt	1.700kg	WHITE	1/16	1
E.145-59407	5207227151064	18W	3000K	85 lm/watt	1.700kg	BLACK	1/16	1




- PROYECTORES LED DE CARRIL TRIFASICO
- LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**







∅160x160x89mm

LINES 4

PLUS

VOLT 230V 50/60Hz | G ENERGY CLASS | AMPERAGE 450 mA | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-59408	5207227151071	18W	4000K	85 lm/watt	1.630kg	WHITE	1/20	1
E.145-59409	5207227151088	18W	4000K	85 lm/watt	1.630kg	BLACK	1/20	1
E.145-59410	5207227151095	18W	3000K	85 lm/watt	1.630kg	WHITE	1/20	1
E.145-59411	5207227151101	18W	3000K	85 lm/watt	1.630kg	BLACK	1/20	1



- PROYECTORES LED DE CARRIL TRIFASICO
- LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


Disponible:
Available in: **3000**K **4000**K

Ø90x260mm

LINES 4







PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | AMPERAGE 700 mA | NOT DIMMABLE | BEAM ANGLE 38° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15000 | LIFETIME 25.000 hr | LED TYPE COB 1919 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55044	E.145-59312*	5207227016042	30W	4000K	90 lm/watt	0.900kg	WHITE	1/15	1
E.145-55045	E.145-59313*	5207227016066	30W	4000K	90 lm/watt	0.900kg	BLACK	1/15	1

PRODUCTION MATERIAL: **METALLIC**
MATERIAL DE PRODUCCION: **METALICO**



Ø233x83x83mm



White Box with Sticker PACKING


OLD CODE	NEW CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55046	E.145-59314*	5207227016080	BLIND FOR SPOT LIGHT E.145-55044 / 55045 BLACK PARA REFERENCIA E.145-55044 / 55045 NEGRO	0.340Kg	1/30	1

PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**
MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**



Ø120x200x150mm

LINES 4



PLUS | MAX WATT LED 15W | 0.650 kg | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE



Color Box PACKING

OLD CODE	NEW CODE	BARCODE	TYPE	COLOR	PACKING	MOQ
E.145-55032	E.145-59380*	5206139079398	E27 / PAR30	BLACK / NEGRO	1/24	1
E.145-55033	E.145-59381*	5206139079381	E27 / PAR30	WHITE / BLANCO	1/24	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



• PROYECTORES LED DE CARRIL TRIFASICO
• LED TRACK LIGHT


MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**










LINES 4





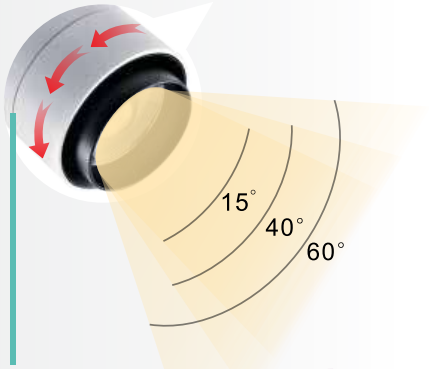

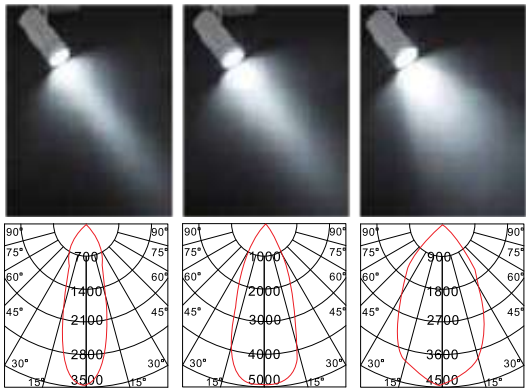

WITH ADJUSTABLE LIGHT ANGLE

CON HAZ DE LUZ AJUSTABLE

PRO

VOLT	F	AMPERAGE		BEAM ANGLE		
220-240V 50/60Hz	ENERGY CLASS	700 mA	NOT DIMMABLE	20°-60°	IP20	2 YEARS GUARANTEE

ON-OFF	LIFETIME	LED TYPE	PF	CRI	START TIME	INSTALLATION HEIGHT	OPERATING TEMPERATURE
10000	30.000 hr	COB 1919	>0.90	>80	0.5 Sec	5m	+45°C -20°C



White Box with Sticker
PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55030*	E.145-59350	5207227071997	30W	3000/4000/6000K	90 lm/watt	0.950kg	WHITE	1/8	1
E.145-55031*	E.145-59351	5207227072000	30W	3000/4000/6000K	90 lm/watt	0.950kg	BLACK	1/15	1



- PROYECTORES LED DE CARRIL TRIFASICO LINEALES
- LINEAR LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**

Disponible:
Available in: **4000**K

LINES 4

567x42x63mm
E.145-59602
E.145-59603



1122x42x63mm
E.145-59604
E.145-59605

PRO | VOLT 230V 50/60Hz | G ENERGY CLASS | AMPERAGE 600 mA | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-59602	5207227151170	24W	4000K	85 lm/watt	1.600kg	WHITE	1/10	1
E.145-59603	5207227151187	24W	4000K	85 lm/watt	1.600kg	BLACK	1/10	1
E.145-59604	5207227151194	48W	4000K	85 lm/watt	3.200kg	WHITE	1/8	1
E.145-59605	5207227151200	48W	4000K	85 lm/watt	3.200kg	BLACK	1/8	1





• PROYECTORES LED DE CARRIL TRIFASICO LINEALES
• LINEAR LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**




LINES 4

E.145-55090



E.145-55091





495x33x58mm

PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | AMPERAGE 60 mA 100 mA* | NOT DIMMABLE | IP20 | 2 YEARS GUARANTEE

ON-OFF 10000 | LIFETIME 25,000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



White Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	BEAM ANGLE	LUMEN/WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55090	E.145-59600*	5207227061622	15W	4000K	24°	90 lm/watt	0.425 kg	WHITE/BLACK	1/20	1
E.145-55091*	E.145-59601*	5207227061646	20W	4000K	100°	90 lm/watt	0.480 kg	WHITE	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



- CARRIL MONOFASICO / ACCESORIOS
- RAIL UNIVERSAL & ACCESSORIES

LINES 2

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 5 YEARS GUARANTEE



Nylon Bag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55130	5206139079671	CARRIL MONOFASICO 1m BLANCO RAIL UNIVERSAL 2 LINES 1m WHITE	0.455Kg	1/20	1
E.145-55132	5206139079695	CARRIL MONOFASICO 2m BLANCO RAIL UNIVERSAL 2 LINES 1m WHITE	0.630Kg	1/20	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55134	5206139079718	ALIMENTACION CARRIL MONOFASICO BLANCO POWER RAIL UNIVERSAL 2 LINES 220V WHITE	0.052Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55136	5206139079732	UNION INTERIOR CARRIL MONOFASICO BLANCO CONJUCTION RAIL UNIVERSAL STRAIGHT WHITE	0.027Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55138	5206139079756	UNION 90º CARRIL MONOFASICO BLANCO 90° CONJUCTION RAIL UNIVERSAL ANGLE 90° WHITE	0.027Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55140	5206139079855	UNION EN CRUZ CARRIL MONOFASICO BLANCO CONJUCTION RAIL UNIVERSAL 2 LINES TYPE "CROSS"	0.040Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55144	5206139079893	UNION TIPO "T" CARRIL MONOFASICO BLANCO CONJUCTION RAIL UNIVERSAL TYPE "T" WHITE	0.033Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55142	5206139079879	UNION ESPIRAL CARRIL MONOFASICO BLANCO CONJUCTION RAIL UNIVERSAL SPIRAL ANGLE WHITE	0.113Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55146	5206139079916	TAPA FINAL PARA CARRIL MONOFASICO BLANCO RAIL UNIVERSAL TERMINAL WHITE	0.006Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55148	5207227124211	SOPORTE EN SUSPENSION 2m BLANCO SUSPENDING WIRE FOR FIXTURE & ROSETTE 2m WHITE	0.210Kg	1/300	1



LINES
2

• CARRIL MONOFASICO / ACCESORIOS
• RAIL UNIVERSAL & ACCESSORIES

MATERIAL DE PRODUCCION: **ALUMINIO & PVC**
PRODUCTION MATERIAL: **ALUMINIUM & PVC**

VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C | IP20 | 5 YEARS GUARANTEE



Nylon Bag
PACKING



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55131	5206139079688	CARRIL MONOFASICO 1m NEGRO RAIL UNIVERSAL 2 LINES 1m BLACK	0.455Kg	1/20	1
E.145-55133	5206139079701	CARRIL MONOFASICO 2m NEGRO RAIL UNIVERSAL 2 LINES 2m BLACK	0.630Kg	1/20	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55135	5206139079725	ALIMENTACION CARRIL MONOFASICO NEGRO RAIL UNIVERSAL 2 LINES 2m BLACK	0.052Kg	1/300	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55137	5206139079749	UNION INTERIOR CARRIL MONOFASICO NEGRO CONJUCTION RAIL UNIVERSAL 2 LINES STRAIGHT BLACK	0.027Kg	1/200	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55139	5206139079763	UNION 90º CARRIL MONOFASICO NEGRO CONJUCTION RAIL UNIVERSAL ANGLE 90° BLACK	0.027Kg	1/20	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55141	5206139079862	UNION EN CRUZ CARRIL MONOFASICO NEGRO CONJUCTION RAIL UNIVERSAL TYPE "CROSS" BLACK	0.040Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55145	5206139079909	UNION TIPO "T" CARRIL MONOFASICO NEGRO CONJUCTION RAIL UNIVERSAL TYPE "T" BLACK	0.033Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55143	5206139079886	UNION ESPIRAL CARRIL MONOFASICO NEGRO CONJUCTION RAIL UNIVERSAL SPIRAL ANGLE BLACK	0.113Kg	1/1	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55147	5206139079923	TAPA FINAL PARA CARRIL MONOFASICO NEGRO RAIL UNIVERSAL TERMINAL BLACK	0.006Kg	1/1000	1



CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.145-55149	5207227124228	SOPORTE EN SUSPENSION 2m NEGRO SUSPENDING WIRE FOR FIXTURE & ROSETTE 2m BLACK	0.210Kg	1/300	1

- PROYECTORES CARRIL MONOFASICO
- LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


Disponible:

Available in: **4000**K

Ø70x160mm

LINES 2





PLUS | VOLT 100-265V 50/60Hz | ENERGY CLASS F | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 15.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | INSTALLATION HEIGHT 3-5 m | OPERATING TEMPERATURE +45°C -20°C




Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55082	E.145-59050*	5207227123948	20W	4000K	90 lm/watt	0.480kg	WHITE	1/24	1
E.145-55083	E.145-59051*	5207227123955	20W	4000K	90 lm/watt	0.480kg	BLACK	1/24	1
	E.145-59052*	5207227158407	20W	3000K	90 lm/watt	0.480kg	WHITE	1/24	1
	E.145-59053*	5207227158414	20W	3000K	90 lm/watt	0.480kg	BLACK	1/24	1

Ø80x180mm

LINES 2





PLUS | VOLT 100-265V 50/60Hz | ENERGY CLASS F | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 15.000 hr | LED TYPE COB 1919 | PF >0.50 | CRI >80 | START TIME 1 Sec | FLICKER FREE | INSTALLATION HEIGHT 3-5 m | OPERATING TEMPERATURE +45°C -20°C



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55084	E.145-59054*	5207227123962	30W	4000K	90 lm/watt	0.720kg	WHITE	1/20	1
E.145-55085	E.145-59055*	5207227123979	30W	4000K	90 lm/watt	0.720kg	BLACK	1/20	1
	E.145-59056*	5207227158421	30W	3000K	90 lm/watt	0.720kg	WHITE	1/20	1
	E.145-59057*	5207227158438	30W	3000K	90 lm/watt	0.720kg	BLACK	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



• PROYECTORES CARRIL MONOFASICO
• LED TRACK LIGHT


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

Disponible:
Available in: **4000**K

100x100x100mm

LINES 2





PLUS | VOLT 170-265V 50/60Hz | ENERGY CLASS F | NOT DIMMABLE | BEAM ANGLE 35° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | FLICKER FREE | INSTALLATION HEIGHT 3-4 m | OPERATING TEMPERATURE +45°C -20°C



Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55080	E.145-59046*	5207227067471	20W	4000K	85 lm/watt	1.450 kg	WHITE	1/20	1
E.145-55081	E.145-59047*	5207227067495	20W	4000K	85 lm/watt	1.450 kg	BLACK	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES


MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

Ø53x180mm

LINES 2







TYPE GU10 | MAX WATT LED 7W | INSTALLATION HEIGHT 2-3 m | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	TYPE	WEIGHT	COLOR	PACKING	MOQ
E.145-59075	5207227151118	GU10	0.850kg	WHITE / BLANCO	1/20	1
E.145-59085	5207227151125	GU10	0.850kg	BLACK / NEGRO	1/20	1

- PROYECTORES CARRIL MONOFASICO
- LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

TYPE GU10 | MAX WATT LED 7W | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE




White Box with Sticker
PACKING

∅34x120x55.5mm

LINES 2






OLD CODE	NEW CODE	BARCODE	WEIGHT	COLOR	PACKING	MOQ
E.145-55050	E.145-59070*	5206139079565	0.148Kg	WHITE / BLANCO	1/50	1
E.145-55060	E.145-59080*	5207227008450	0.148Kg	BLACK / NEGRO	1/50	1

34x120x55.5mm

LINES 2






OLD CODE	NEW CODE	BARCODE	WEIGHT	COLOR	PACKING	MOQ
E.145-55051	E.145-59071*	5206139079541	0.148Kg	WHITE / BLANCO	1/100	1
E.145-55061	E.145-59081*	5207227008474	0.148Kg	BLACK / NEGRO	1/100	1

35x190x55.5mm

LINES 2



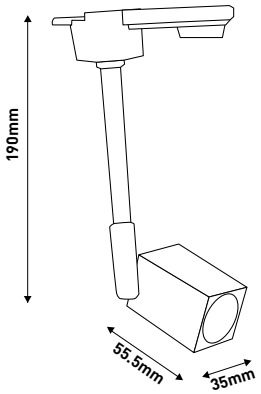

OLD CODE	NEW CODE	BARCODE	WEIGHT	COLOR	PACKING	MOQ
E.145-55052	E.145-55072*	5206139079558	0.211Kg	WHITE / BLANCO	1/20	1
E.145-55062	E.145-55082*	5207227008498	0.211Kg	BLACK / NEGRO	1/20	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES



• PROYECTORES CARRIL MONOFASICO
• LED TRACK LIGHT

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

LINES 2


TYPE GU10 | MAX WATT LED 7W | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C | IP20 | 2 YEARS GUARANTEE



White Box with Sticker PACKING




Ø42x110mm





Ø60x100mm



OLD CODE	NEW CODE	BARCODE	WEIGHT	COLOR	PACKING	MOQ
E.145-55054	E.145-59074*	5207227065798	0.275Kg	WHITE / BLANCO	1/24	1
E.145-55064	E.145-59084*	5207227065828	0.275Kg	BLACK / NEGRO	1/24	1
E.145-55053	E.145-59073*	5207227065774	0.278Kg	WHITE / BLANCO	1/24	1
E.145-55063	E.145-59083*	5207227065811	0.278Kg	BLACK / NEGRO	1/24	1

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**



Ø55x300mm

LINES 2

PLUS | VOLT 100-265V 50/60Hz | F ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 15.000 hr | LED TYPE RNS 1350 | PF >0.50 | CRI >80 | START TIME 01 Sec | FLICKER FREE | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C




Brown Box with Sticker PACKING

OLD CODE	NEW CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-55086	E.145-59040*	5207227123924	10W	4000K	90 lm/watt	0.520kg	WHITE	1/24	1
E.145-55087	E.145-59041*	5207227123931	10W	4000K	90 lm/watt	0.520kg	BLACK	1/24	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

- Spots Superficie LED
- LED Ceiling Spots



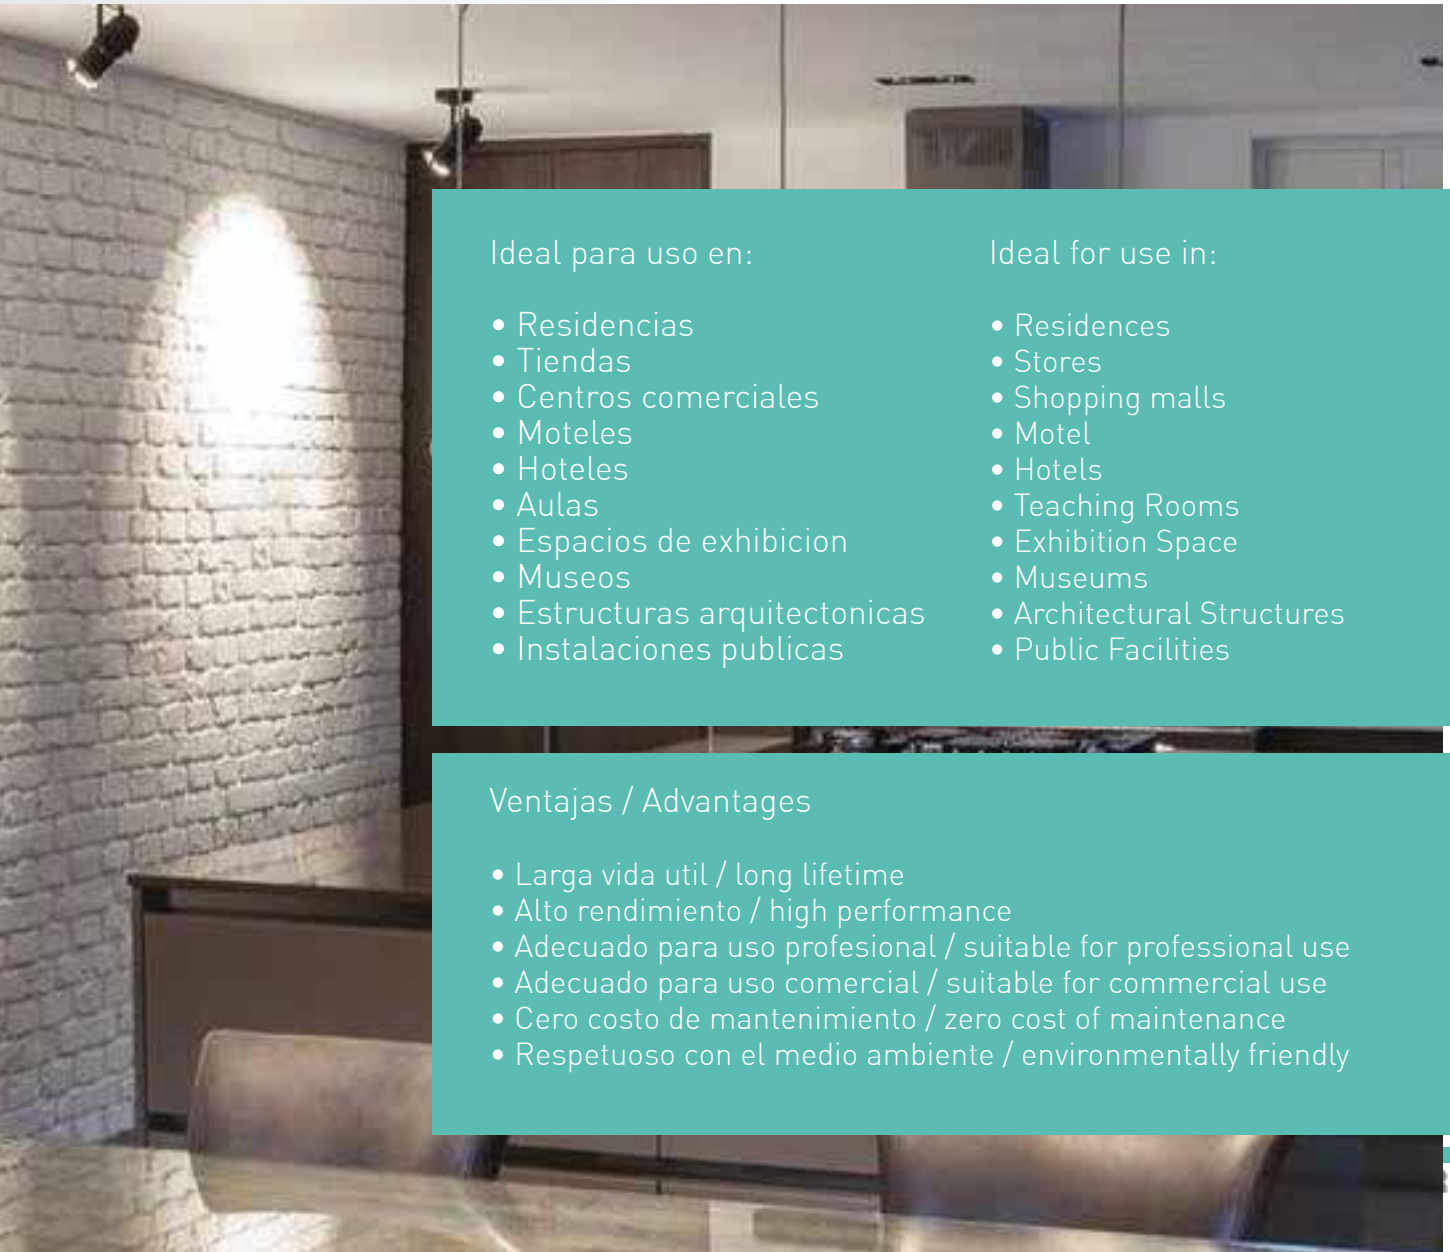

Ideal para uso en:

- Residencias
- Tiendas
- Centros comerciales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso profesional / suitable for professional use
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly




- APLIQUE DE PARED MOVIBLE
- WALL LIGHTS MOVABLE

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

NEW PRODUCT


E.145-20222





E.145-20223





PLUS | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 110° 93° * | IP54 | 2 YEARS GUARANTEE

LUMENS 53lm/w 43.5lm/w* | ON-OFF 25.000 | LIFETIME 25.000 hr | LED TYPE COB 1304 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C


Color Box PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20222	5207227150623	6W	3000K	140x140x60mm	0.680Kg	BLANCO / WHITE	1/20	1
E.145-20223*	5207227150630	6W	3000K	140x140x60mm	0.480Kg	BLANCO / WHITE	1/20	1

NEW PRODUCT

E.145-20224



E.145-20225



PLUS | VOLT 85-265V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 5° x4 face | IP44 | 3 YEARS GUARANTEE

LUMENS 50lm/w 60lm/w* | ON-OFF 12.500 | LIFETIME 50.000 hr | LED TYPE CREE | PF >0.50 | CRI >80 | START TIME 0.2 Sec | IK06 | CLASS II | GROUNDING | OPERATING TEMPERATURE +50°C -20°C


Color Box PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20224	5207227157929	12W	3000K	Ø140x140x45mm	0.700Kg	BLANCO / WHITE	1/1	1
E.145-20225	5207227157943	12W	3000K	140x140x45mm	0.800Kg	BLANCO / WHITE	1/1	1

• APLIQUE DE PARED LED
• WALL MOUNTED LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

E.145-20226

F ENERGY CLASS





G ENERGY CLASS

E.145-20227

PLUS | VOLT 85-265V 50/60Hz | IP65 | 3 YEARS GUARANTEE

LUMENS 80lm/w 43.5lm/w* | ON-OFF 12.500 | LIFETIME 50,000 hr | LED TYPE CREE | PF >0.50 | CRI >80 | START TIME 0.2 Sec | IK06 | CLASS II | GROUNDING | OPERATING TEMPERATURE +50°C -20°C



Color Box PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	BEAM ANGLE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20226	5207227157967	8W	6°x4 face	3000K	140x140x60mm	0.800Kg	BLANCO / WHITE	1/1	1
E.145-20227*	5207227157981	8W	270°	3000K	140x140x60mm	1.000Kg	BLANCO / WHITE	1/1	1

• SPOTS SUPERFICIE MOVIBLE
• SURFACE MOVEABLE SPOTS


MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

E.145-25210
E.145-25211





E.145-25212
E.145-20213



PLUS | VOLT 220-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 25° | IP20 | 2 YEARS GUARANTEE

LUMENS 65lm/w | ON-OFF 15.000 | LIFETIME 20,000 hr | LED TYPE COB | PF >0.50 | CRI >70 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +40°C -10°C



White Box with Sticker PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-25210	5207227072208	3W	3000K	ø75X120mm	0.230Kg	BLANCO / WHITE	1/50	1
E.145-25211	5207227072222	3W	3000K	ø75X120mm	0.230Kg	NEGRO / BLACK	1/50	1
E.145-25212	5207227072246	3W	3000K	ø75X135mm	0.210Kg	BLANCO / WHITE	1/50	1
E.145-25213	5207227072260	3W	3000K	ø75X135mm	0.210Kg	NEGRO / BLACK	1/50	1




• SPOTS SUPERFICIE MOVIBLE
• CEILING MOVEABLE SPOTS

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**

53x53x180mm





PLUS | TYPE GU10 | VOLT 230V 50/60Hz | G ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 24° | IP20 | 2 YEARS GUARANTEE


ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C


White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	PACKING	MOQ
E.145-59058	5207227067327	12W	4000K	85 lm/watt	1.200 kg	BLANCO / WHITE	1/20	1
E.145-59059	5207227067341	12W	4000K	85 lm/watt	1.200 kg	NEGRO / BLACK	1/20	1

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**





PLUS | VOLT 170-265V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 90° | IP20 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS II | 3-4 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -10°C


White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-25206	5207227067327	15W	4000K	ø80x110mm	2.270Kg	BLANCO / WHITE	1/50	1
E.145-25207	5207227067341	15W	4000K	ø80x110mm	2.270Kg	NEGRO / BLACK	1/50	1

- SPOTS SUPERFICIE GU10 "BASIS"
- CEILING LIGHT GU10 "BASIS"


MATERIAL DE PRODUCCION: **PC & ABS**
PRODUCTION MATERIAL: **PC & ABS**




White Box with Sticker PACKING








CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
E.145-25023	**5207227123221**	ø80x125mm	BLANCO / WHITE	0.145Kg	1/50	1
E.145-25024	**5207227123245**	ø80x125mm	NEGRO / BLACK	0.145Kg	1/50	1








CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
E.145-25025	**5207227123276**	80x80x125mm	BLANCO / WHITE	0.165Kg	1/50	1
E.145-25026	**5207227123290**	80x80x125mm	NEGRO / BLACK	0.165Kg	1/50	1

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**







CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
E.145-25027	**5207227123313**	ø59.5x197mm	BLANCO / WHITE	0.443Kg	1/20	1
E.145-25028	**5207227123337**	ø59.5x197mm	NEGRO / BLACK	0.443Kg	1/20	1



• SPOTS SUPERFICIE GU10 "SALKA"
• CEILING LIGHT GU10 "SALKA"

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**




White Box with Sticker PACKING



1123-AL 1123-1M1M 1123-22 1123-01M 1123-02

CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
1123-AL	8434067108850	ø94x90mm	ALUMINIO / ALUMINIUM	0.435Kg	1/20	1
1123-1M1M	8434067014557	ø94x90mm	BLANCO MATE / MATT WHITE	0.435Kg	1/20	1
1123-22	8434067120128	ø94x90mm	NEGRO MATE / MATT BLACK	0.435Kg	1/20	1
1123-01M	8434067002059	ø94x90mm	BLANCO-ALUM / WHITE-ALUM	0.435Kg	1/20	1
1123-02	8434067003193	ø94x90mm	NEGRO-ALUM / BLACK-ALUM	0.435Kg	1/20	1



1124-AL 1124-1M1M 1124-22 1124-01M 1124-02

CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
1124-AL	8434067108874	94x94x90mm	ALUMINIO / ALUMINIUM	0.745Kg	1/20	1
1124-1M1M	8434067012768	94x94x90mm	BLANCO MATE / MATT WHITE	0.745Kg	1/20	1
1124-22	8434067183833	94x94x90mm	NEGRO MATE / MATT BLACK	0.745Kg	1/20	1
1124-01M	8434067002059	94x94x90mm	BLANCO-ALUM / WHITE-ALUM	0.745Kg	1/20	1
1124-02	8434067003179	94x94x90mm	NEGRO-ALUM / BLACK-ALUM	0.745Kg	1/20	1

• NOBBY



CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
TZ.V4157100	5415053185638	ø63x158mm	BLANCO / WHITE	0.400Kg	1/20	1
TZ.V4157101	5415053185645	ø63x158mm	NEGRO / BLACK	0.400Kg	1/20	1

• SPOTS SUPERFICIE GU10 "CYLINDER 7C"
• CEILING LIGHT GU10 "CYLINDER 7C"

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

TYPE GU10 | MAX WATT LED 7W | OPERATING TEMPERATURE +50°C -20°C | IP20 | 2 YEARS GUARANTEE


White Box with Sticker PACKING






CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
G1110-01	8434067184274	ø70x90mm	BLANCO / WHITE	0.260Kg	1/20	1
G1110-02	8434067184281	ø70x90mm	NEGRO / BLACK	0.260Kg	1/20	1
G1110-26	8434067184298	ø70x90mm	GRIS / GREY METALLIC	0.260Kg	1/20	1

• TETRAGON 7C







CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
G1320-01	8434067013598	70x70x80mm	BLANCO / WHITE	0.260Kg	1/20	1
G1320-02	8434067014571	70x70x80mm	NEGRO / BLACK	0.260Kg	1/20	1
G1320-26	8434067014588	70x70x80mm	GRIS / GREY METALLIC	0.260Kg	1/20	1

• NESTOR 2



PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 38° | IP20 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 25.000 | LIFETIME 35.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | 3-4 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -10°C


White Box with Sticker PACKING


CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
TZ.V4214400	5415053201239	ø83x180mm	BLANCO / WHITE	0.750Kg	1/12	1
TZ.V4214401	5415053201246	ø83x180mm	NEGRO / BLACK	0.750Kg	1/12	1
TZ.V4214402	5415053201253	ø83x180mm	DORADO / GOLD	0.750Kg	1/12	1



• SPOTS SUPERFICIE MOVIBLE
• CEILING LIGHTS / WALL LIGHT SPOT

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**





PLUS | VOLT 170-265V 50/60Hz | ENERGY CLASS E | BEAM ANGLE 35° | IP20 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 50.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK08 | FLICKER FREE | CLASS II | 3-4 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -10°C


White Box with Sticker PACKING

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-25200	5207227067204	10W	4000K	ø60X160mm	1.190Kg	BLANCO / WHITE	1/40	1
E.145-25201	5207227067228	10W	4000K	ø60X160mm	1.190Kg	NEGRO / BLACK	1/40	1
E.145-25202	5207227067242	18W	4000K	ø80X192mm	1.390Kg	BLANCO / WHITE	1/30	1
E.145-25203	5207227067266	18W	4000K	ø80X192mm	1.390Kg	NEGRO / BLACK	1/30	1

• GU10


E.145-25019
E.145-25020


E.145-25021
E.145-25022


E.145-25017
E.145-25018

TYPE GU10 | MAX WATT LED 7W | OPERATING TEMPERATURE +50°C -20°C | IP20 | 2 YEARS GUARANTEE


White Box with Sticker PACKING

CODE	BARCODE	DIMENSIONS	COLOR	WEIGHT	PACKING	MOQ
E.145-25019	5207227066115	ø60x120x135mm	BLANCO / WHITE	0.370Kg	1/20	1
E.145-25020	5207227066139	ø60x120x135mm	NEGRO / BLACK	0.370Kg	1/20	1
E.145-25021	5207227066153	60x120x135mm	BLANCO / WHITE	0.505Kg	1/20	1
E.145-25022	5207227066177	60x120x135mm	NEGRO / BLACK	0.505Kg	1/20	1
E.145-25017	5207227066078	ø70x160mm	BLANCO / WHITE	0.340Kg	1/30	1
E.145-25018	5207227066092	ø70x160mm	NEGRO / BLACK	0.340Kg	1/30	1

- COLGANTES / PANTALLAS
- HANGING LIGHTS / LAMPSHADES

SIROS

MATERIAL DE PRODUCCION: **METALICO**
PRODUCTION MATERIAL: **METALLIC**



NylonBag
PACKING

CODE	BARCODE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.153-56200	5206139073969	**ø300x50mm**	0.401 kg	NEGRO / BLACK	1/20	1
E.153-56201	5206139073976	**ø300x50mm**	0.457 kg	PLATA / SILVER	1/20	1
E.153-56202	5206139073983	**ø360x160mm**	0.700kg	NEGRO / BLACK	1/20	1
E.153-56203	5206139074003	**ø360x160mm**	0.700kg	BRONCE / BRONZE	1/20	1
E.153-56204	5206139074010	**ø360x100mm**	0.627 kg	BLANCO MATE/MATT WHITE	1/20	1
E.153-56205	5206139074027	**ø360x100mm**	0.610 kg	NEGRO MATE/MATT BLACK	1/20	1

- PORTALAMPARAS CON 1m DE CABLE/ LAMPHOLDERS WIRE 1M

MATERIAL DE PRODUCCION: **METALICO, PLASTICO & COBRE**
PRODUCTION MATERIAL: **METALLIC, PLASTIC & COPPER**





PVC Box
with Sticker
PACKING

CODE	BARCODE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-23150	5207227055645	ø10x1000mm	0.190Kg	VERDE-GRIS / GREEN-BEIGE	1/50	1
E.147-23151	5207227055652	ø10x1000mm	0.190Kg	ROJO-GRIS / RED-GREY	1/50	1
E.147-23152	5207227055669	ø10x1000mm	0.190Kg	BLANCO-NEGRO / WHITE-BLACK	1/50	1
E.147-23153	5207227055676	ø10x1000mm	0.190Kg	GRIS-BLANCO / GREY-WHITE	1/50	1

TARIFA PVP


- COLGANTE "FLOPPY"
- HANGING CEILING LIGHTS "FLOPPY"

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**


TYPE GU10 | MAX WATT LED 7W | OPERATING TEMPERATURE +50°C -20°C | IP20 | 2 YEARS GUARANTEE

White Box with Sticker PACKING


E.145-25504
E.145-25505

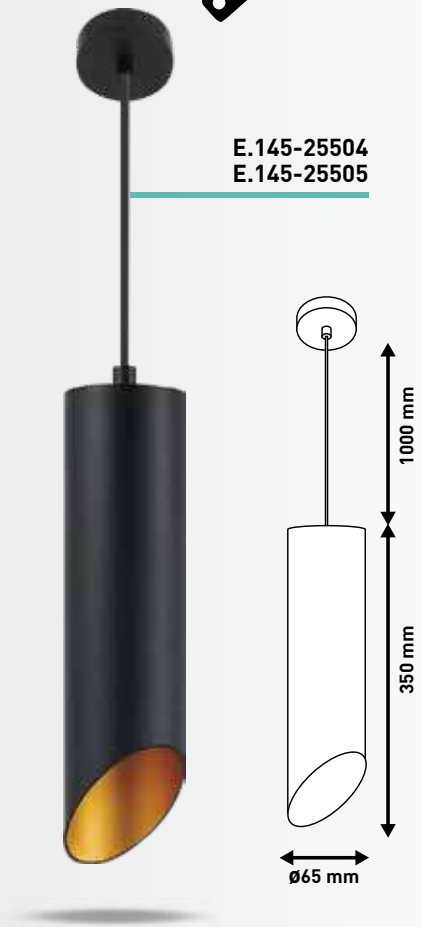

E.145-25502
E.145-25503

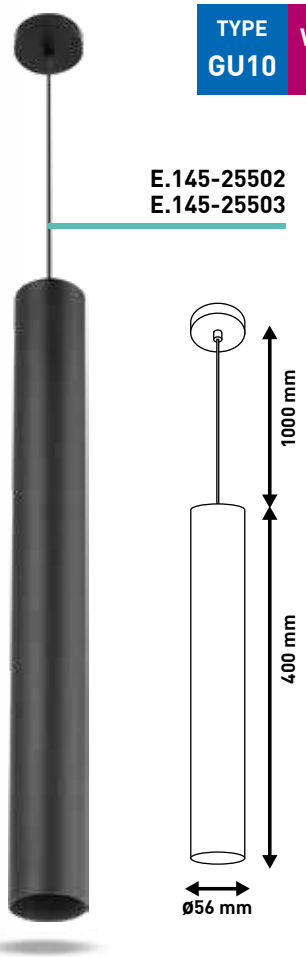

E.145-25500
E.145-25501

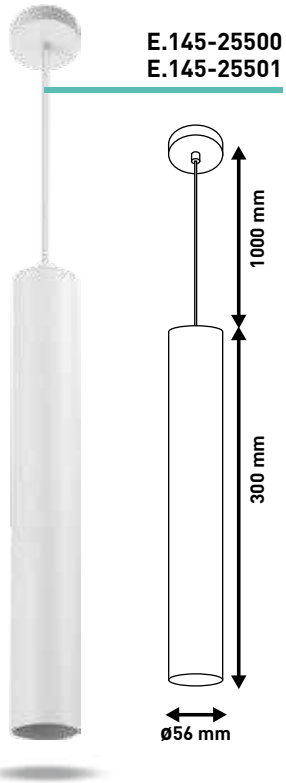

CODE	BARCODE	DIMENSION	COLOR	WEIGHT	PACKING	MOQ
E.145-25500	5207227066191	ø56x300mm	BLANCO / WHITE	0.525Kg	1/20	1
E.145-25501	5207227066214	ø56x300mm	NEGRO / BLACK	0.525Kg	1/20	1
E.145-25502	5207227066238	ø56x400mm	BLANCO / WHITE	0.770Kg	1/10	1
E.145-25503	5207227066252	ø56x400mm	NEGRO / BLACK	0.770Kg	1/10	1
E.145-25504	5207227066276	ø65x300mm	NEGRO-ORO/BLACK-GOLD	0.550Kg	1/20	1
E.145-25505	5207227066290	ø65x300mm	NEGRO-ORO/BLACK-GOLD	0.720Kg	1/10	1



- ADAPTADORES PARA PORTALAMPARAS
- LAMPHOLDER ADAPTORS


E.147-23050


E.147-23051


E.147-23052


E.147-23053


E.147-23054


E.147-23055


E.147-23056


E.147-23057

VOLT 250V | OPERATING TEMPERATURE +60°C -20°C | Bulk PACKING

CODE	BARCODE	SPECIAL DESCRIPTION	MATERIAL	PACKING	MOQ
E.147-23050	5206139108449	DE E27 A E40 / FROM E27 TO E40	PLASTIC	20/400	5
E.147-23051	5206139108456	DE E40 A E27 / FROM E40 TO E27	PLASTIC	25/500	5
E.147-23052	5206139108463	DE E14 A GU10 / FROM E14 TO GU10	PLASTIC	12/360	12
E.147-23053	5206139108470	DE E14 A G9 / FROM E14 TO G9	PLASTIC	12/600	12
E.147-23054	5206139108487	DE E27 A E14 / FROM E27 TO E14	PLASTIC	12/600	12
E.147-23055	5206139108494	DE B22 A E27 / FROM B22 TO E27	PLASTIC	12/600	12
E.147-23056	5206139009920	DE E27 A GU10 / FROM E27 TO GU10	PLASTIC	12/360	12
E.147-23057	5206139053817	DE E14 A E27 / FROM E14 TO E27	PLASTIC	12/600	12

- PORTALAMPARAS PORCELANA
- LAMPHOLDERS PORCELAIN


A107/I


E.147-23013


A107


A101

VOLT 250V | OPERATING TEMPERATURE +60°C -20°C | Bulk PACKING

CODE	BARCODE	COLOR	SPECIAL DESCRIPTION	BASEHOLD	IP	MATERIAL	PACKING	MOQ
A107/I	8434067172301	◯	CABLE 10cm	**GU10**	**IP20**	CERAMIC	50/500	30
E.147-23013	5207227069208	◯	CABLE 25cm	**GU10**	**IP20**	CERAMIC	50/500	30
A107	8434067172295	◯	CLASE II - CLASS II	**GU10**	**IP20**	CERAMIC	100/1000	20
A101	8434067172134	◯	CABLE 15cm	**GU5,3**	**IP20**	CERAMIC	10/200	10



• CONECTOR DE CABLES
• WIRE CONNECTOR



E.147-11030



E.147-11031



E.147-11032

- Adecuado para cables con seccion de hasta 3x2,5 mm
- Suitable for cables with cross section up to 3x2.5mm

AMPERAGE 16 A | OPERATING TEMPERATURE +85°C -40°C | 3 YEARS GUARANTEE

Nylon Bag with Sticker PACKING



CODE	BARCODE	CROSS CABLE	IP	DIMENSION	WEIGHT	PACKING	MOQ
E.147-11030	5207227059339	3x1,5	67	27.5x85mm	0.048 kg	10/400	10
E.147-11031	5207227059360	3x1,5	67	103.6x69.2mm	0.073 kg	10/200	10
E.147-11032	5207227124334	3x2,5	68	114x35mm	0.050 kg	10/300	10





• AROS PRE-INSTALACION
• PRE-INSTALLATION RINGS

CODE	BARCODE	SPECIAL DESCRIPTION	MATERIAL	PACKING	MOQ
ST-70	8434067181808	ARO PRE-INSTALACION EN BOVEDILLA	PLASTIC	550	1
ST-77	8434067181815	PRE-INSTALLATION RINGS	PLASTIC	625	1
ST-80	8434067181822	ARO PRE-INSTALACION EN BOVEDILLA	PLASTIC	550	1
ST-90	8434067181839	PRE-INSTALLATION RINGS	PLASTIC	500	1
ST-100	8434067181785	ARO PRE-INSTALACION EN BOVEDILLA	PLASTIC	400	1
ST-202	8434067181792	PRE-INSTALLATION RINGS	PLASTIC	130	1



• ILUMINACION LED CON INTERRUPTOR PARA ARMARIOS
• LED LIGHT WITH SWITCH FOR CUPBOARDS

YouTube

- Ideal para armarios / Ideal for closets
- Tornillos de montaje incluidos / Screws are included

BATTERY 1x 23A | ON-OFF SWITCH | 3 CHIPS | IP20 | 1 YEAR GUARANTEE

4 PCS Double Blister PACKING



CODE	BARCODE	WATT	WEIGHT	DIMENSION	PACKING	MOQ
145-15063	5207227019562	0.12W	0.088 kg	50x25x15mm	1/25/100	5

• DETECTORES DE MOVIMIENTO INFRARROJOS
• INFRARED MOVEMENT DETECTORS



- Angulo deteccion / Detection Angle: **180º - 360º**
- Velocidad deteccion / Detection Speed: **0,6-1,5mtr/sec**
- Distancia deteccion / Detection Distance: **max. 12mtr**
- Tiempo retardo / Delay Time: **min:10sec max:15min**
- Altura instalacion / Installation Height: **2.20-4.0 m**

• 3 IN 1 PARED / TECHO / ESQUINA
WALL / CEILING / CORNER

VOLT 220-240 V 50/60Hz | AMPERAGE 15 A | INFRARED SENSOR | OPERATING TEMPERATURE +40°C -20°C | IP54 | 3 YEARS GUARANTEE

COLOR **Box** PACKING

CODE	BARCODE	COLOR	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-02019	5207227106910	○	max. 300W LED	111.5x78x65mm	0.495 kg	1/50	2
E.147-02020	5207227106927	●	max. 300W LED	111.5x78x65mm	0.495 kg	1/50	2

• DETECTOR DE MOVIMIENTO EMPOTRADO
• CEILING MOVEMENT DETECTOR RECESSED



E.147-02007

- Angulo deteccion / Detection Angle: **180º**
- Velocidad deteccion / Detection Speed: **0,6-1,5mtr/sec**
- Distancia deteccion / Detection Distance: **max. 6mtr**
- Tiempo retardo / Delay Time: **min:10sec max:15min**
- Altura instalacion / Installation Height: **2.20-4.0 m**
- Corte techo / Cutting Diameter: **Ø65mm**



E.147-02017

- PRESENCE SENSOR
- DETECTOR DE PRESENCIA

- Angulo deteccion / Detection Angle: **360º**
- Velocidad deteccion / Detection Speed: **0,6-1,5mtr/sec**
- Distancia de deteccion / Detection Distance: **2-20mtr**
- Tiempo retardo / Delay Time: **min:10sec max:7min**
- Altura instalacion / Installation Height: **2.20-6.0 m**
- Luz ambiental / Ambient Light: **10Lux - 2000Lux Adjustable**
- Corte techo / Cutting Diameter: **Ø76mm**

VOLT 220-240 V 50/60Hz | INFRARED SENSOR | OPERATING TEMPERATURE +40°C -20°C | IP20 | 2 YEARS GUARANTEE

COLOR **Box** PACKING

CODE	BARCODE	WATT	DIMENSION	WEIGHT	PACKING	MOQ
E.147-02007	5206139038456	max. 300W LED	75.6 x Ø76 mm	0.500 kg	1/50	1
E.147-02017	5207227058905	max 150W LED	90 x Ø110 mm	0.500 kg	1/50	3



wonder® by EUROLAMP®

• CINTA AISLANTE DE PVC
• PVC ELECTRICAL INSULATING TAPES






PRODUCTION MATERIAL: **PVC/ FLAME RETARDANT**
MATERIAL DE PRODUCCION: **PVC/ RETARDANTE DE LLAMA**

OPERATING TEMPERATURE +80°C 0°C

Shrink Film PACKING



CODE	BARCODE	COLOR	LENGTH	WIDTH	THICKNESS	PACKING	MOQ
E.147-34000	5206139202000		20 m	19 mm	0.125 mm	10/300	10
E.147-34001	5206139202017		20 m	19 mm	0.125 mm	10/300	10
E.147-34002	5206139202024		20 m	19 mm	0.125 mm	10/300	10
E.147-34003	5206139202031		20 m	19 mm	0.125 mm	10/300	10
E.147-34004	5206139202048		20 m	19 mm	0.125 mm	10/300	10
E.147-34005	5206139202055		20 m	19 mm	0.125 mm	10/300	10
E.147-34006	5206139202062		20 m	19 mm	0.125 mm	10/300	10
E.147-34007	5206139202079		20 m	19 mm	0.125 mm	10/300	10
E.147-34008	5206139202086		20 m	19 mm	0.125 mm	10/300	10

• BASE BAQUELITA CON PORTALAMPARAS PARA GLOBO
• GLASS GLOBE BASE BAKELITE WITH LAMPHOLDER



E.147-22004



E.147-22003

OPERATING TEMPERATURE +60°C -20°C

IP20

Bulk PACKING






E.153-65999

CODE	BARCODE	DIMENSION	PACKING	MOQ
E.147-22003	5206139108531	60 x Ø130mm	1/10/100	10
E.147-22004	5206139108548	90 x Ø140mm	1/10/100	10
E.153-65999	5206139519993	Ø160mm	1/16	5

- GUIRNALDA LED, CONECTABLE
- STRING LED LIGHTS, CONNECTABLE

CABLE VERDE

IP44

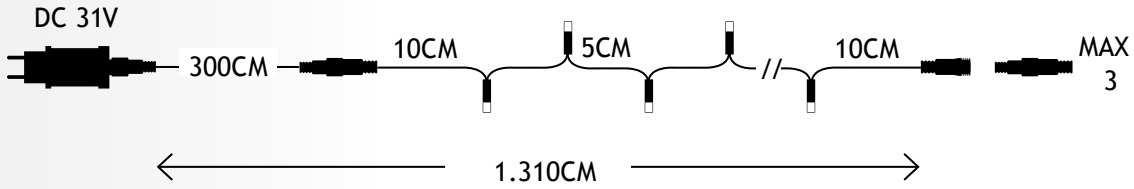


CODE	BARCODE	KELVIN	WATT	DIMENSION L	LED	PACKING	MOQ
E.600-11310	5206139095480	7500-8500º	max. 3,6W	1.310 cm	100	1/36	1
E.600-11311	5606139098702	2200-2300º	max. 3,6W	1.310 cm	100	1/36	1

- CORTINA ICICLE LED, CONECTABLE
- LED CURTAIN, CONNECTABLE

CABLE TRANSPARENTE

IP44

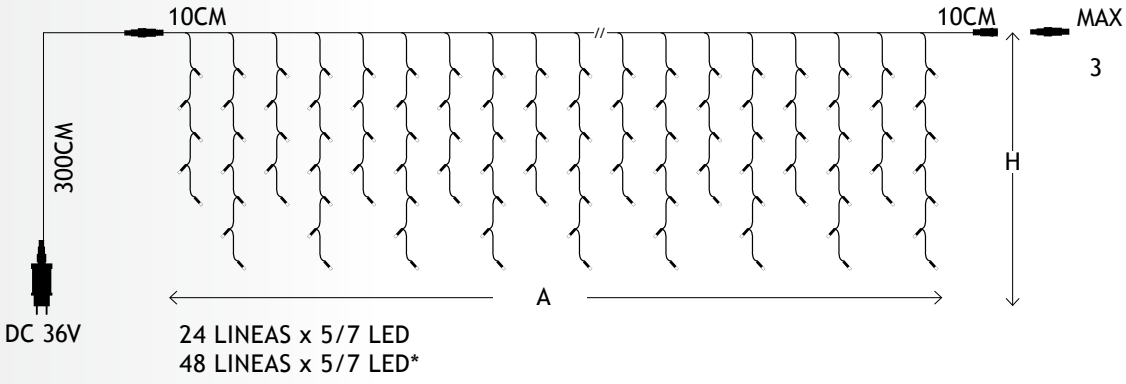

CODE	BARCODE	KELVIN	WATT	DIMENSION AxH	LED	PACKING	MOQ
E.600-11356	5206139046055	2200-2300º	max. 6,0W	300x60 cm	144	1/24	1
E.600-11358*	5606139046079	2200-2300º	max. 8,4W	600x60 cm	288	1/24	1




Magic Christmas

- RED LED, CONECTABLE
- LED NET, CONNECTABLE

CABLE VERDE

IP44

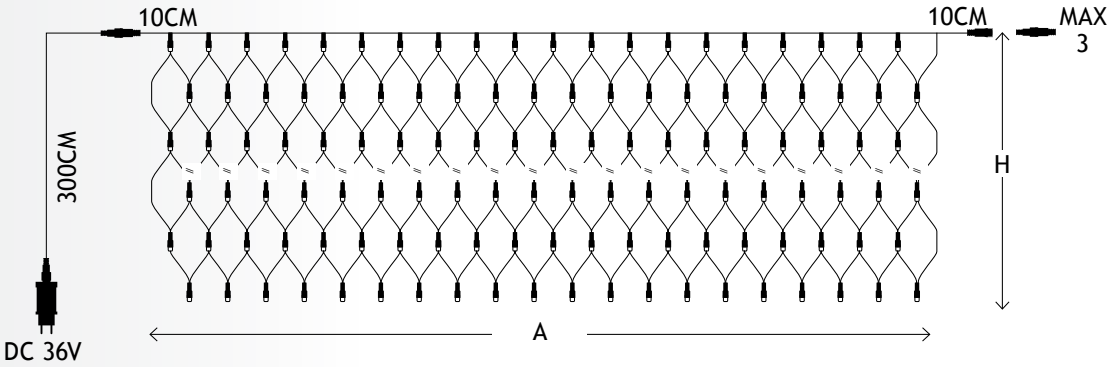


CODE	BARCODE	KELVIN	WATT	DIMENSION AxH	LED	PACKING	MOQ
E.600-11381	5206139046222	2200-2300º	max. 7,2W	200x150 cm	240	1/24	1
E.600-11383	5607227090783	2200-2300º	max. 3,6W	200x40 cm	120	1/24	1

- CORTINA LED, CONECTABLE
- LED CURTAIN, CONNECTABLE

CABLE TRANSPARENTE

IP44

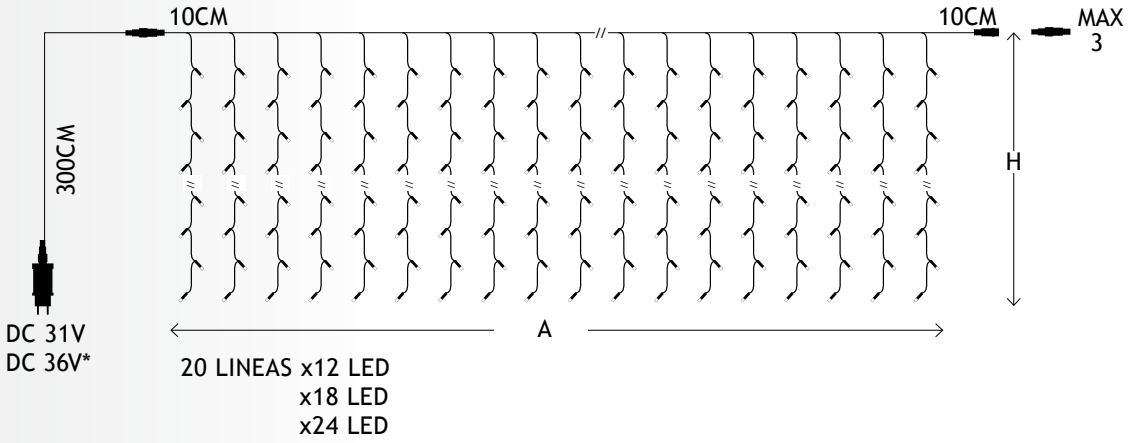

CODE	BARCODE	KELVIN	WATT	DIMENSION AxH	LED	PACKING	MOQ
E.600-11362	5206139046086	7500-8500º	max. 7,2W	200x100 cm	240	1/24	1
E.600-11363	5606139052438	2200-2300º	max. 7,2W	200x100 cm	240	1/24	1
E.600-11370	5206139046093	7500-8500º	max. 8,4W	200x200 cm	360	1/12	1
E.600-11371	5606139046192	2200-2300º	max. 8,4W	200x200 cm	360	1/12	1
E.600-11379*	5207227090769	7500-8500º	max. 8,4W	300x300 cm	480	1/12	1
E.600-11375*	5206139046208	2200-2300º	max. 8,4W	300x300 cm	480	1/12	1

- CORTINA LED 27 LINEAS X 28 LED RGBW
- LED CURTAIN 27 LINES X 28 RGBW LED

DISPONIBLE EN DIMENSIONES MAYORES BAJO PEDIDO
AVAILABLE IN BIGGER DIMENSIONS, ON REQUEST


Magic Christmas

Smart Control !

756
mini LED

SCAN ME

Watch the video
Ver el Video

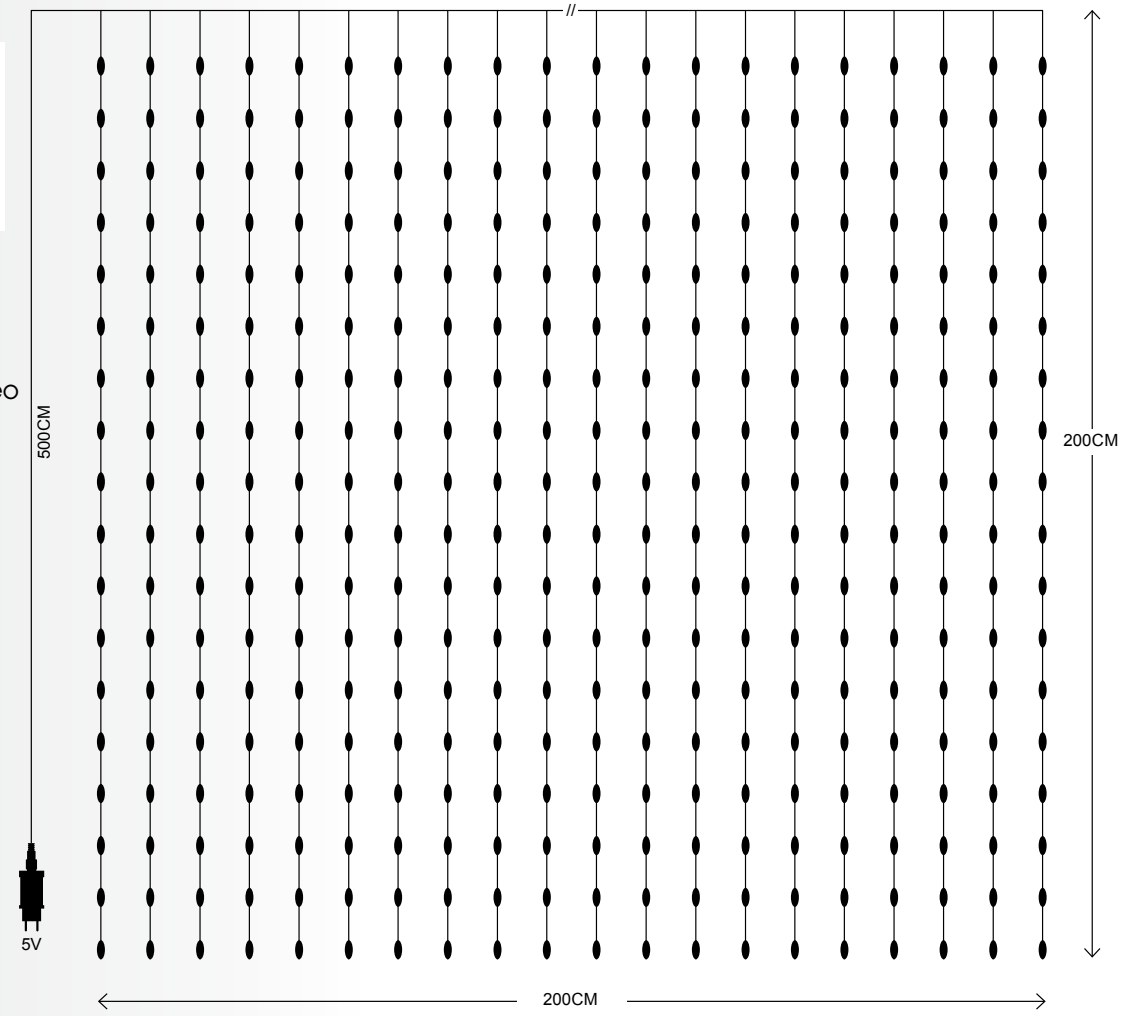


CABLE TRANSPARENTE

IP44

SIN ENREDOS
¡Con un cable plano que no se enreda!

APPLICATION
SuperPix

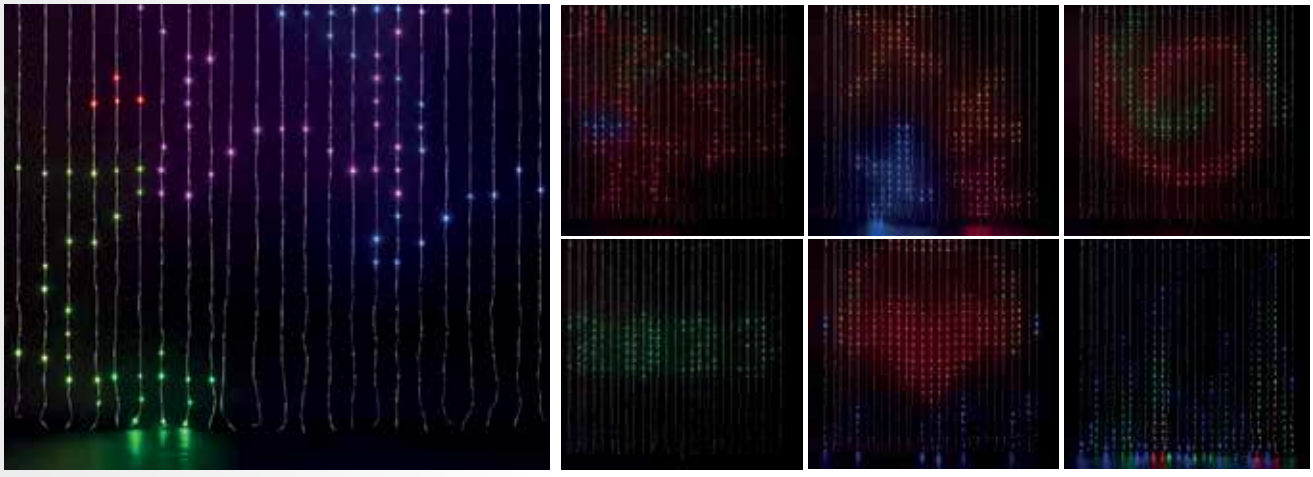

CODE	BARCODE	COLOR	WATT	DIMENSION	LED	PACKING	MOQ
E.600-11782	5207227185014	RGBW	max. 25W	2000x2000 mm	756	1/50	1



Magic Christmas

- CORDON LED, CONECTABLE
- ROPE LIGHT LED, CONNECTABLE

2023 dosmilveintitres

IP44

Ø 13mm

Dirección bombilla : Horizontal
Lamp direction: Horizontal

LED 3,0V - 10mA - 0,3W



150cm
Cable extension
Extensión de Cable



CODE	BARCODE	KELVIN	WATT	CORTE CADA	LED	PACKING	MOQ
E.600-22200	5206139093394	2700-3000º	max.3,4W / m	2m	36 LED/m	1/1	1
E.600-22201	5607227093400	8000-12000º	max. 3,4W / m	2m	36 LED/m	1/1	1

Descubra los catálogos de artículos de Navidad de nuestra marca:
Siempre disponibles on-line en:

Discover our catalogs of Christmas items from our brand:
Always available online at:

Magic Christmas

www.aimur.com



LIGHTS **DECORATION** **OUTDOOR DECORATION**

- Luminarias LED tipo fluorescente
- LED Ceiling Fluorescent Lights






Ideal para uso en:

- Tiendas
- Residencias
- Centros comerciales
- Almacenes
- Oficinas
- Areas Industriales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Residences
- Shopping malls
- Warehouses
- Business Areas
- Industrial Areas
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

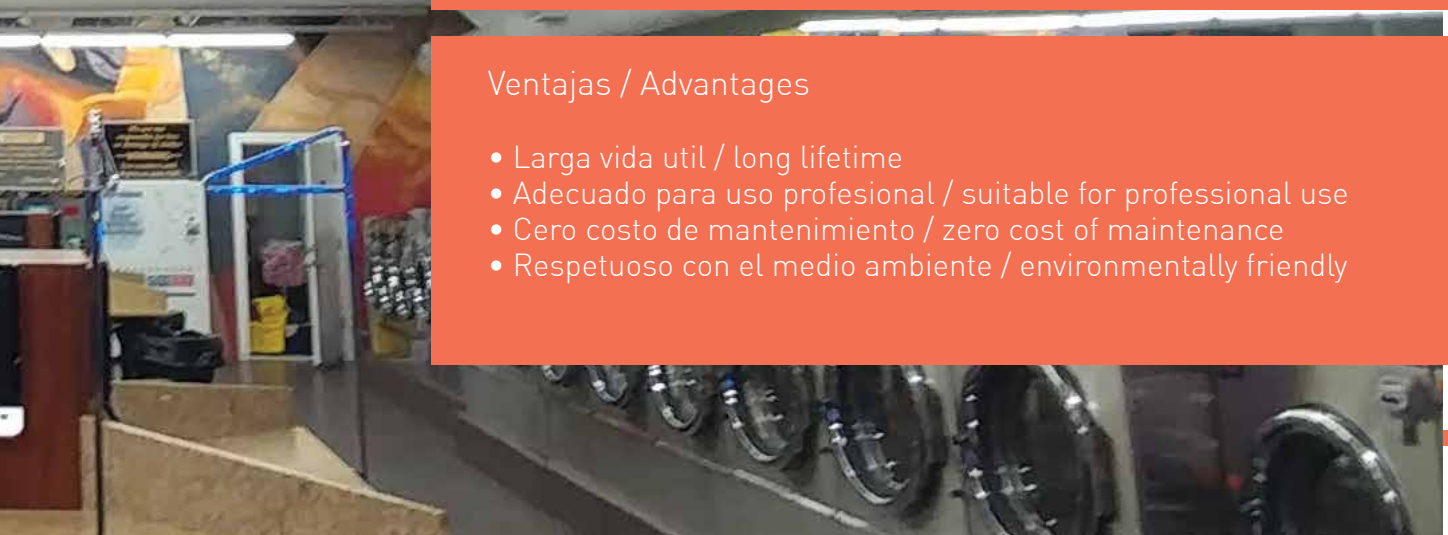

Ventajas / Advantages

- Larga vida util / long lifetime
- Adecuado para uso profesional / suitable for professional use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly



• PANTALLA ESTANCA "DICHT" PARA TUBOS LED
• BATTEN LUMINAIRES EMPTY "DICHT"

MATERIAL DE PRODUCCION: **BASE PC GRIS Y DIFUSOR TRANSPARENTE PC**
PRODUCTION MATERIAL: **GREY PC BASE & TRANSPARENT PC DIFFUSER**



PE-INOX
OPTIONAL INOX CLIPS
CLIPS INOX OPCIONALES




CON 2 PRENSAESTOPAS
WITH 2 CABLE GLANDS



Brown Box with sticker
PACKING



CODE	BARCODE	WATT	DIMENSIONS	Nº CLIPS	COLOR	PACKING	MOQ	PRICE (€)
PE1060	8434067005487	max 9W LED	655x68x90mm	6	GREY	1/12	12	**16,35 €**
PE1120	8434067005494	max 18W LED	1263x68x90mm	10	GREY	1/12	12	**21,95 €**
PE1150	8434067005500	max 24W LED	1564x66x90mm	12	GREY	1/8	8	**30,75 €**
PE060	8434067005470	max 2x9W LED	655x108x90mm	6	GREY	1/8	8	**19,70 €**
PE120	8434067000598	max 2x18W LED	1263x108x90mm	10	GREY	1/8	8	**27,55 €**
PE150	8434067000604	max 2x24W LED	1564x109x90mm	12	GREY	1/8	8	**37,30 €**
PE-INOX	8434067183901	-	-	-	-	1/2000	1	**0,45 €**

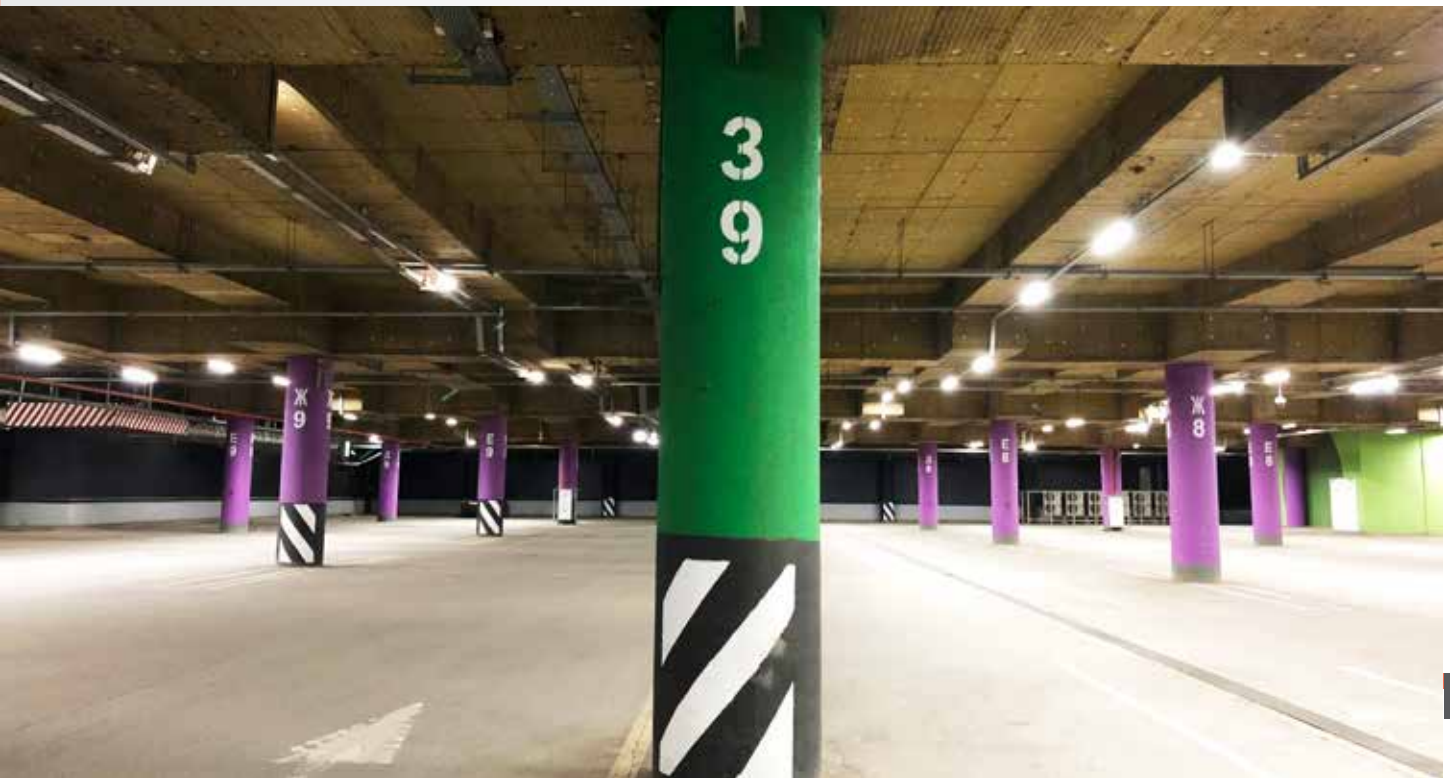

- REGLETA LED CONECTABLE
- LIGHTING LED TUBES

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**



EXPANSION 15 m

1m WIRE WITH PLUG
50cm CABLE ME ENCHUFE

PLUS | VOLT 220-240V 50/60Hz | G ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 180° | IP20 | 2 YEARS GUARANTEE

LUMENS 80 lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | 0-1.5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +40°C -20°C



Color Box
PACKING

Disponible:

Available in: 3000K 4000K 6500K

CODE	BARCODE	WATT	KELVIN	AMPERAGE	LENGTH (cm)	WEIGHT	PACKING	MOQ
E.147-55300	5207227122743	4W	6500K	50 mA	30	0.160Kg	1/30	1
E.147-55301	5207227111273	4W	4000K	50 mA	30	0.160Kg	1/30	1
E.147-55302	5207227122729	4W	3000K	50 mA	30	0.160Kg	1/30	1
E.147-55303	5207227111297	8W	6500K	75 mA	60	0.190Kg	1/30	1
E.147-55304	5207227111310	8W	4000K	75 mA	60	0.190Kg	1/30	1
E.147-55305	5207227122712	8W	3000K	75 mA	60	0.190Kg	1/30	1
E.147-55306	5207227111334	12W	6500K	85 mA	90	0.240Kg	1/30	1
E.147-55307	5207227111358	12W	4000K	85 mA	90	0.240Kg	1/30	1
E.147-55308	5207227122699	12W	3000K	85 mA	90	0.240Kg	1/30	1
E.147-55309	5207227111372	16W	6500K	105 mA	120	0.390Kg	1/30	1
E.147-55310	5207227111396	16W	4000K	105 mA	120	0.390Kg	1/30	1
E.147-55311	5207227122675	16W	3000K	105 mA	120	0.390Kg	1/30	1
E.147-55312	5207227111419	20W	6500K	120 mA	150	0.490Kg	1/30	1
E.147-55313	5207227111433	20W	4000K	120 mA	150	0.490Kg	1/30	1
E.147-55314	5207227122668	20W	3000K	120 mA	150	0.490Kg	1/30	1

MATERIAL DE PRODUCCION: **HIERRO & PLASTICO**
PRODUCTION MATERIAL: **IRON & PLASTIC**

CLOSED TYPE WITH LED TAPES / TIPO CERRADO CON TIRAS LED



CONNECTION WITH WIRE
CONEXION CON CABLE

PLUS | VOLT 180-260V 50/60Hz | G ENERGY CLASS | NOT DIMMABLE | BEAM ANGLE 120° | IP20 | 2 YEARS GUARANTEE

LUMENS 70 lm/w | ON-OFF 25.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >70 | START TIME 1 Sec | 3m INSTALLATION HEIGHT | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -5°C



Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	AMPERAGE	LENGTH (cm)	WEIGHT	PACKING	MOQ
E.147-55350	5207227018688	18W	6500K	250 mA	60	0.200Kg	1/30	1
E.147-55352	5207227018701	36W	6500K	300 mA	120	0.400Kg	1/20	1



• LUMINARIA INDUSTRIAL VACIA
• BATTEN LUMINAIRES EMPTY

MATERIAL DE PRODUCCION: **HIERRO**
PRODUCTION MATERIAL: **IRON**


TYPE	BASE	VOLT	BEAM ANGLE					
T8	G13	80-270V 50/60Hz	120°	3-5 m INSTALLATION HEIGHT	GROUNDING	OPERATING TEMPERATURE +50°C -20°C	IP20	2 YEARS GUARANTEE



Nylon Bag
PACKING

SLIM



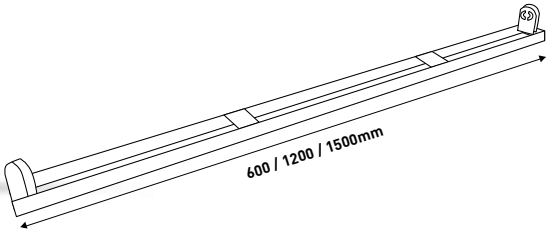


CODE	BARCODE	WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56550	5207227018725	max 9W LED	600x35x18mm	0.134Kg	WHITE / BLANCO	1/50	10
E.147-56551	5207227018749	max 18W LED	1200x32x16mm	0.240Kg	WHITE / BLANCO	1/25	5
E.147-56553	5207227018763	max 2x9W LED	600x40x200mm	0.205Kg	WHITE / BLANCO	1/32	10
E.147-56554	5207227018787	max 2x18W LED	1200x45x25mm	0.354Kg	WHITE / BLANCO	1/25	5
E.147-56556	5207227031595	max 24W LED	1500x30x45mm	0.273Kg	WHITE / BLANCO	1/50	5
E.147-56557	5207227031625	max 2x24W LED	1500x75x48mm	0.300Kg	WHITE / BLANCO	1/32	5

OVAL



MATERIAL DE PRODUCCION: **HIERRO & PLASTICO**
PRODUCTION MATERIAL: **IRON & PLASTIC**

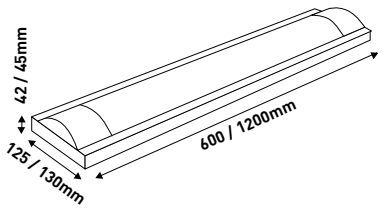





Color Box
PACKING

CODE	BARCODE	WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56020	5207227004124	max 2x9W LED	600x130x45mm	0.500Kg	WHITE / BLANCO	1/12	1
E.147-56021	5207227004148	max 2x18W LED	1200x125x42mm	0.907Kg	WHITE / BLANCO	1/10	1

MATERIAL DE PRODUCCION: **HIERRO & PLASTICO**
PRODUCTION MATERIAL: **IRON & PLASTIC**

OVAL WITH GRILLES
OVALADO CON REJILLAS

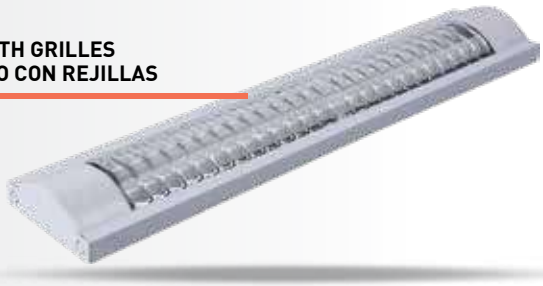

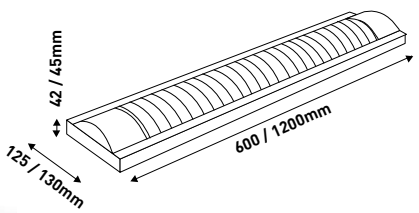



Color Box
PACKING

CODE	BARCODE	WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56022	5207227004162	max 2x9W LED	600x130x45mm	0.513Kg	WHITE / BLANCO	1/12	1
E.147-56023	5207227004186	max 2x18W LED	1200x125x42mm	0.911Kg	WHITE / BLANCO	1/10	1

- LUMINARIAS LINEALES LED
- LINEAR LED FIXTURES

MATERIAL DE PRODUCCION: **NANO PC**
PRODUCTION MATERIAL: **NANO PC**



PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 100lm/w | ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS II | 2-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -20°C



Color Box Cap by Shrink Film PACKING

Disponible:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56620	5207227068362	18W	80mA	6500K	625x43x33mm	0.230Kg	MILKY/OPAL	1/24	1
E.147-56621	5207227068386	18W	80mA	4000K	625x43x33mm	0.230Kg	MILKY/OPAL	1/24	1
E.147-56622	5207227071881	18W	80mA	3000K	625x43x33mm	0.230Kg	MILKY/OPAL	1/24	1
E.147-56623	5207227068409	24W	109mA	6500K	1225x43x33mm	0.350Kg	MILKY/OPAL	1/24	1
E.147-56624	5207227068423	24W	109mA	4000K	1225x43x33mm	0.350Kg	MILKY/OPAL	1/24	1
E.147-56625	5207227071898	24W	109mA	3000K	1225x43x33mm	0.350Kg	MILKY/OPAL	1/24	1
E.147-56626	5207227068447	36W	162mA	6500K	1525x43x33mm	0.430Kg	MILKY/OPAL	1/24	1
E.147-56627	5207227068461	36W	162mA	4000K	1525x43x33mm	0.430Kg	MILKY/OPAL	1/24	1
E.147-56628	5207227071904	36W	162 mA	3000K	1525x43x33mm	0.430Kg	MILKY/OPAL	1/24	1






• LUMINARIAS LINEALES LED
• LINEAR LED FIXTURES

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



WHITE BASE/MILKY COVER
BASE BLANCA/CUBIERTA OPAL
SLIM

CON 2 PRENSAESTOPAS
WITH 2 CABLE GLANDS



Color Box
Cap by
Shrink Film
PACKING



CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56610	5207227068249	18W	80mA	6500K	640x58x37mm	0.150Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56611	5207227068263	18W	80mA	4000K	640x58x37mm	0.150Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56612	5207227071850	18W	80mA	3000K	640x58x37mm	0.150Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56613	5207227068287	36W	162mA	6500K	1260x58x37mm	0.300Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56614	5207227068300	36W	162mA	4000K	1260x58x37mm	0.300Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56615	5207227071867	36W	162mA	3000K	1260x58x37mm	0.300Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56616	5207227068324	45W	205mA	6500K	1540x58x37mm	0.400Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56617	5207227068348	45W	205mA	4000K	1540x58x37mm	0.400Kg	WHITE BASE/MILKY COVER	1/24	1
E.147-56618	5207227071874	45W	205mA	3000K	1540x58x37mm	0.400Kg	WHITE BASE/MILKY COVER	1/24	1



- LUMINARIAS LINEALES LED SLIM CON SENSOR DE MOVIMIENTO
- LINEAR LIGHT FIXTURES LED SLIM WITH MOVEMENT SENSOR

MATERIAL DE PRODUCCION: **ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

MICROWAVE SENSOR





CON 2 PRENSAESTOPAS
WITH 2 CABLE GLANDS

PRO | VOLT 220-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 125lm/w | ON-OFF 25.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS I | 2-3 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +45°C -20°C



Brown Box with sticker
PACKING

Disponible:
Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56633	5207227119132	40W	220mA	6500K	1225x74x67mm	1.600Kg	BLACK BASE/MILKY COVER	1/6	1
E.147-56634	5207227119149	40W	220mA	4000K	1225x74x67mm	1.600Kg	BLACK BASE/MILKY COVER	1/6	1
E.147-56636	5207227119156	60W	330mA	6500K	1525x74x67mm	2.000Kg	BLACK BASE/MILKY COVER	1/6	1
E.147-56637	5207227119163	60W	330mA	4000K	1525x74x67mm	2.000Kg	BLACK BASE/MILKY COVER	1/6	1





- PANTALLA ESTANCA PARA TUBOS LED
- BATTEN LUMINAIRES EMPTY

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**

WITH INOX CLIPS
CON CLIPS INOX



CON 2 PRENSAESTOPAS
WITH 2 CABLE GLANDS



Brown Box with sticker
PACKING

TYPE	BASE	VOLT	BEAM ANGLE	INSTALLATION HEIGHT	GROUNDING	OPERATING TEMPERATURE			
T8	G13	80-270V 50/60Hz	180°	2-5 m		+50°C -20°C	IP65	2 YEARS GUARANTEE	

CODE	BARCODE	WATT	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56060	5206139084279	max 9W LED	670x68x74mm	0.670Kg	GREY	1/6	1
E.147-56061	5206139084293	max 18W LED	1270x68x74mm	1.200Kg	GREY	1/6	1
E.147-56062	5206139084309	max 24W LED	1570x68x74mm	1.500Kg	GREY	1/6	1
E.147-56063	5206139084316	max 2x9W LED	670x104x74mm	0.950Kg	GREY	1/6	1
E.147-56064	5206139084323	max 2x18W LED	1270x104x74mm	1.520Kg	GREY	1/6	1
E.147-56065	5206139078131	max 2x24W LED	1570x104x74mm	1.900Kg	GREY	1/6	1



- LINEAR LED FIXTURES
- LUMINARIAS LED LINEALES

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**



CON 2 PRENSAESTOPAS
WITH 2 CABLE GLANDS

PRO | VOLT 220-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 120lm/w | ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS I | 2-3 3-5* m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +45°C -20°C



Brown Box with sticker
PACKING

Disponible:

Available in: **4000**K **5700**K


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56600	5207227059568	24W	165mA	4000K	600x92x60mm	0.800Kg	GREY BASE/MILKY COVER	1/15	1
E.147-56603	5207227059582	48W	216mA	4000K	1200x92x60mm	1.500Kg	GREY BASE/MILKY COVER	1/8	1
E.147-56606*	5207227059605	56W	243mA	4000K	1500x92x60mm	1.800Kg	GREY BASE/MILKY COVER	1/8	1
E.147-56607*	5207227069888	56W	243mA	5700K	1500x92x60mm	1.800Kg	GREY BASE/MILKY COVER	1/8	1





- Proyectores LED
- LED Flood Lights



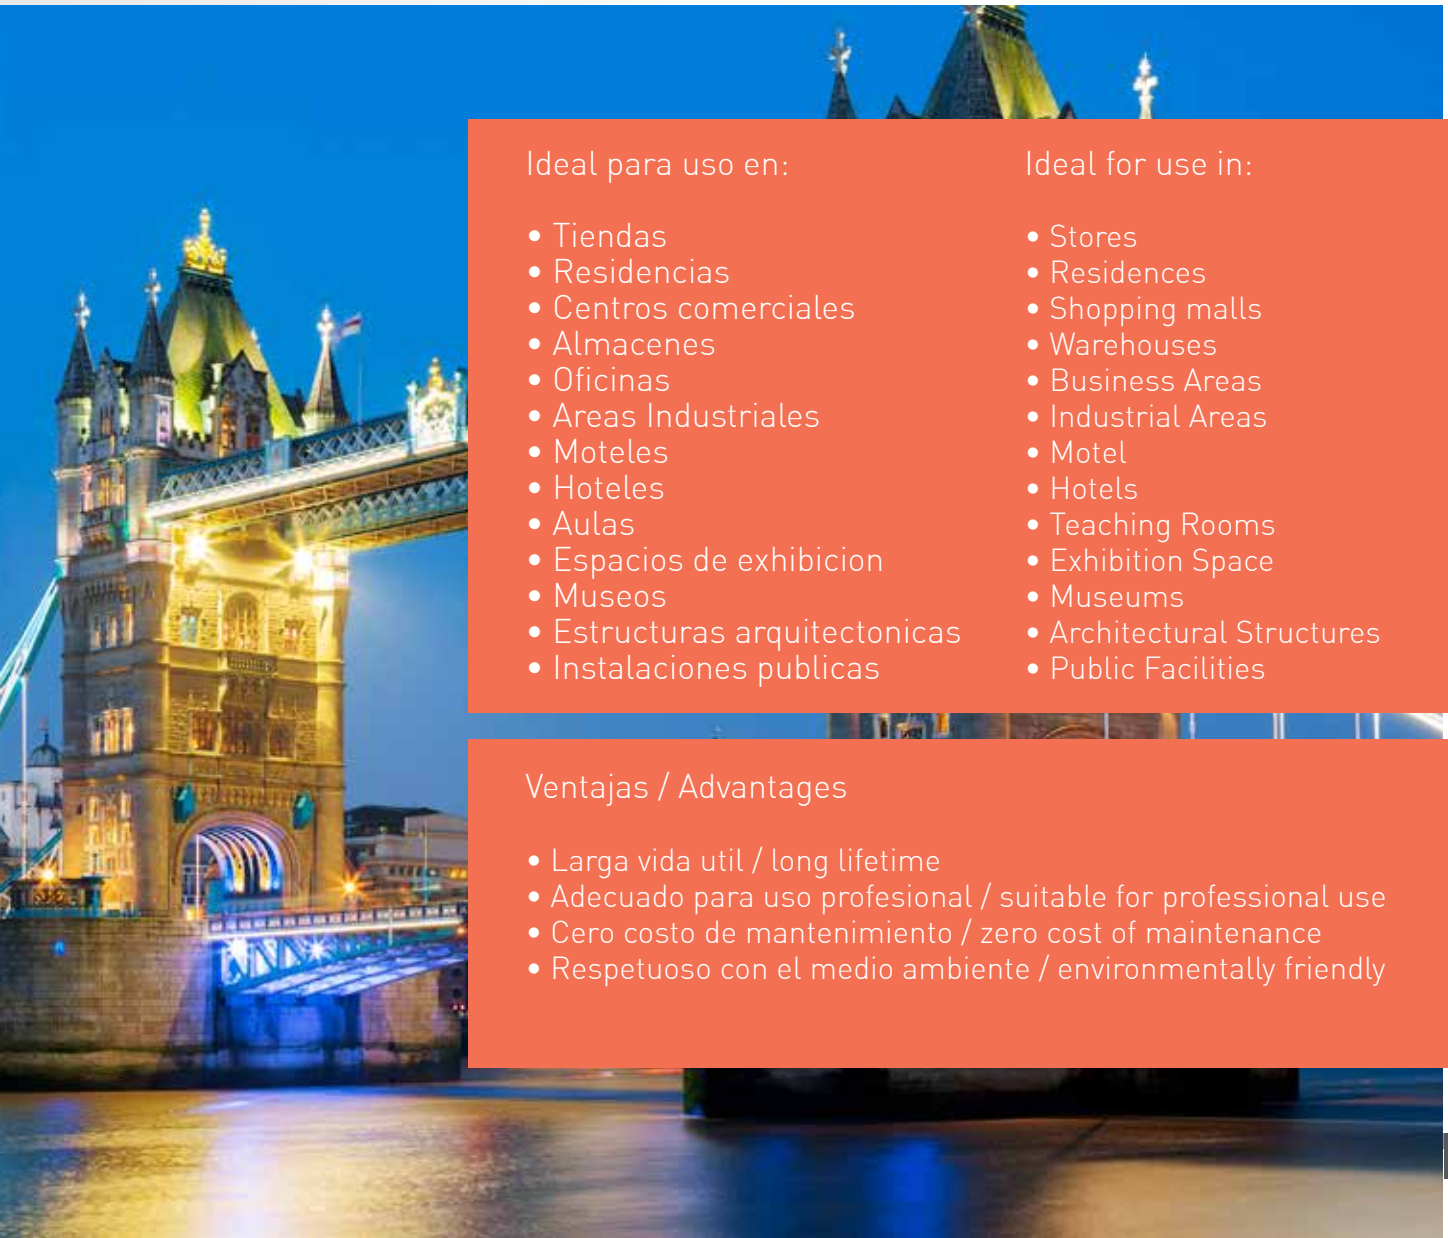

Ideal para uso en:

- Tiendas
- Residencias
- Centros comerciales
- Almacenes
- Oficinas
- Areas Industriales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Stores
- Residences
- Shopping malls
- Warehouses
- Business Areas
- Industrial Areas
- Motel
- Hotels
- Teaching Rooms
- Exhibition Space
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Adecuado para uso profesional / suitable for professional use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- PROYECTORES LED SMD BASE 360°
- PROJECTORS LED SMD BASE 360°


MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

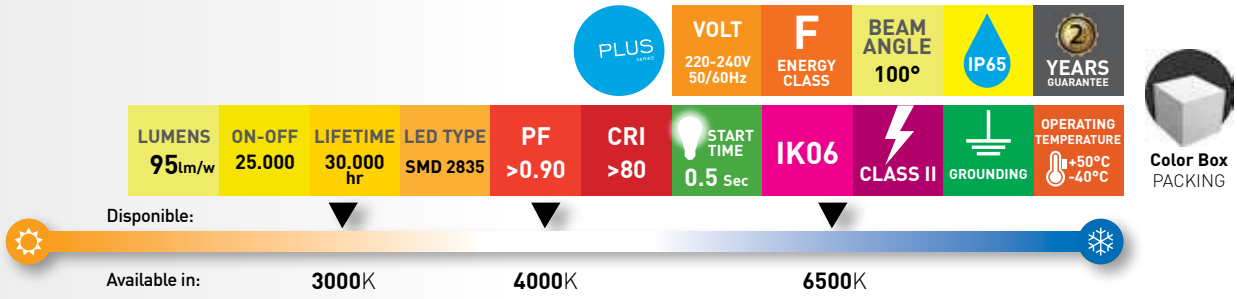

30cm WIRE / CABLE



113x22x127mm

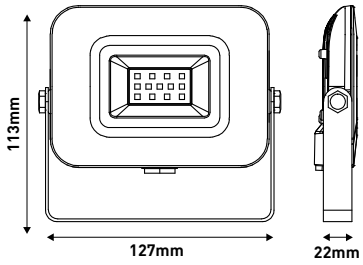


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69310	5207227061752	10W	50mA	6500K	0.230Kg	WHITE / BLANCO	1/60	5
E.147-69311	5207227077197	10W	50mA	4000K	0.230Kg	WHITE / BLANCO	1/60	5
E.147-69312	5207227061790	10W	50mA	3000K	0.230Kg	WHITE / BLANCO	1/60	5
E.147-69313	5207227061813	10W	50mA	6500K	0.230Kg	BLACK / NEGRO	1/60	5
E.147-69314	5207227061837	10W	50mA	4000K	0.230Kg	BLACK / NEGRO	1/60	5
E.147-69315	5207227061851	10W	50mA	3000K	0.230Kg	BLACK / NEGRO	1/60	5

30cm WIRE / CABLE



136x24x162mm

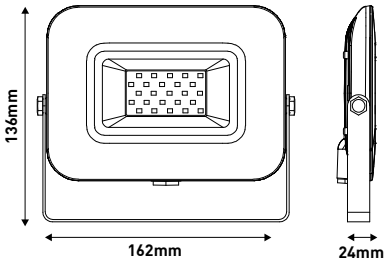

CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69316	5207227061875	20W	100mA	6500K	0.350Kg	WHITE / BLANCO	1/40	1
E.147-69317	5207227061899	20W	100mA	4000K	0.350Kg	WHITE / BLANCO	1/40	1
E.147-69318	5207227061912	20W	100mA	3000K	0.350Kg	WHITE / BLANCO	1/40	1
E.147-69319	5207227061936	20W	100mA	6500K	0.350Kg	BLACK / NEGRO	1/40	1
E.147-69320	5207227061950	20W	100mA	4000K	0.350Kg	BLACK / NEGRO	1/40	1
E.147-69321	5207227061974	20W	100mA	3000K	0.350Kg	BLACK / NEGRO	1/40	1






157x25x192mm

30cm WIRE / CABLE



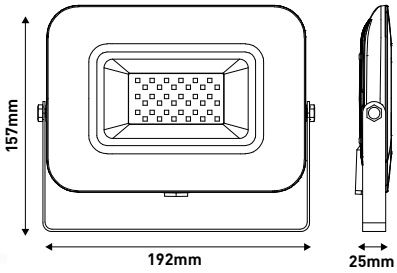


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69322	5207227061998	30W	150mA	6500K	0.480Kg	WHITE / BLANCO	1/20	1
E.147-69323	5207227062018	30W	150mA	4000K	0.480Kg	WHITE / BLANCO	1/20	1
E.147-69324	5207227062032	30W	150mA	3000K	0.480Kg	WHITE / BLANCO	1/20	1
E.147-69325	5207227062056	30W	150mA	6500K	0.480Kg	BLACK / NEGRO	1/20	1
E.147-69326	5207227062070	30W	150mA	4000K	0.480Kg	BLACK / NEGRO	1/20	1
E.147-69327	5207227062094	30W	150mA	3000K	0.480Kg	BLACK / NEGRO	1/20	1

185x26x227mm

30cm WIRE / CABLE



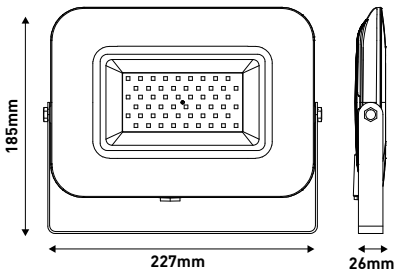


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69328	5207227062117	50W	250mA	6500K	0.670Kg	WHITE / BLANCO	1/20	1
E.147-69329	5207227062131	50W	250mA	4000K	0.670Kg	WHITE / BLANCO	1/20	1
E.147-69330	5207227062155	50W	250mA	3000K	0.670Kg	WHITE / BLANCO	1/20	1
E.147-69331	5207227062179	50W	250mA	6500K	0.670Kg	BLACK / NEGRO	1/20	1
E.147-69332	5207227062193	50W	250mA	4000K	0.670Kg	BLACK / NEGRO	1/20	1
E.147-69333	5207227062216	50W	250mA	3000K	0.670Kg	BLACK / NEGRO	1/20	1

316x245x33mm

30cm WIRE / CABLE




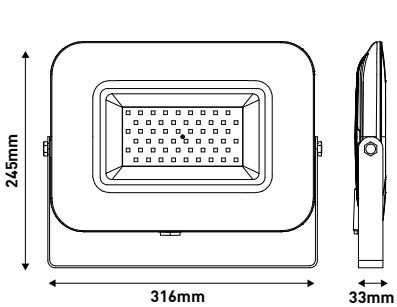


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69338	5207227120640	70W	350mA	4000K	1.800Kg	BLACK / NEGRO	1/20	1

- PROYECTORES LED SMD BASE 360°
- PROJECTORS LED SMD BASE 360°

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

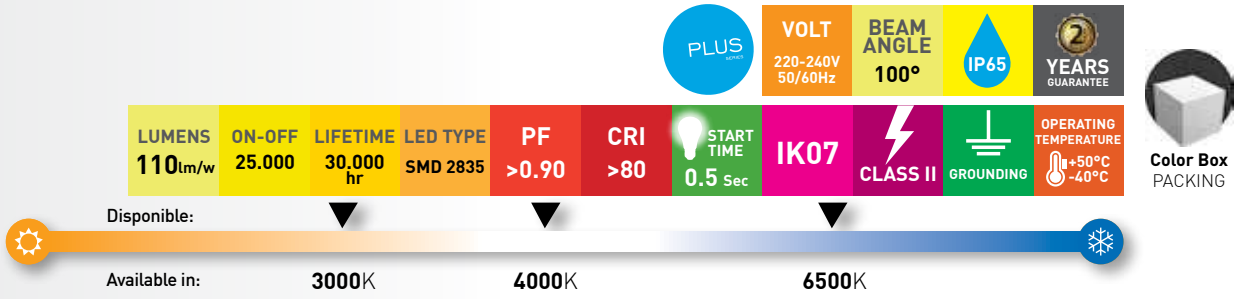




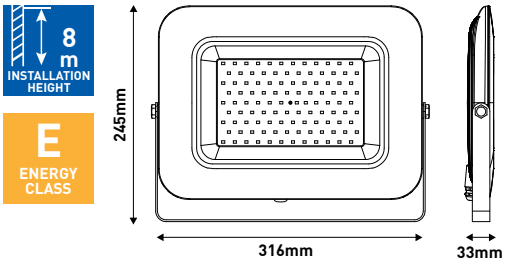

CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69350	5207227062230	100W	500mA	6500K	1.800Kg	BLACK / NEGRO	1/10	1
E.147-69351	5207227062254	100W	500mA	4000K	1.800Kg	BLACK / NEGRO	1/10	1
E.147-69352	5207227062278	100W	500mA	3000K	1.800Kg	BLACK / NEGRO	1/10	1



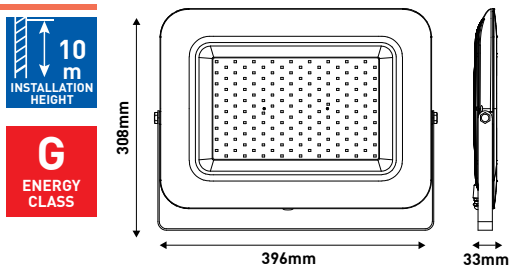


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69353	5207227062292	150W	750mA	6500K	3.400Kg	BLACK / NEGRO	1/4	1
E.147-69354	5207227062315	150W	750mA	4000K	3.400Kg	BLACK / NEGRO	1/4	1
E.147-69355	5207227062339	150W	750mA	3000K	3.400Kg	BLACK / NEGRO	1/4	1



• PROYECTORES LED SMD BASE 360°
• PROJECTORS LED SMD BASE 360°

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

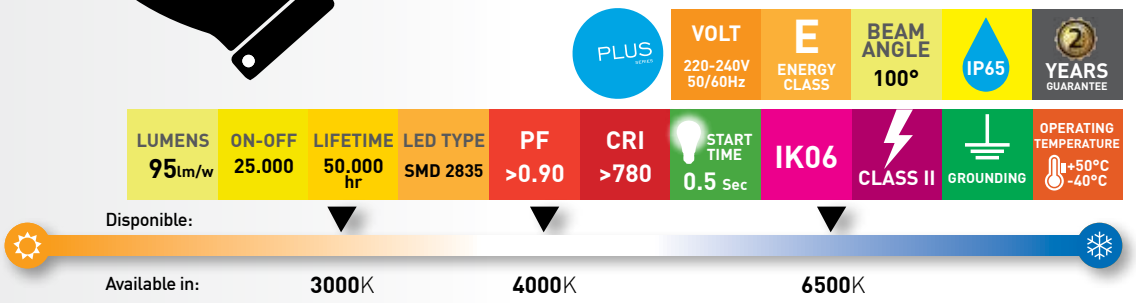










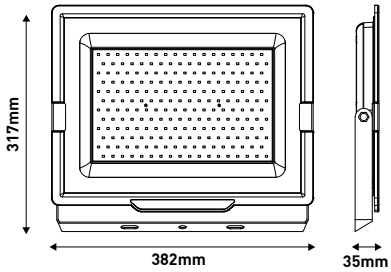


CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69356	5207227120664	200W	1000mA	6500K	2.400Kg	BLACK / NEGRO	1/5	1
E.147-69357	5207227120688	200W	1000mA	4000K	2.400Kg	BLACK / NEGRO	1/5	1








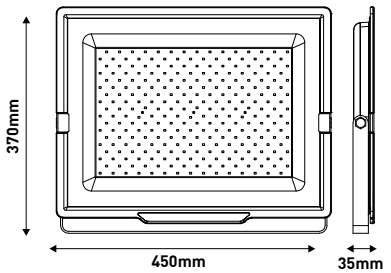

CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69358	5207227120701	300W	1500mA	6500K	3.100Kg	BLACK / NEGRO	1/4	1
E.147-69359	5207227120725	300W	1500mA	4000K	3.100Kg	BLACK / NEGRO	1/4	1

- PROYECTORES LED SMD BASE 360°
- PROJECTORS LED SMD BASE 360°

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

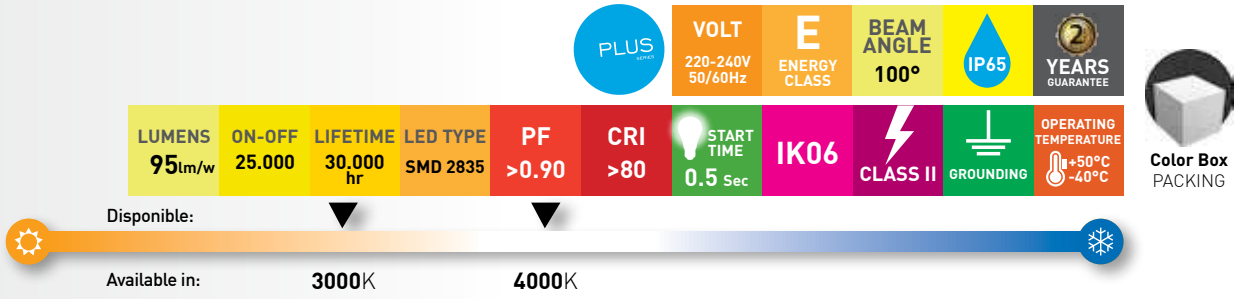



CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69701	5207227077203	10W	50mA	4000K	0.230Kg	GRAPHITE/GRAFITO	1/60	5
E.147-69702	5207227077234	10W	50mA	3000K	0.230Kg	GRAPHITE/GRAFITO	1/60	5
E.147-69704*	5207227077255	20W	100mA	4000K	0.350Kg	GRAPHITE/GRAFITO	1/40	1
E.147-69705*	5207227077272	20W	100mA	3000K	0.350Kg	GRAPHITE/GRAFITO	1/40	1




CODE	BARCODE	WATT	AMPERAGE	KELVIN	WEIGHT	COLOR	PACKING	MOQ
E.147-69707	5207227077296	30W	150mA	4000K	0.480Kg	GRAPHITE/GRAFITO	1/20	1
E.147-69708	5207227077326	30W	150mA	3000K	0.480Kg	GRAPHITE/GRAFITO	1/20	1
E.147-69710*	5207227077350	50W	250mA	4000K	0.670Kg	GRAPHITE/GRAFITO	1/20	1
E.147-69711*	5207227077371	50W	250mA	3000K	0.670Kg	GRAPHITE/GRAFITO	1/20	1



• PROYECTOR LED SMD CON SENSOR DIA/NOCHE
• PROJECTOR LED SMD WITH DAY / NIGHT SENSOR

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



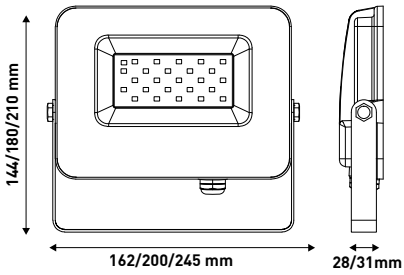

DAY & NIGHT SENSOR

30cm WIRE / CABLE

• Lights up automatically when the room light is below 30 LUX /
Se apaga automáticamente cuando la luz de la habitación supera los 50 LUX

• Switches off automatically when room light is over 50 LUX /
Se apaga automáticamente cuando la luz de la habitación supera los 50 LUX

PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 100° | IP65 | 2 YEARS GUARANTEE

LUMENS	ON-OFF	LIFETIME	LED TYPE	PF	CRI	START TIME	IK06				
85lm/w	25.000	30.000 hr	SMD 2835	>0.90	>80	0.5 Sec		CLASS I	2.5 m INSTALLATION HEIGHT	GROUNDING	OPERATING TEMPERATURE +50°C -40°C


Color Box
PACKING

Disponible:

Available in: **3000**K **4200**K


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69360	5207227067518	20W	100mA	6500K	162x144x28mm	0.410Kg	DARK GREY	1/30	1
E.147-69361	5207227067532	20W	100mA	4200K	162x144x28mm	0.410Kg	DARK GREY	1/30	1
E.147-69362	5207227067556	30W	150mA	6500K	200x180x28mm	0.620Kg	DARK GREY	1/20	1
E.147-69363	5207227067570	30W	150mA	4200K	200x180x28mm	0.620Kg	DARK GREY	1/20	1
E.147-69364	5207227067594	50W	250mA	6500K	245x210x31mm	0.920Kg	DARK GREY	1/10	1
E.147-69365	5207227067662	50W	250mA	4200K	245x210x31mm	0.920Kg	DARK GREY	1/10	1

• PROYECTORES LED SMD 12/24Vdc
• PROJECTORS LED SMD 12/24Vdc



30cm WIRE / CABLE

VOLT 12/24V DC



PLUS | F ENERGY CLASS | BEAM ANGLE 100° | IP65 | 2 YEARS GUARANTEE

LUMENS	ON-OFF	LIFETIME	LED TYPE	PF	CRI	START TIME	IK06				
85lm/w	25.000	30.000 hr	SMD 2835	>0.60	>80	0.5 Sec		CLASS II	2.5 m INSTALLATION HEIGHT	GROUNDING	OPERATING TEMPERATURE +50°C -40°C


Color Box
PACKING

Disponible:


Available in: **4000**K

OLD CODE	NEW CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69380	E.147-69383*	5207227070174	10W	1000mA	4000K	162x147x36mm	0.670Kg	BLACK	1/40	1
E.147-69381	E.147-69384*	5207227070198	20W	2000mA	4000K	181x162x36mm	0.750Kg	BLACK	1/20	1
E.147-69382	E.147-69385*	5207227070211	30W	3000mA	4000K	235x205x36mm	1.250Kg	BLACK	1/10	1

*LOS NUEVOS CÓDIGOS ESTARÁN DISPONIBLES DESPUÉS DE AGOTAR EXISTENCIAS DE LOS ANTIGUOS / THE NEW CODES WILL BE AVAILABLE AFTER THE STOCK OUT OF THE OLD ONES

- PROYECTORES LED SMD CON DETECTOR DE MOVIMIENTO GIRATORIO
- PROJECTORS LED SMD WITH ROTATED MOVEMENT DETECTOR

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**

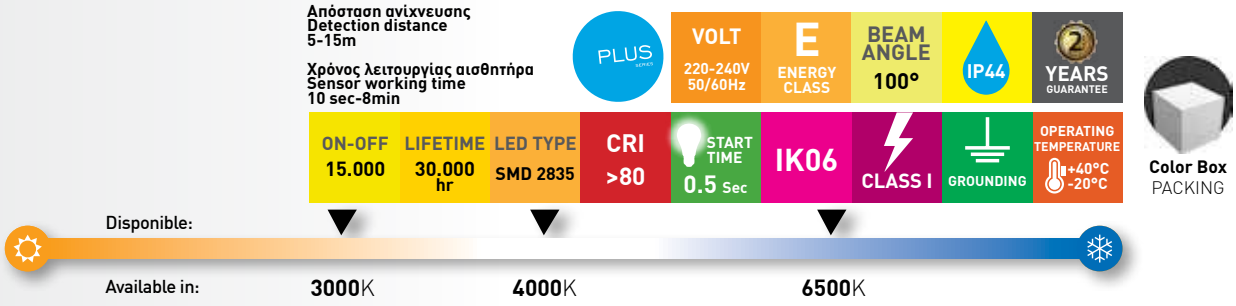




30cm WIRE / CABLE

1.8-2.5 m INSTALLATION HEIGHT

160x50x115mm

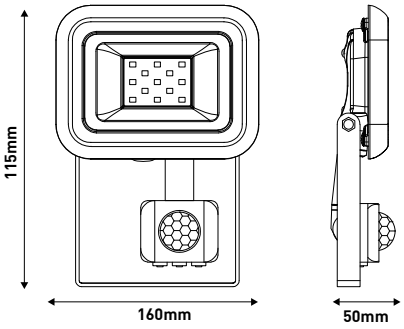


CODE	BARCODE	WATT	AMPERAGE	KELVIN	LUMEN/WATT	WEIGHT	COLOR	PACKING	MOQ
E.147-69630	5207227058325	10W	50mA	6500K	105 lm/watt	0.280Kg	BLACK	1/40	1
E.147-69631	5207227058349	10W	50mA	4000K	105 lm/watt	0.280Kg	BLACK	1/40	1
E.147-69632	5207227058363	10W	50mA	3000K	95 lm/watt	0.280Kg	BLACK	1/40	1
E.147-69650	5207227109652	10W	50mA	6500K	105 lm/watt	0.280Kg	WHITE	1/40	1
E.147-69651	5207227109676	10W	50mA	4000K	105 lm/watt	0.280Kg	WHITE	1/40	1



30cm WIRE / CABLE

1.8-2.5 m INSTALLATION HEIGHT

180x50x137mm

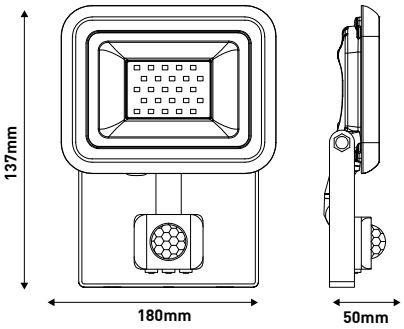


CODE	BARCODE	WATT	AMPERAGE	KELVIN	LUMEN/WATT	WEIGHT	COLOR	PACKING	MOQ
E.147-69633	5207227058387	20W	100mA	6500K	105 lm/watt	0.380Kg	BLACK	1/20	1
E.147-69634	5207227058400	20W	100mA	4000K	105 lm/watt	0.380Kg	BLACK	1/20	1
E.147-69635	5207227058424	20W	100mA	3000K	95 lm/watt	0.380Kg	BLACK	1/20	1
E.147-69653	5207227109690	20W	100mA	6500K	105 lm/watt	0.380Kg	WHITE	1/20	1
E.147-69654	5207227109713	20W	100mA	4000K	105 lm/watt	0.380Kg	WHITE	1/20	1








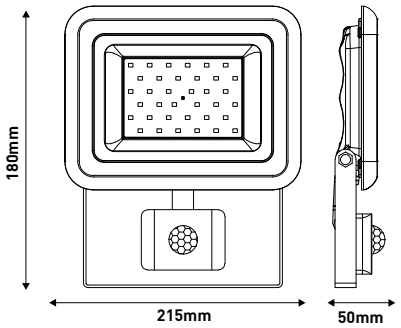

CODE	BARCODE	WATT	AMPERAGE	KELVIN	LUMEN/WATT	WEIGHT	COLOR	PACKING	MOQ
E.147-69636	5207227058448	30W	150mA	6500K	105 lm/watt	0.620Kg	BLACK	1/20	1
E.147-69637	5207227058462	30W	150mA	4000K	105 lm/watt	0.620Kg	BLACK	1/20	1
E.147-69638	5207227058486	30W	150mA	3000K	95 lm/watt	0.620Kg	BLACK	1/20	1
E.147-69656	5207227109737	30W	150mA	6500K	105 lm/watt	0.620Kg	WHITE	1/20	1
E.147-69657	5207227109751	30W	150mA	4000K	105 lm/watt	0.620Kg	WHITE	1/20	1





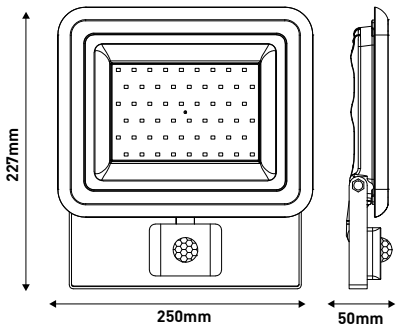

CODE	BARCODE	WATT	AMPERAGE	KELVIN	LUMEN/WATT	WEIGHT	COLOR	PACKING	MOQ
E.147-69642	5207227058509	50W	250mA	6500K	105 lm/watt	0.940Kg	BLACK	1/10	1
E.147-69643	5207227058523	50W	250mA	4000K	105 lm/watt	0.940Kg	BLACK	1/10	1
E.147-69644	5207227058547	50W	250mA	3000K	95 lm/watt	0.940Kg	BLACK	1/10	1
E.147-69659	5207227109775	50W	250mA	6500K	105 lm/watt	0.940Kg	WHITE	1/10	1
E.147-69660	5207227109799	50W	250mA	4000K	105 lm/watt	0.940Kg	WHITE	1/10	1



- PROYECTORES LED SMD
- PROJECTORS LED SMD


MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

30cm WIRE / CABLE



BLUE

GREEN



PLUS | VOLT 220-240V 50/60Hz | BEAM ANGLE 100° | IP65 | 2 YEARS GUARANTEE

LUMENS 70lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.80 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS II | 2.5 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -40°C




Color Box
PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69270	5206139014351	10W	50mA	GREEN	127x113x22mm	0.230Kg	BLACK	1/60	1
E.147-69271	5206139014368	20W	100mA	GREEN	162x136x24mm	0.350Kg	BLACK	1/40	1
E.147-69273	5207227149504	30W	150mA	BLUE	192x157x25mm	0.480Kg	BLACK	1/20	1

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

RGB



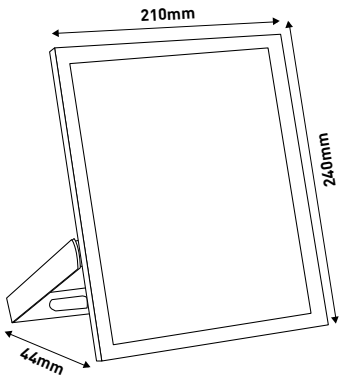

PLUS | VOLT 100-265V 50/60Hz | BEAM ANGLE 120° | IP66 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK07 | CLASS I | 5-8 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +45°C -25°C



White Box with Sticker
PACKING


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69390	5207227068782	50W	560mA	RGB	240x210x44mm	1.253Kg	BLACK	1/10	1



• PROYECTORES LED SMD PORTATIL
• PROJECTORS LED SMD MOVABLE

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**





1.50m WIRE / CABLE

PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 80lm/w | ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK07 | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C



White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69370	5207227068744	10W	48mA	4000K	146x164x240mm	0.770Kg	BLACK	1/20	1
E.147-69372	5207227068768	30W	145mA	4000K	183x189x280mm	1.169Kg	BLACK	1/10	1

• PROYECTORES LED COB RECARGABLES
• PROJECTORS LED COB RECHARGEABLE

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO & HIERRO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC & IRON**





CAR ADAPTOR

BATTERY TYPE: 18650 Lithium 3,7V
Charging cable: 8,4V 1A

PLUS | VOLT 100-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

3h CHARGING TIME | 4-5h DISCHARGE TIME | LUMENS 85lm/w | ON-OFF 25.000 | LIFETIME 25.000 hr | LED TYPE COB 30 | PF >0.60 | CRI >70 | START TIME 3 Sec | IK08 | OPERATING TEMPERATURE +50°C -20°C



Color Box PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69240	5206139050212	10W	260mA	4000K	265x135x126mm	0.950Kg	YELLOW	1/20	1
E.147-69241	5206139050236	20W	260mA	4000K	298x160x184mm	1.500Kg	YELLOW	1/10	1



E.147-22422



E.147-22420
E.147-22421



White Box with Sticker PACKING


• BASES PARA PROYECTORES
• BASES FOR PROJECTORS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.147-22422	5206139044891	BASE FOR LED PROJECTOR 3 LEGS 10-50W YELLOW 960x1500mm TRIPODE PARA PROYECTOR LED 10-50W AMARILLO 960x1500mm	1.000Kg	1/6	1
E.147-22420	5206139044914	BASE FOR LED PROJECTOR 20W YELLOW 265x205x75mm BASE PARA PROYECTORES LED 20W AMARILLO 265x205x75mm	0.500Kg	1/20	1
E.147-22421	5206139044945	BASE FOR LED PROJECTOR 50W YELLOW 345x280x105mm BASE PARA PROYECTORES LED 50W AMARILLO 345x280x105mm	1.020Kg	1/20	1

- PROYECTORES LED SMD SOLAR
- PROJECTORS LED SMD SOLAR

MATERIAL DE PRODUC**CION: ALUMINIO Y PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

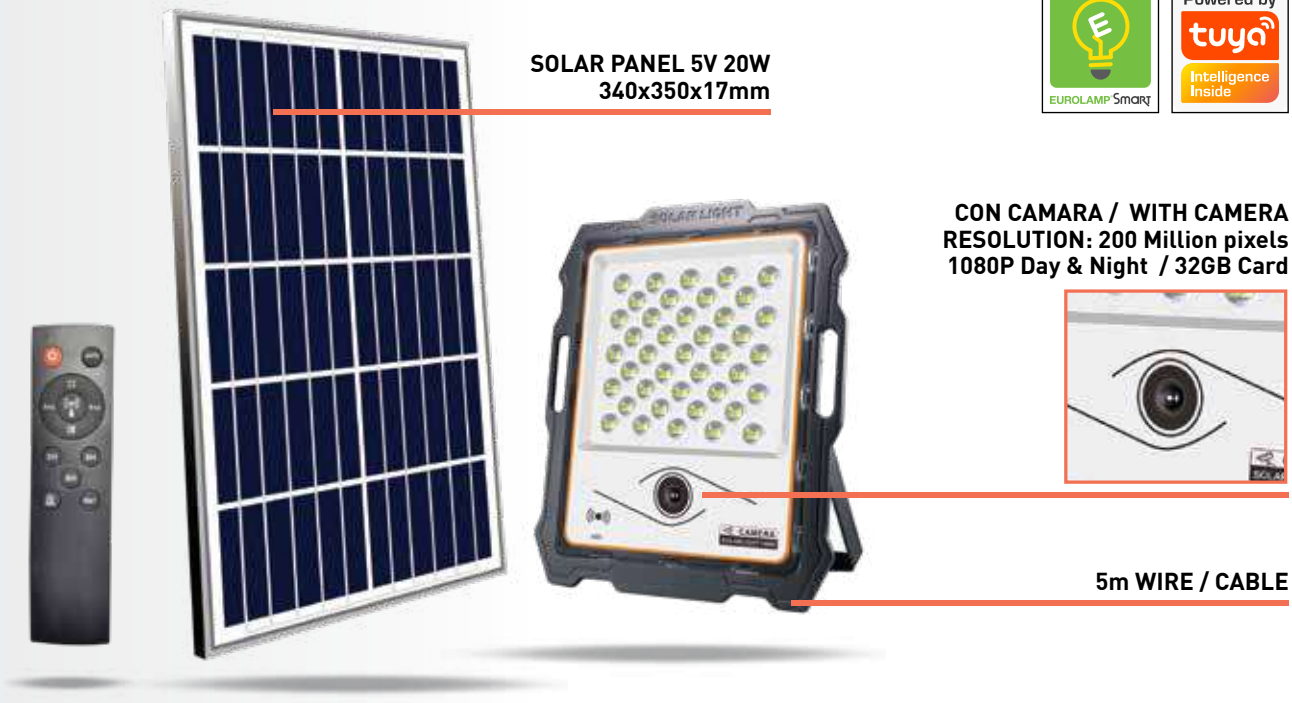

EUROLAMP Smart

Powered by tuya Intelligence Inside

PLUS

VOLT 5V DC | BATTERY Lithium 12000mAh | 4-6h CHARGING TIME | 12-18h DISCHARGE TIME | BEAM ANGLE 90° | IP65 | 2 YEARS GUARANTEE

LUMENS 73lm/w | ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.80 | CRI >80 | START TIME 0.5 Sec | IK07 | 5-8 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -25°C




Color Box
PACKING

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69594	5207227116735	100W	6500K	179x217x45mm	2.500Kg	BLACK	1/8	1



- PROYECTORES LED SMD SOLAR
- PROJECTORS LED SMD SOLAR

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

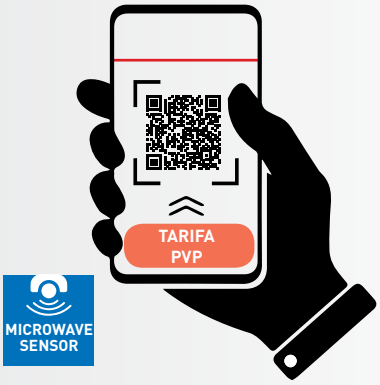

MICROWAVE SENSOR

WITH MOVEMENT DETECTOR & DETECTION DISTANCE 6-8m


CON DETECTOR DE MOVIMIENTO & DISTANCIA DE DETECCION 6-8m

SOLAR PANEL 5V 32W 340x570x25mm

2m WIRE / CABLE





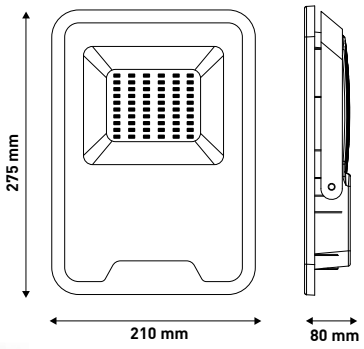

PLUS

VOLT	BATTERY	4-5h	10-20h	BEAM ANGLE		
5V DC	Lithium 22000mAh	CHARGING TIME	DISCHARGE TIME	120°	IP66	2 YEARS GUARANTEE

LUMENS	ON-OFF	LIFETIME	LED TYPE	PF	CRI	START TIME	IK07	INSTALLATION HEIGHT	OPERATING TEMPERATURE
85lm/w	15.000	30.000 hr	SMD 5630	>0.80	>80	0.5 Sec		5-8 m	+45°C -25°C



White Box with Sticker
PACKING

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69593	5207227068836	30W	6500K	80x275x210mm	5.500Kg	WHITE	1/6	1



- PROYECTORES LED SMD SOLAR
- PROJECTORS LED SMD SOLAR

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



PLUS

VOLT 5V DC | BATTERY Lithium 6000mAh | 5-6h CHARGING TIME | 10-12h DISCHARGE TIME | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 0.5 Sec | IK07 | 3-5 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -25°C



White Box with Sticker
PACKING

CODE	BARCODE	WATT	LUMEN	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69580	5207227158834	20W	1500 lm	4000K	210x176x42 mm	13.000 kg	GREY	1/5	1
E.147-69581	5207227158841	50W	3750 lm	4000K	210x176x43 mm	13.000 kg	GREY	1/5	1
E.147-69582	5207227158858	100W	5500 lm	4000K	270x211x43 mm	20.000 kg	GREY	1/5	1



- PROYECTORES LED SMD SOLAR
- PROJECTORS LED SMD SOLAR

MATERIAL DE PRODUCCION: **ALUMINIO Y CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

SOLAR PANEL
E.147-69583 / 5V 200W 450x350x17mm
E.147-69584 / 5V 300W 350x600x25mm
E.147-69585 / 5V 400W 670x445x25mm
E.147-69586 / 5V 500W 670x535x25mm

2m WIRE / CABLE



PLUS | VOLT 5V DC | BATTERY Lithium 20000mAh | 5-6h CHARGING TIME | 10-12h DISCHARGE TIME | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 0.5 Sec | IK07 | 4-6 6-8* m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -25°C




White Box with Sticker
PACKING

CODE	BARCODE	WATT	LUMEN	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-69583	5207227158865	200W	11.000 lm	4000K	284x351x43 mm	24.000 kg	GREY	1/4	1
E.147-69584	5207227158872	300W	16.000 lm	4000K	284x351x43 mm	26.000 kg	GREY	1/3	1
E.147-69585*	5207227158889	400W	22.000 lm	4000K	319x395x63 mm	19.000 kg	GREY	1/2	1
E.147-69586*	5207227160448	500W	28.000 lm	4000K	319x395x63 mm	25.000 kg	GREY	1/2	1

- PROYECTORES LED SMD
- PROJECTORS LED SMD

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**

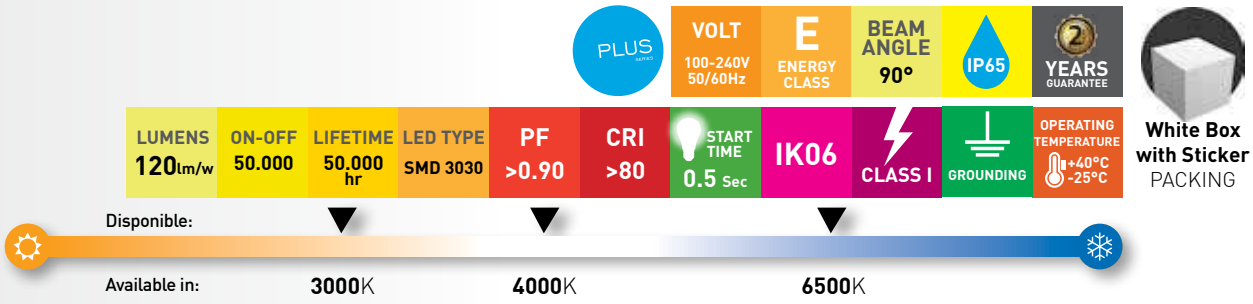


White Box with Sticker PACKING



25cm WIRE / CABLE

10-15 m INSTALLATION HEIGHT

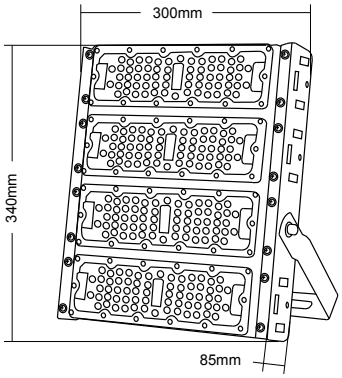


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.146-69000	5207227110900	200W	950mA	6500K	300x340x85mm	4.750Kg	BLACK	1/2	1
E.146-69001	5207227110917	200W	950mA	5000K	300x340x85mm	4.750Kg	BLACK	1/2	1
E.146-69002	5207227110924	200W	950mA	4000K	300x340x85mm	4.750Kg	BLACK	1/2	1



25cm WIRE / CABLE

15-20 m INSTALLATION HEIGHT

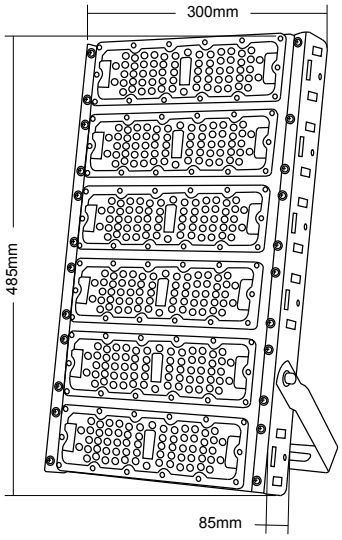


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.146-69003	5207227110931	300W	1700mA	6500K	300x485x85mm	6.000Kg	BLACK	1/2	1
E.146-69004	5207227110948	300W	1700mA	5000K	300x485x85mm	6.000Kg	BLACK	1/2	1
E.146-69005	5207227110955	300W	1700mA	4000K	300x485x85mm	6.000Kg	BLACK	1/2	1



25cm WIRE / CABLE








CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.146-69006	5207227110962	400W	2100mA	6500K	580x340x85mm	9.000Kg	BLACK	1/1	1
E.146-69007	5207227110979	400W	2100mA	5000K	580x340x85mm	9.000Kg	BLACK	1/1	1
E.146-69008	5207227110986	400W	2100mA	4000K	580x340x85mm	9.000Kg	BLACK	1/1	1



25cm WIRE / CABLE



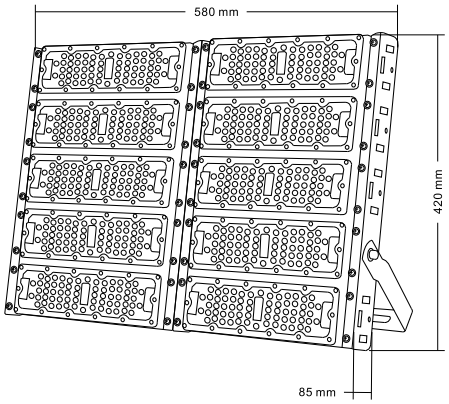

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.146-69009	5207227110993	500W	2400mA	6500K	580x420x85mm	10.700Kg	BLACK	1/1	1
E.146-69010	5207227111006	500W	2400mA	5000K	580x420x85mm	10.700Kg	BLACK	1/1	1
E.146-69011	5207227111013	500W	2400mA	4000K	580x420x85mm	10.700Kg	BLACK	1/1	1



- PROYECTORES LED SMD MODULAR
- PROJECTORS LED SMD MODULAR

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**



8 m INSTALLATION HEIGHT

PLUS | VOLT 100-305V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 30° | IP66 | 5 YEARS GUARANTEE

LUMENS 130lm/w | ON-OFF 25.000 | LIFETIME 50.000 hr | LED TYPE SMD 3030 | PF >0.98 | CRI >70 | START TIME 0.5 Sec | IK08 | CLASS I | GROUNDING | FLICKER FREE | OPERATING TEMPERATURE +50°C -30°C



Brown Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	PACKING	MOQ
E.146-69100	5207227035319	250W	115V/2,2A-230V/1,1A	5700K	483x296x1345mm	5.960Kg	1/1	1
E.146-69101	5207227035326	250W	115V/2,2A-230V/1,1A	4000K	483x296x1345mm	5.960Kg	1/1	1

- BRAZOS DE SOPORTE PARA PROYECTOR MODULAR
- BRACKET ARMS FOR MODULAR PROJECTORS



5 YEARS GUARANTEE




Brown Box with Sticker PACKING

CODE	BARCODE	TYPE	WEIGHT	COLOR	PACKING	MOQ
E.146-69110	5207227035333	MONO/SINGLE	1.000Kg	BLACK	1/1	1
E.146-69111	5207227035340	DOBLE/DOUBLE	7.200Kg	BLACK	1/1	1
E.146-69112	5207227035357	TRIPLE/TRIPLE	8.900Kg	BLACK	1/1	1
E.146-69113	5207227035364	CUADRUPLE/QUADRUPLE	13.650Kg	BLACK	1/1	1
E.146-69114	5207227124242	QUINTUPLE/FIVEFOLD	13.650Kg	BLACK	1/1	1




• BRAZOS DE SOPORTE PARA PROYECTOR MODULAR
• BRACKET ARMS FOR MODULAR PROJECTORS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

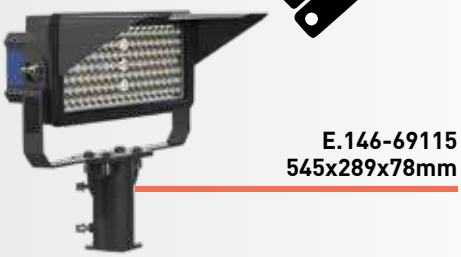

E.146-69115
545x289x78mm

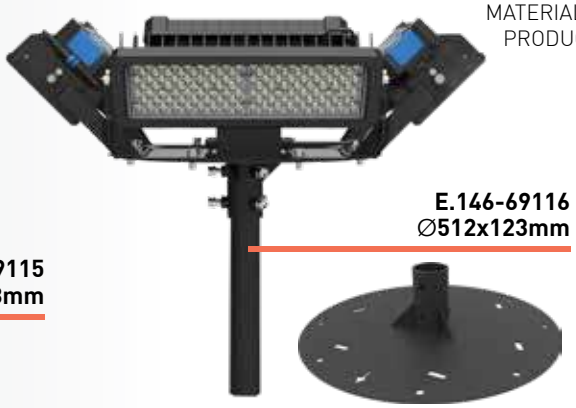

E.146-69116
Ø512x123mm

5 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.146-69115	5207227035371	MOUNT KIT TRIPLE KNUCKLE 750W BLACK KIT MONTAJE TRIPLE KNUCKLE 750W NEGRO	7.900Kg	1/1	1
E.146-69116	5207227035388	PARKING MOUNT QUADRUPLE LUMOSA TINY 1000W BLACK SOPORTE APARCAMIENTO TORRE CUADRUPLE 1000W NEGRO	6.000Kg	1/1	1

• LASER FOR ADJUSTMENT MODULAR PROJECTOR
• LASER PARA AJUSTE DE PROYECTOR MODULAR



VOLT 3.7V DC | BATTERY 16340 | OPERATING TEMPERATURE +50°C -10°C | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DESCRIPTION	WEIGHT	PACKING	MOQ
E.146-69117	5207227035395	LAZER FOR ADJUSTMENT MODULAR PROJECTOR 250W LASER PARA AJUSTE DE PROYECTOR MODULAR 250W	0.230Kg	1/1	1



- RECESSED LED LIGHTS FOR GAS STATIONS
- LUMINARIA LED EMPOTRABLE PARA GASOLINERAS

MATERIAL DE PRODUCCION: **SPCC & POLICARBONATO**
PRODUCTION MATERIAL: **SPCC & POLYCARBONATE**



VOLT 100-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 5 YEARS GUARANTEE

LUMENS 130lm/w | ON-OFF 25.000 | LIFETIME 50.000 hr | LED TYPE SMD 3030 | PF >0.92 | CRI >80 | START TIME 1 Sec | IK07 | CLASS I | GROUNDING | FLICKER FREE | OPERATING TEMPERATURE +50°C -30°C


White Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-56321	5207227059155	75W	1440mA	5000K	400x400x76mm	2.450Kg	WHITE	1/1	1

- DETECTOR DE MOVIMIENTO
- MOVEMENT DETECTOR

MATERIAL DE PRODUCCION: **PLASTICO & METALICO**
PRODUCTION MATERIAL: **PLASTIC & METALLIC**



When motion detected, but sufficient daylight, light remains OFF. When motion detected, insufficient daylight, light ON. After the stand-by period, light is OFF.

Cuando se detecta movimiento con luz suficiente, la luz permanece apagada. Cuando se detecta movimiento con luz insuficiente, la luz enciende. Después del tiempo de espera, la luz se apaga.

Distancia deteccion: 6-12m
Detection distance: 6-12m

VOLT 220-240V 50/60Hz | BEAM ANGLE 220° | ON-OFF 25.000 | LIFETIME 50.000 hr | START TIME 0.5 Sec | IK07 | OPERATING TEMPERATURE +70°C -35°C | IP65 | 5 YEARS GUARANTEE


White Box with Sticker PACKING

CODE	BARCODE	WATT	DIMENSIONS	COLOR	PACKING	MOQ
E.147-56322	5207227059162	1200W	Ø80x70mm	GREY	1/1	1







- FAROLAS LED
- Street Lights LED





Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Ideal para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- FAROLAS LED SMD SOLARES
- SOLAR STREET LIGHTS LED SMD

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

BATTERY TYPE: Lithium: 3.2V
6.000/9.000/12.000 mAh

E.200-57803 / E.200-57804


E.200-57808 / E.200-57808

MOVEMENT SENSOR


En modo standby, encenderá al 30%, cuando detecta movimiento encenderá 100%.

In Standby mode, the function is at 30%,
and in case of detection, the function is at 100%.



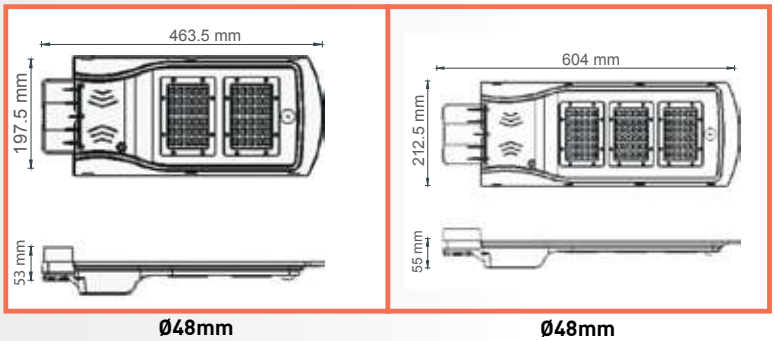

Ø48mm **Ø48mm**

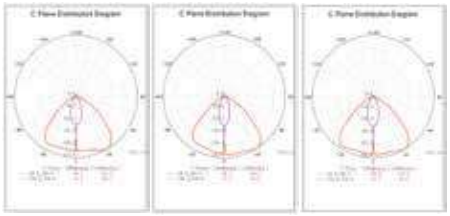

PLUS | VOLT 6V DC | 5-6h CHARGING TIME | 12h DISCHARGE TIME | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 85lm/w | LIFETIME 50.000 hr | LED TYPE SMD 5730 | CRI >80 | START TIME 0.1 Sec | IK07 | CLASS III | 3-7 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -25°C



Brown Box with Sticker PACKING

Disponible en:

Available in: **4000**K **6000**K

CODE	BARCODE	WATT	FULL OPERATION	STANDBY 30%	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.200-57803	5207227122804	40W	3400 lm	1020 lm	6000K	**495x240x70mm**	9.000Kg	GREY	1/5	1
E.200-57804	5207227107221	40W	3400 lm	1020 lm	4000K	**495x240x70mm**	9.000Kg	GREY	1/5	1
E.200-57808	5207227107214	60W	5100 lm	1530 lm	6000K	**635x260x70mm**	12.000Kg	GREY	1/5	1
E.200-57809	5207227107238	60W	5100 lm	1530 lm	4000K	**635x260x70mm**	12.000Kg	GREY	1/5	1




• FAROLAS LED SMD
• STREET LIGHTS LED SMD

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

Ø50mm 146-57001 ~ 146-57005
Ø60mm 146-57006 ~ 146-57011





VALUE | VOLT 220-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 150° | IP65 | 2 YEARS GUARANTEE

LUMENS 110lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >70 | START TIME 0.5 Sec | IK08 | CLASS II | 6-10 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -40°C



Brown Box with Sticker PACKING

Disponible en:

Available in: **3000**K **4000**K **6500**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
146-57001	5207227039423	30W	150mA	4000K	**322x142x66mm**	0.550Kg	GREY	1/1	1
146-57002	5207227039430	30W	150mA	3000K	**322x142x66mm**	0.550Kg	GREY	1/1	1
146-57003	5207227029967	50W	250mA	6500K	**402x177x66mm**	0.950Kg	GREY	1/1	1
146-57004	5207227029974	50W	250mA	4000K	**402x177x66mm**	0.950Kg	GREY	1/1	1
146-57005	5207227039447	50W	250mA	3000K	**402x177x66mm**	0.950Kg	GREY	1/1	1
146-57006	5207227029981	70W	500mA	6500K	**493x222x67.5mm**	1.600Kg	GREY	1/1	1
146-57007	5207227029998	70W	500mA	4000K	**493x222x67.5mm**	1.600Kg	GREY	1/1	1
146-57009	5207227030000	100W	500mA	6500K	**493x222x67.5mm**	1.650Kg	GREY	1/1	1
146-57010	5207227030017	100W	500mA	4000K	**493x222x67.5mm**	1.650Kg	GREY	1/1	1
146-57011	5207227033100	100W	500mA	3000K	**493x222x67.5mm**	1.650Kg	GREY	1/1	1




- FAROLAS LED SMD
- STREET LIGHTS LED SMD

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM &PC**

Ø50mm 146-57036 ~ 146-57041
Ø60mm 146-57042 ~ 146-57047





PLUS | VOLT 85-265V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 140lm/w | ON-OFF 25.000 | LIFETIME 50,000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS I | 6-10 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -40°C



Brown Box with Sticker PACKING

Disponible en:

Available in: **4000**K **6500**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
146-57036	5207227073595	60W	300mA	6500K	**430x150x62mm**	1.050Kg	GREY	1/1	1
146-57037	5207227073601	60W	300mA	4000K	**430x150x62mm**	1.050Kg	GREY	1/1	1
146-57039	5207227073625	90W	450mA	6500K	**450x150x62mm**	1.150Kg	GREY	1/1	1
146-57040	5207227073632	90W	450mA	4000K	**450x150x62mm**	1.150Kg	GREY	1/1	1
146-57042	5207227073656	120W	600mA	6500K	**565x180x72mm**	1.500Kg	GREY	1/1	1
146-57043	5207227073663	120W	600mA	4000K	**565x180x72mm**	1.500Kg	GREY	1/1	1
146-57045	5207227073687	150W	700mA	6500K	**590x180x72mm**	1.850Kg	GREY	1/1	1
146-57046	5207227073694	150W	700mA	4000K	**590x180x72mm**	1.850Kg	GREY	1/1	1






• Campanas LED
para uso PROFESIONAL

• High Bay LED
for professional use



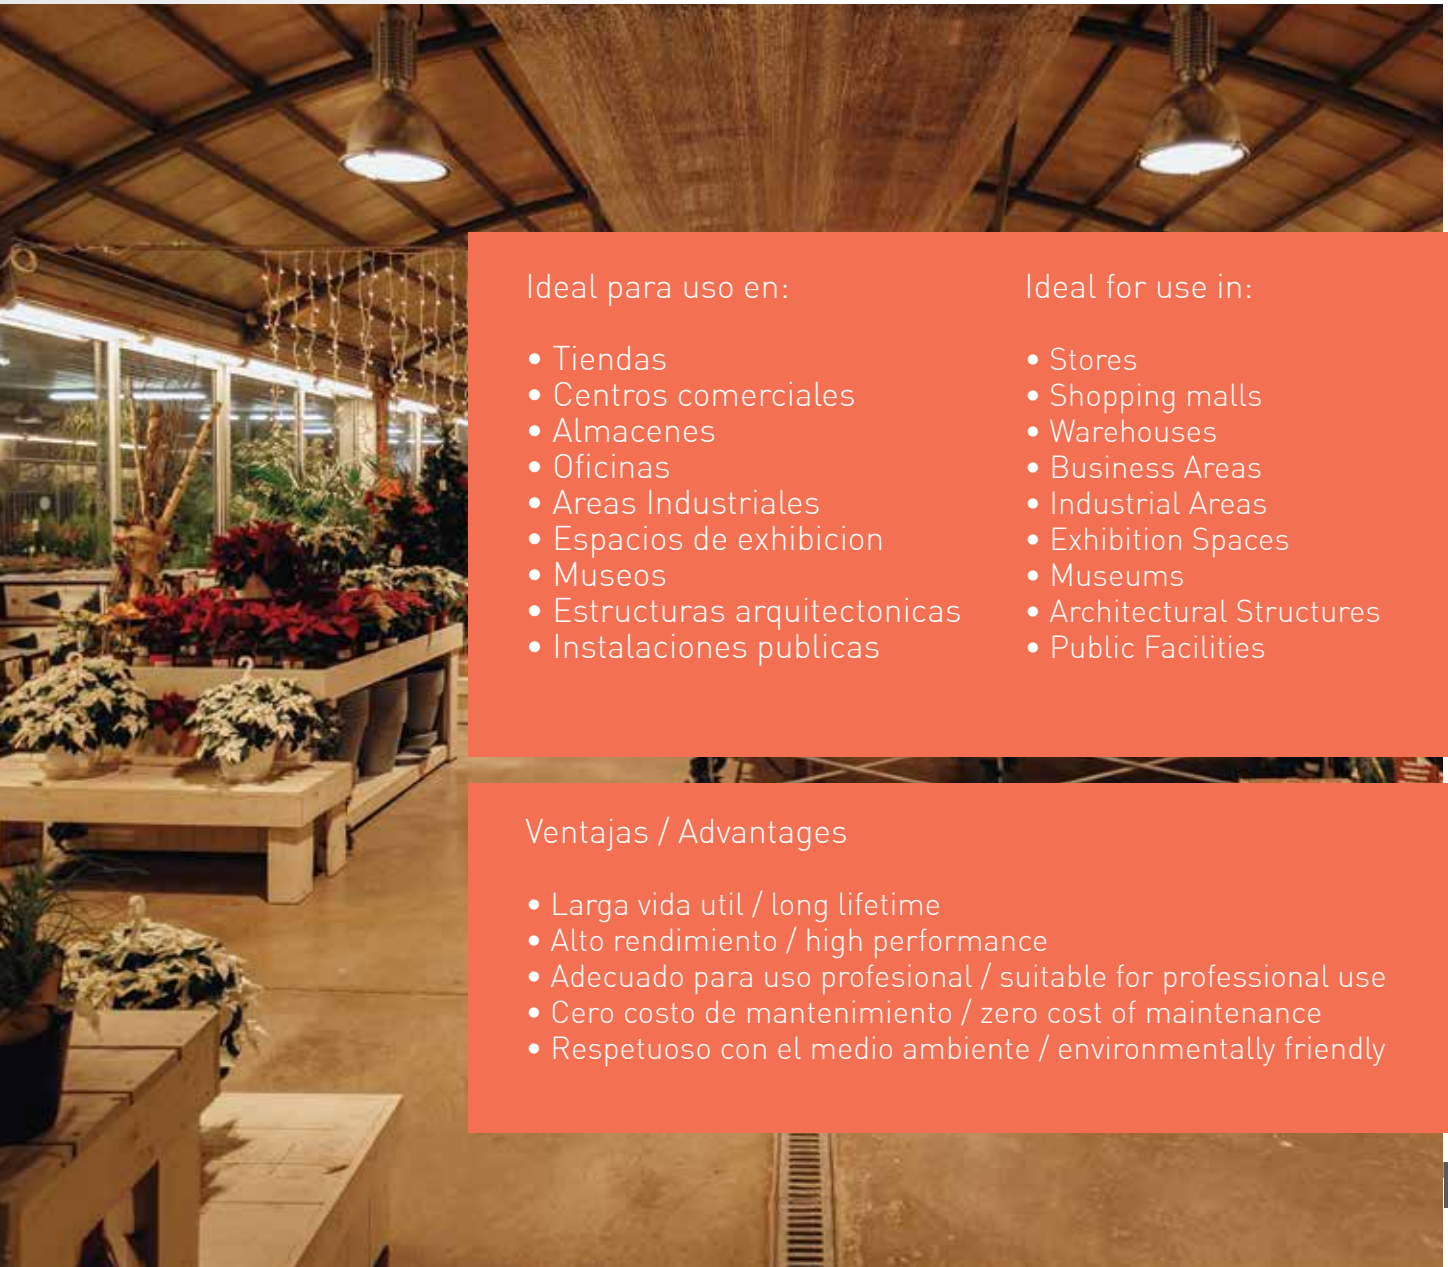

Ideal para uso en:

- Tiendas
- Centros comerciales
- Almacenes
- Oficinas
- Areas Industriales
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Stores
- Shopping malls
- Warehouses
- Business Areas
- Industrial Areas
- Exhibition Spaces
- Museums
- Architectural Structures
- Public Facilities


Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso profesional / suitable for professional use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- CAMPANA INDUSTRIAL LED SMD UFO
- HIGH BAY LED SMD UFO

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**



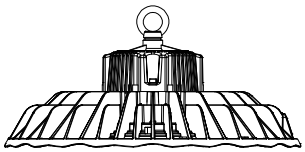



White Box with Sticker PACKING

PLUS | VOLT 100-240V 50/60Hz | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

LUMENS 120lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS II | 5-12 m INSTALLATION HEIGHT | GROUNDING | OPERATING TEMPERATURE +50°C -40°C

Disponible en:

Available in: **4000**K **6500**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-67100	5207227028502	50W	250mA	6500K	**Ø220x117mm**	0.700Kg	BLACK	1/1	1
E.145-67101	5207227028519	50W	250mA	4000K	**Ø220x117mm**	0.700Kg	BLACK	1/1	1
E.145-67103	5207227028533	100W	500mA	6500K	**Ø280x130mm**	1.200Kg	BLACK	1/1	1
E.145-67104	5207227028540	100W	500mA	4000K	**Ø280x130mm**	1.200Kg	BLACK	1/1	1
E.145-67106	5207227028564	150W	750mA	6500K	**Ø360x140mm**	1.700Kg	BLACK	1/1	1
E.145-67107	5207227028571	150W	750mA	4000K	**Ø360x140mm**	1.700Kg	BLACK	1/1	1
E.145-67109	5207227028595	200W	1000mA	6500K	**Ø420x160mm**	2.400Kg	BLACK	1/1	1
E.145-67110	5207227028601	200W	1000mA	4000K	**Ø420x160mm**	2.400Kg	BLACK	1/1	1








• Iluminacion Exterior
para uso domestico y profesional

• Outdoor Lighting Fixtures
for domestic and professional use

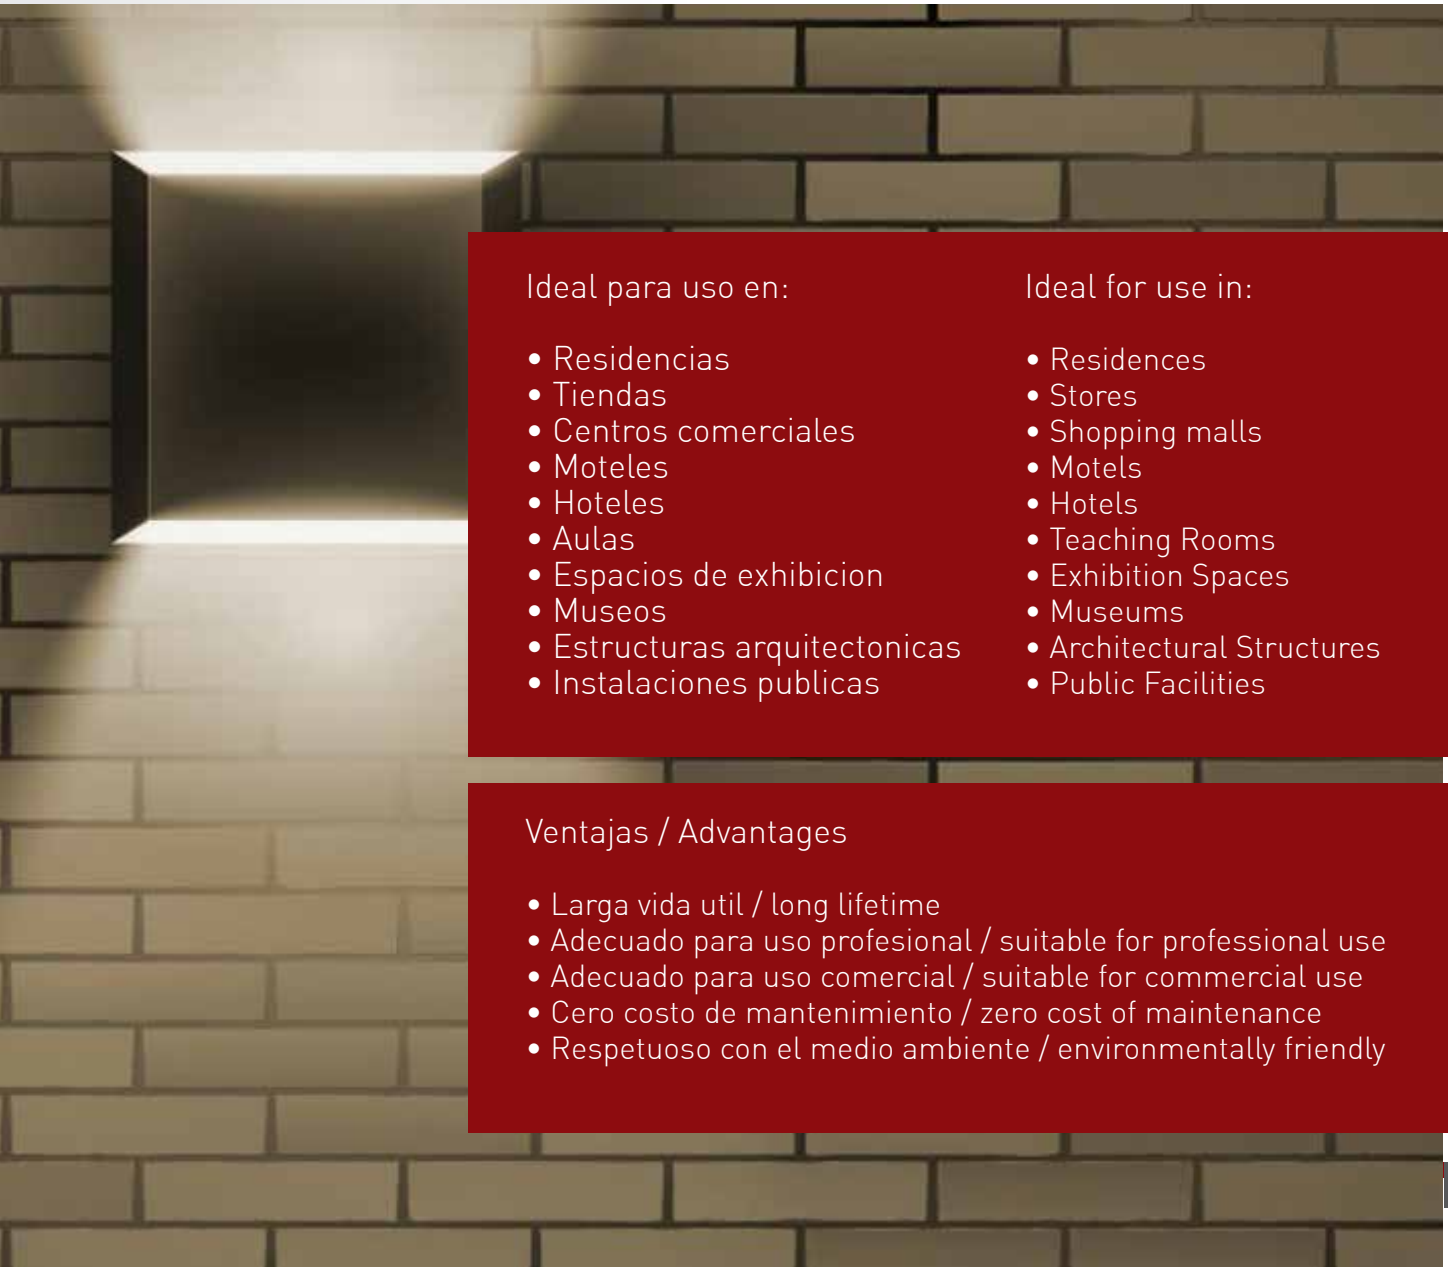

Ideal para uso en:

- Residencias
- Tiendas
- Centros comerciales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:


- Residences
- Stores
- Shopping malls
- Motels
- Hotels
- Teaching Rooms
- Exhibition Spaces
- Museums
- Architectural Structures
- Public Facilities

Ventajas / Advantages

- Larga vida util / long lifetime
- Adecuado para uso profesional / suitable for professional use
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- APLIQUE DE PARED SUPERFICIE
- MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**

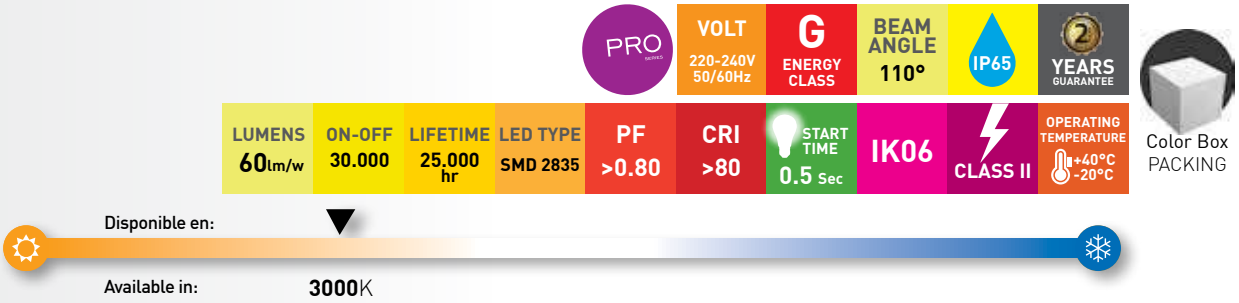

Disponible en:

Available in: **3000**K




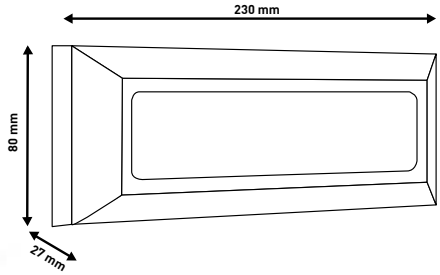

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52000	5207227014543	3W	31mA	3000K	230x80x27mm	0.230Kg	BLANCO / WHITE	1/20	1
E.145-52001	5207227014574	3W	31mA	3000K	230x80x27mm	0.230Kg	NEGRO / BLACK	1/20	1
E.145-52002	5207227014604	3W	31mA	3000K	230x80x27mm	0.230Kg	GRIS / GREY	1/20	1
E.145-52003	5207227014635	3W	31mA	3000K	230x80x27mm	0.230Kg	GRIS OS/DARK GREY	1/20	1

F
ENERGY CLASS



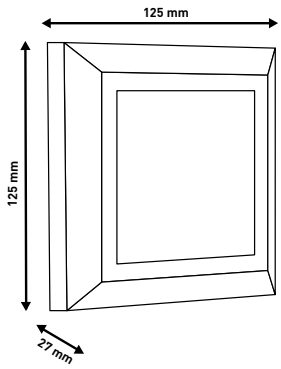

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52004	5207227014666	3W	28mA	3000K	125x125x27mm	0.200Kg	BLANCO / WHITE	1/20	1
E.145-52005	5207227014697	3W	28mA	3000K	125x125x27mm	0.200Kg	NEGRO / BLACK	1/20	1
E.145-52006	5207227014727	3W	28mA	3000K	125x125x27mm	0.200Kg	GRIS / GREY	1/20	1
E.145-52007	5207227014758	3W	28mA	3000K	125x125x27mm	0.200Kg	GRIS OS/DARK GREY	1/20	1



- APLIQUE DE PARED SUPERFICIE
- MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **PC & ABS**
PRODUCTION MATERIAL: **PC & ABS**

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.80 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C



Color Box PACKING

Disponible en:
Available in: **3000**K

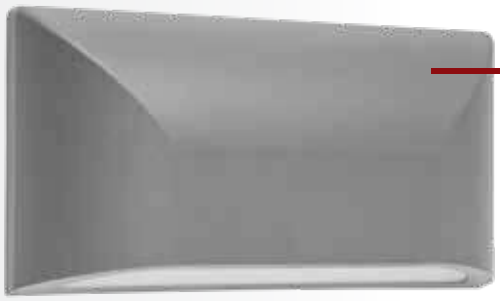


LUMENS **50**lm/w

BEAM ANGLE **107°**

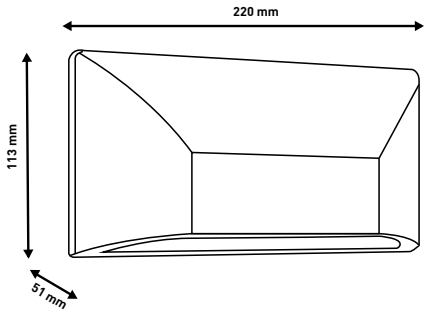


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52050	5207227116520	6W	50mA	3000K	220x113x51mm	0.370Kg	BLANCO / WHITE	1/20	1
E.145-52051	5207227116537	6W	50mA	3000K	220x113x51mm	0.370Kg	NEGRO / BLACK	1/20	1
E.145-52052	5207227116544	6W	50mA	3000K	220x113x51mm	0.370Kg	GRIS / GREY	1/20	1
E.145-52053	5207227116551	6W	50mA	3000K	220x113x51mm	0.370Kg	GRIS OS/DARK GREY	1/20	1

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**

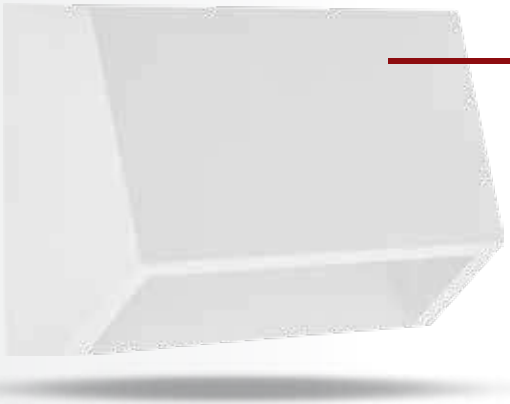

LUMENS **50**lm/w

BEAM ANGLE **50°**

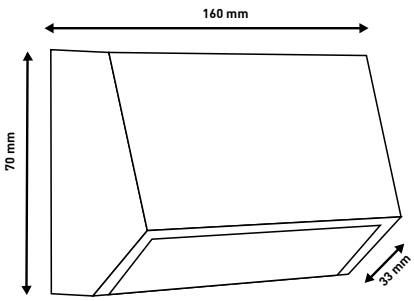

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52010	5207227014789	3W	33mA	3000K	160x70x33mm	0.130Kg	BLANCO / WHITE	1/20	1
E.145-52012	5207227014819	3W	33mA	3000K	160x70x33mm	0.130Kg	GRIS / GREY	1/20	1
E.145-52013	5207227014840	3W	33mA	3000K	160x70x33mm	0.130Kg	GRIS OS/DARK GREY	1/20	1

- APLIQUE DE PARED SUPERFICIE
- MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**


PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.80 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C

Color Box PACKING


Disponible en:

Available in: **3000**K

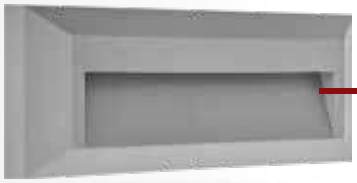

LUMENS **40**lm/w

BEAM ANGLE **33°**

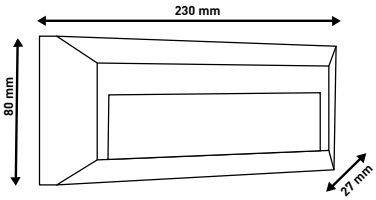


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52054	5207227116568	2W	16mA	3000K	230x80x27mm	0.300Kg	BLANCO / WHITE	1/20	1
E.145-52055	5207227116575	2W	16mA	3000K	230x80x27mm	0.300Kg	NEGRO / BLACK	1/20	1
E.145-52056	5207227116582	2W	16mA	3000K	230x80x27mm	0.300Kg	GRIS / GREY	1/20	1
E.145-52057	5207227116599	2W	16mA	3000K	230x80x27mm	0.300Kg	GRIS OSC/DARK GREY	1/20	1

E.145-52058
E.145-52059
E.145-52060
E.145-52061



LUMENS **45**lm/w

BEAM ANGLE **46°**




E.145-52021
E.145-52023
E.145-52024



LUMENS **27**lm/w

BEAM ANGLE **40°**



CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52058	5207227116605	1W	33mA	3000K	80x200x27mm	0.250Kg	BLANCO / WHITE	1/20	1
E.145-52059	5207227116612	1W	33mA	3000K	80x200x27mm	0.250Kg	NEGRO / BLACK	1/20	1
E.145-52060	5207227116629	1W	33mA	3000K	80x200x27mm	0.250Kg	GRIS / GREY	1/20	1
E.145-52061	5207227116636	1W	33mA	3000K	80x200x27mm	0.250Kg	GRIS OSC/DARK GREY	1/20	1
E.145-52021	5207227015052	3W	26mA	3000K	90x32x150mm	0.175Kg	BLANCO / WHITE	1/40	1
E.145-52023	5207227015083	3W	26mA	3000K	90x32x150mm	0.175Kg	GRIS / GREY	1/40	1
E.145-52024	5207227015113	3W	26mA	3000K	90x32x150mm	0.175Kg	GRIS OSC/DARK GREY	1/40	1



- APLIQUE DE PARED SUPERFICIE
- MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **PC & ABS**
PRODUCTION MATERIAL: **PC & ABS**

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

ON-OFF 30.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.80 | CRI >80 | START TIME 0.5 Sec | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C



Color Box
PACKING

Disponible en:
Available in: **3000**K

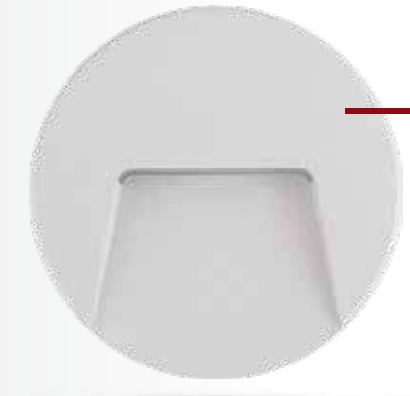

LUMENS **23**lm/w

BEAM ANGLE **30°**




CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52014	5207227014871	3W	30mA	3000K	ø135x32mm	0.175Kg	BLANCO / WHITE	1/40	1
E.145-52015	5207227014901	3W	30mA	3000K	ø135x32mm	0.175Kg	GRIS / GREY	1/40	1
E.145-52016	5207227014932	3W	30mA	3000K	ø135x32mm	0.175Kg	GRIS OSC/DARK GREY	1/40	1



LUMENS **27**lm/w


BEAM ANGLE **50°**

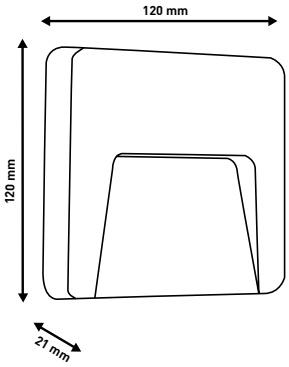


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52017	5207227014963	3W	30mA	3000K	120x120x21mm	0.183Kg	BLANCO / WHITE	1/40	1
E.145-52019	5207227014994	3W	30mA	3000K	120x120x21mm	0.183Kg	GRIS / GREY	1/40	1
E.145-52020	5207227015021	3W	30mA	3000K	120x120x21mm	0.183Kg	GRIS OSC/DARK GREY	1/40	1

- APLIQUE LED EMPOTRABLE
- MOUNTED RECESSED LED FIXTURES

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**

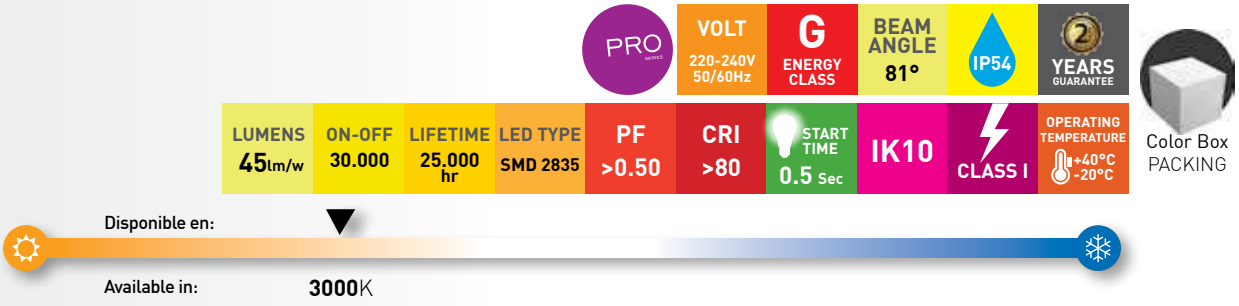






CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52500	5207227116643	3W	3000K	90x90x70mm	0.350Kg	NEGRO / BLACK	1/20	1
E.145-52501	5207227116650	3W	3000K	90x90x70mm	0.350Kg	GRIS OSC/DARK GREY	1/20	1



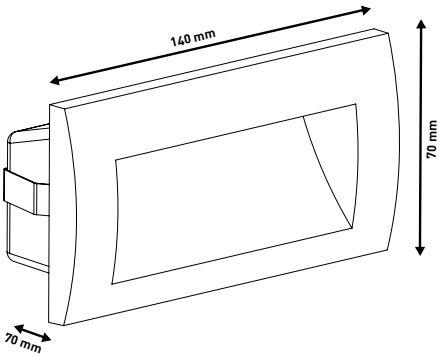

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52502	5207227116667	3W	3000K	140x70x70mm	0.400Kg	NEGRO / BLACK	1/20	1
E.145-52503	5207227116674	3W	3000K	140x70x70mm	0.400Kg	GRIS OSC/DARK GREY	1/20	1



• APLIQUE DE PARED SUPERFICIE
• MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**

PLUS | VOLT 220-240V 50/60Hz | G ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

ON-OFF 15.000 | LIFETIME 20.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +50°C -25°C



Color Box
PACKING

Disponible en:
Available in: **3000**K

LUMENS 25lm/w

BEAM ANGLE 75°





CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52100	5207227062605	2W	18mA	3000K	90x120x12mm	0.070Kg	BLANCO/WHITE	1/50	1
E.145-52101	5207227062629	3W	27mA	3000K	120x120x12mm	0.080Kg	BLANCO/WHITE	1/50	1




LUMENS 25lm/w

BEAM ANGLE 75°



CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52102	5207227062582	2W	18mA	3000K	90x120x12mm	0.070Kg	BLANCO/WHITE	1/50	1

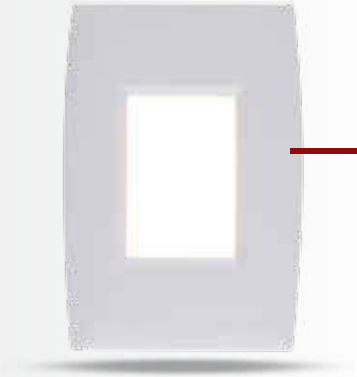


57x38x30mm CUTTING DIMENSION

EMPOTRADO PARA PLACAS DE YESO
RECESSED FOR PLASTERBOARD

LUMENS 35lm/w


BEAM ANGLE 115°





CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52103	5207227062643	2W	18mA	3000K	83x123x35mm	0.090Kg	BLANCO/WHITE	1/50	1

- APLIQUE DE PARED LED SUPERFICIE
- WALL MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

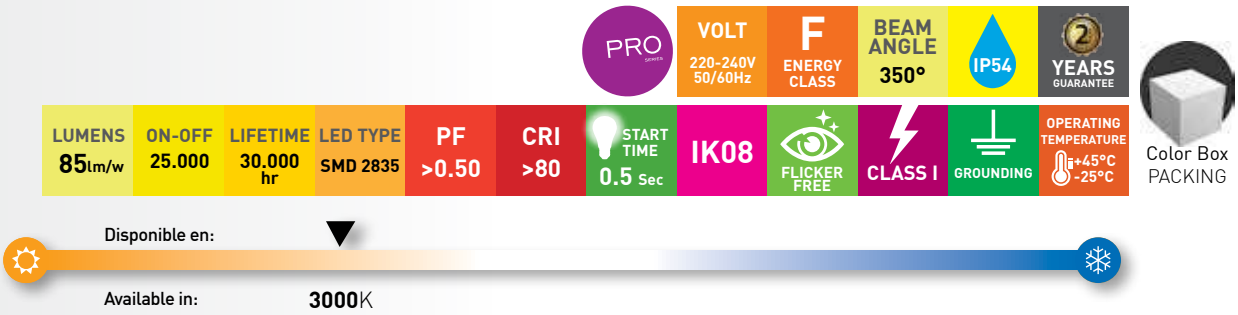


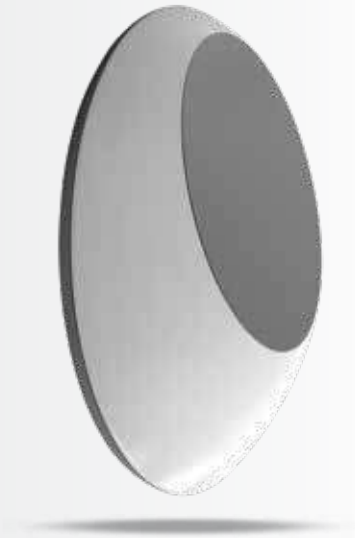

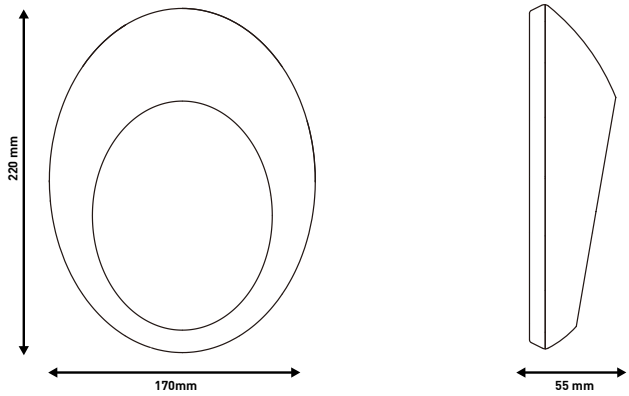

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20208	5207227062766	12W	180mA	3000K	**220x170x55mm**	0.650Kg	DARK GREY	1/8	1

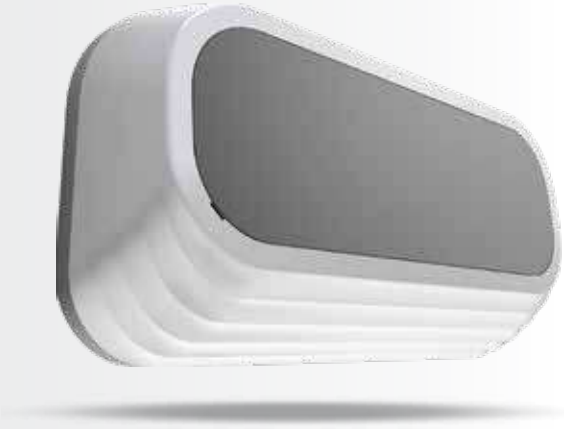

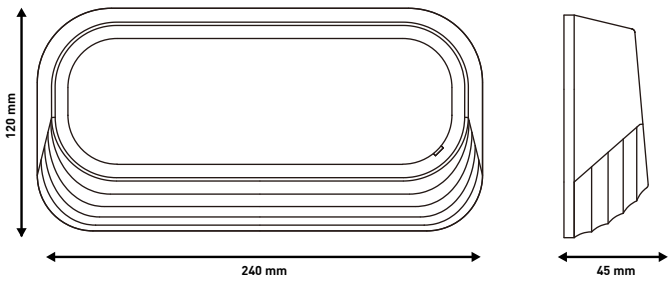


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20209	5207227062780	12W	180mA	3000K	**240x120x45mm**	0.660Kg	DARK GREY	1/12	1




- APLIQUE DE PARED LED SUPERFICIE
- MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

E.145-20204

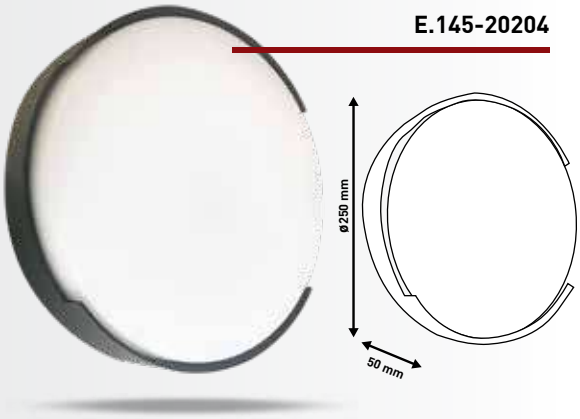

E.145-20205

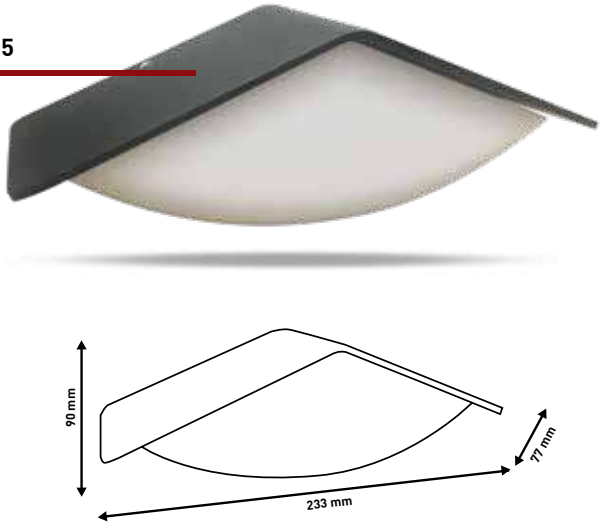

PRO | VOLT 220-240V 50/60Hz | ENERGY CLASS F | BEAM ANGLE 120° | IP54 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C



Color Box PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20204	5207227062902	16W	140mA	3000K	ø250x50mm	1.250Kg	BLACK	1/10	1
E.145-20205	5207227062919	7W	70mA	3000K	233x77x90mm	0.625Kg	BLACK	1/20	1



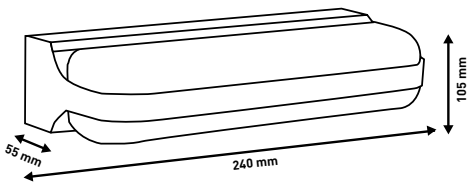

PRO | VOLT 220-240V 50/60Hz | ENERGY CLASS F | BEAM ANGLE 102° | IP65 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 3030 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK08 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C


Color Box PACKING

Disponible en:

Available in: **3000**K


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20206	5207227062728	13W	300mA	3000K	240x55x105mm	0.650Kg	DARK GREY	1/12	1

- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**


E.145-20202





E.145-20203





PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 158° | IP65 | 2 YEARS GUARANTEE

LUMENS 80lm/w | ON-OFF 25.000 | LIFETIME 20.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +45°C -25°C


Color Box PACKING

Disponible en:




Available in: **3000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20202	5207227062544	12W	100mA	3000K	ø169x100mm	0.530Kg	BLACK	1/20	1
E.145-20203	5207227062568	12W	100mA	3000K	160x160x100mm	0.600Kg	BLACK	1/20	1

E.145-20200

WITH COVER
CON CUBIERTA






E.145-20201

WITH COVER
CON CUBIERTA





PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 128° | IP65 | 2 YEARS GUARANTEE

LUMENS 75lm/w | ON-OFF 25.000 | LIFETIME 20.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +45°C -25°C


Color Box PACKING

Disponible en:



Available in: **3000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20200	5207227062506	12W	100mA	3000K	ø169x100mm	0.600Kg	BLACK	1/20	1
E.145-20201	5207227062520	12W	100mA	3000K	160x160x100mm	0.710Kg	BLACK	1/20	1



- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 120° | IP54 | 2 YEARS GUARANTEE


LUMENS 70lm/w | ON-OFF 25.000 | LIFETIME 35.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK07 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C


Color Box
PACKING

Disponible en:


Available in: **3000**K



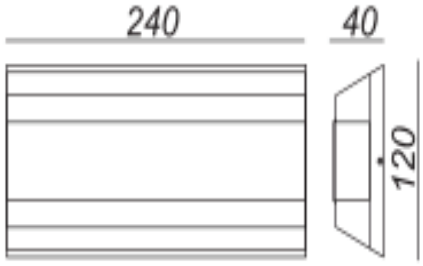

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20220	5207227063398	13W	113mA	3000K	**240x120x40mm**	1.020Kg	BLACK	1/18	1



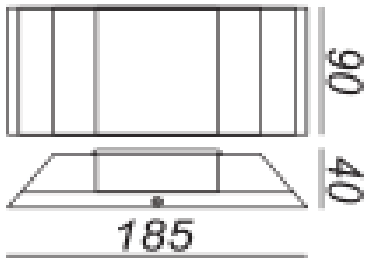

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20221	5207227063411	5W	50mA	3000K	**185x90x40mm**	0.580Kg	BLACK	1/24	1

- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 120° | IP54 | 2 YEARS GUARANTEE

LUMENS	ON-OFF	LIFETIME	LED TYPE	PF	CRI	START TIME	IK07	FLICKER FREE	CLASS I	GROUNDING	OPERATING TEMPERATURE
70lm/w	25.000	35.000 hr	SMD 2835	>0.50	>80	0.5 Sec					+45°C -25°C

Color Box PACKING


Disponible en:
Available in: **3000**K





CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20218	5207227063350	10W	70mA	3000K	**ø150x50mm**	0.580Kg	BLACK	1/18	1



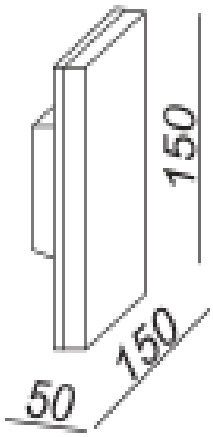


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20219	5207227063374	10W	70mA	3000K	**150x150x50mm**	0.700Kg	BLACK	1/18	1



- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**



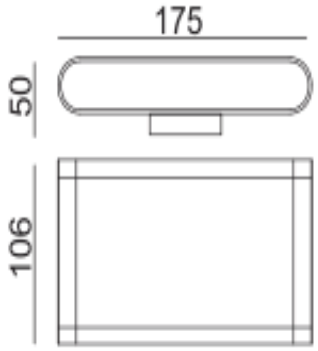

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 120° | IP54 | 2 YEARS GUARANTEE

LUMENS 70lm/w | ON-OFF 25.000 | LIFETIME 35.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK07 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C



Color Box
PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20217	5207227063336	12W	98mA	3000K	175x106x50mm	0.650Kg	BLACK	1/12	1



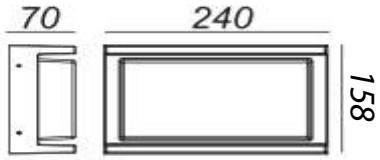

PRO | VOLT 220-240V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 120° | IP54 | 2 YEARS GUARANTEE

LUMENS 65lm/w | ON-OFF 25.000 | LIFETIME 35.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C


Color Box
PACKING

Disponible en:


Available in: **3000**K


CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20216	5207227063312	9W	70mA	3000K	240x158x70mm	1.050Kg	BLACK	1/12	1

- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**

CON BASE GIRATORIA
WITH ROTATING BASE

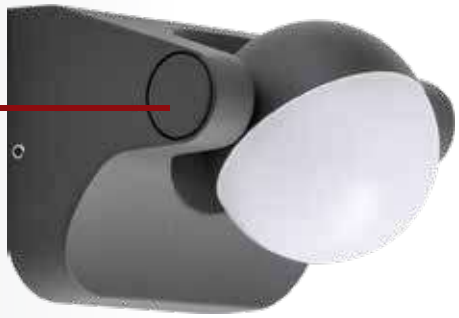

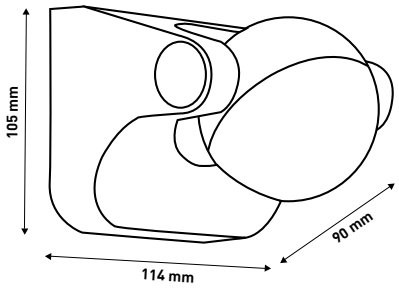

PRO | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 163° | IP54 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK08 | FLICKER FREE | CLASS I | GROUNDING | OPERATING TEMPERATURE +45°C -25°C


Color Box PACKING

Disponible en:

Available in: **3000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20207	5207227062742	8W	120mA	3000K	**114x90x105mm**	0.450Kg	DARK GREY	1/8	1



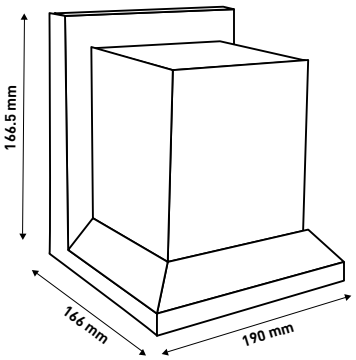

VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 12W | GROUNDING | OPERATING TEMPERATURE +45°C -25°C | IP54 | 2 YEARS GUARANTEE

Color Box PACKING


CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20600	5207227062834	**E27**	**190x166.5x166mm**	1.200Kg	DARK GREY	1/4	1



- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED FIXTURES

MATERIAL DE PRODUCCION: **ACERO INOXIDABLE & CRISTAL**
PRODUCTION MATERIAL: **STAINLESS STEEL & GLASS**



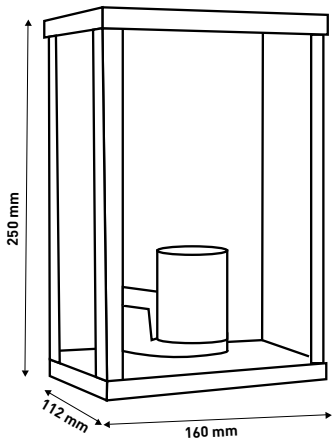



White Box
with Sticker
PACKING

VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 10W | GROUNDING | OPERATING TEMPERATURE +45°C -25°C | IP44 | 3 YEARS GUARANTEE

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.154-55024	5207227014482	**E27**	**160x112x250mm**	1.520Kg	BLACK	1/6	1




- APLIQUE DE PARED SUPERFICIE
- WALL MOUNTED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**





White Box
with Sticker
PACKING



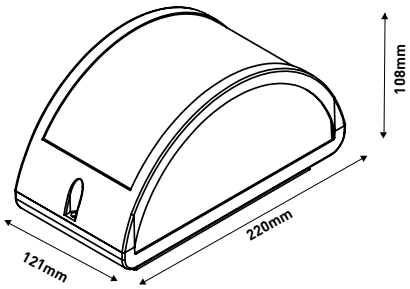

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20210	5207227062650	**E27**	**220x108x121mm**	0.550Kg	BLANCO / WHITE	1/10	1
E.145-20211	5207227062667	**E27**	**220x108x121mm**	0.550Kg	NEGRO / BLACK	1/10	1
E.145-20212	5207227062674	**E27**	**220x108x121mm**	0.550Kg	GRIS / GREY	1/10	1

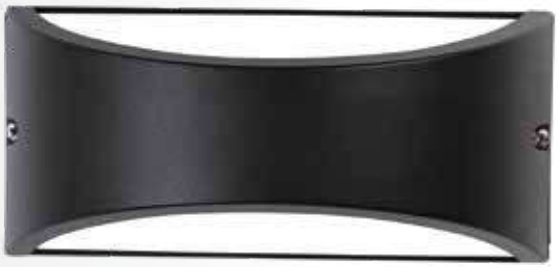

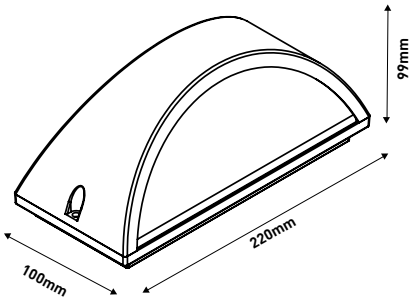

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20213	5207227062681	**E27**	**220x100x99mm**	0.470Kg	BLANCO / WHITE	1/10	1
E.145-20214	5207227062698	**E27**	**220x100x99mm**	0.470Kg	NEGRO / BLACK	1/10	1
E.145-20215	5207227062704	**E27**	**220x100x99mm**	0.470Kg	GRIS / GREY	1/10	1





• APLIQUE DE PARED SUPERFICIE
• WALL MOUNTED FIXTURES

MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**




Color Box
PACKING



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20230	5207227150456	E27	220x100x99mm	0.450Kg	BLANCO / WHITE	1/10	1
E.145-20231	5207227150463	E27	220x100x99mm	0.450Kg	NEGRO / BLACK	1/10	1
E.145-20232	5207227150470	E27	220x100x99mm	0.450Kg	GRIS / GREY	1/10	1



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20233	5207227150487	E27	220x100x99mm	0.650Kg	BLANCO / WHITE	1/10	1
E.145-20234	5207227150494	E27	220x100x99mm	0.650Kg	NEGRO / BLACK	1/10	1
E.145-20235	5207227150500	E27	220x100x99mm	0.650Kg	GRIS / GREY	1/10	1



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20236	5207227150517	E27	220x100x85mm	0.500Kg	BLANCO / WHITE	1/10	1
E.145-20237	5207227150524	E27	220x100x85mm	0.500Kg	NEGRO / BLACK	1/10	1
E.145-20238	5207227150531	E27	220x100x85mm	0.500Kg	GRIS / GREY	1/10	1

- APLIQUE DE PARED "RHODES"
- WALL MOUNTED FIXTURES "RHODES"

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



White Box with Sticker PACKING

PRO | VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 15W | GROUNDING | OPERATING TEMPERATURE +45°C -25°C | IP54 | 2 YEARS GUARANTEE









CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
TZ.V4100700	5415053162110	**E27**	**260x80x105mm**	1.050Kg	GRIS PLATA / SILVER	1/1	1
TZ.V4100701	5415053167078	**E27**	**260x80x105mm**	1.050Kg	BLANCO / WHITE	1/1	1
TZ.V4100702	5415053167085	**E27**	**260x80x105mm**	1.050Kg	MARRON / BROWN	1/1	1




2 in 1



- SIENOS



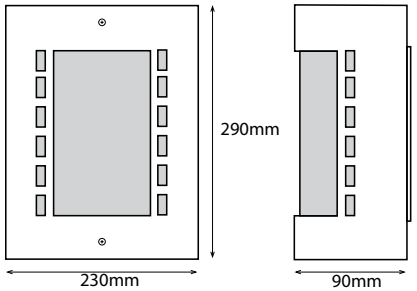

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
5041-IN	8434067116282	**E27**	**290x230x90mm**	0.600Kg	INOX / INOX	1/1	1



- APLIQUE DE PARED LED "LITE"
- WALL MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**




Color Box
PACKING






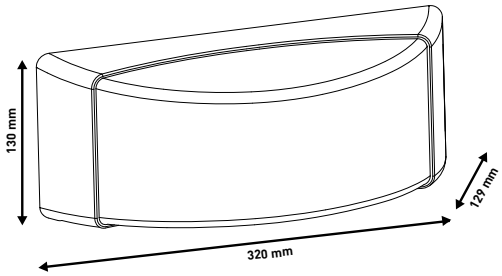

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52025	5207227015441	12W	3000K	**320x130x129mm**	0.680Kg	BLANCO / WHITE	1/12	1

• SLITE




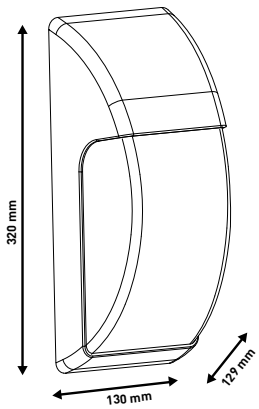

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52034	5207227015564	12W	3000K	**320x130x129mm**	0.717Kg	BLANCO / WHITE	1/12	1
E.145-52036	5207227015595	12W	3000K	**320x130x129mm**	0.717Kg	GRIS / GREY	1/12	1


- APLIQUE DE PARED LED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **PP & PLASTICO**
PRODUCTION MATERIAL: **PP & PLASTIC**

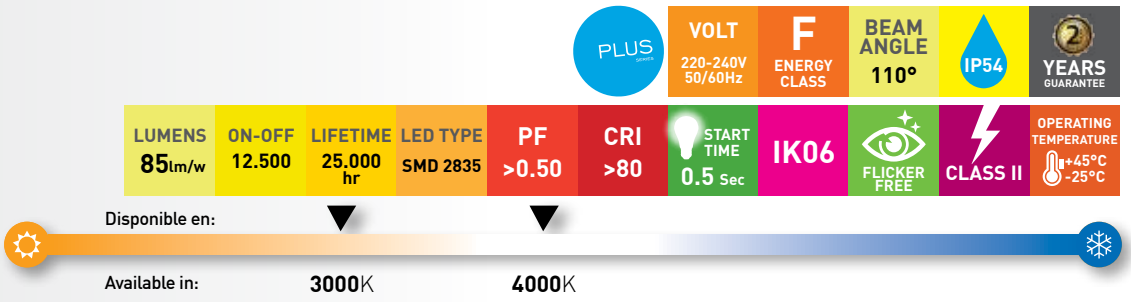








CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20010	5207227063473	8W	4000K	**160x90x51mm**	0.141Kg	BLANCO / WHITE	1/32	1
E.145-20011	5207227063497	8W	3000K	**160x90x51mm**	0.141Kg	BLANCO / WHITE	1/32	1





CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20012	5207227063510	12W	4000K	**205x105x54mm**	0.162Kg	BLANCO / WHITE	1/32	1
E.145-20013	5207227063534	12W	3000K	**205x105x54mm**	0.162Kg	BLANCO / WHITE	1/32	1
E.145-20022	5207227150920	12W	4000K	**205x105x54mm**	0.162Kg	NEGRO / BLACK	1/32	1





CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20024	5207227150944	18W	4000K	**260x135x58mm**	0.335Kg	BLANCO / WHITE	1/24	1
E.145-20025	5207227150968	18W	3000K	**260x135x58mm**	0.335Kg	BLANCO / WHITE	1/24	1
E.145-20026	5207227150982	18W	4000K	**260x135x58mm**	0.355Kg	NEGRO / BLACK	1/24	1



• APLIQUE DE PARED LED SUPERFICIE
• WALL MOUNTED LED FIXTURES


MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**




Color Box
PACKING









CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20014	5207227063558	12W	4000K	**ø170x50mm**	0.189Kg	BLANCO / WHITE	1/20	1
E.145-20015	5207227063572	12W	3000K	**ø170x50mm**	0.189Kg	BLANCO / WHITE	1/20	1





CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20016	5207227063596	18W	4000K	**ø200x55mm**	0.248Kg	BLANCO / WHITE	1/20	1
E.145-20017	5207227063619	18W	3000K	**ø200x55mm**	0.248Kg	BLANCO / WHITE	1/20	1
E.145-20030	5207227150784	18W	4000K	**ø200x55mm**	0.248Kg	NEGRO / BLACK	1/20	1
E.145-20031	5207227150807	18W	3000K	**ø200x55mm**	0.248Kg	NEGRO / BLACK	1/20	1





CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20018	5207227063633	11W	4000K	**190x113x42mm**	0.266Kg	BLANCO / WHITE	1/24	1
E.145-20019	5207227063657	11W	3000K	**190x113x42mm**	0.266Kg	BLANCO / WHITE	1/24	1

- APLIQUE DE PARED LED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **PP & PLASTICO**
PRODUCTION MATERIAL: **PP & PLASTIC**

MOVEMENT SENSOR

CON DETECTOR DE MOVIMIENTO
WITH PIR SENSOR

E.145-20090



E.145-20091



PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 110° | IP54 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK03 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +30°C -20°C



Color Box
PACKING

Disponible en:

Available in: **4000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20090	5207227150883	12W	100mA	4000K	**205x105x54mm**	0.232Kg	WHITE	1/32	1
E.145-20091	5207227150906	12W	100mA	4000K	**170x170x50mm**	0.255Kg	WHITE	1/20	1



PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 110° | IP54 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +45°C -20°C



Color Box
PACKING

Disponible en:

Available in: **4000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20032	5207227150814	18W	160mA	4000K	**190x190x55mm**	0.380Kg	WHITE	1/24	1



- APLIQUE DE PARED LED SUPERFICIE
- WALL MOUNTED LED FIXTURES

MATERIAL DE PRODUCCION: **PP & PLASTICO**
PRODUCTION MATERIAL: **PP & PLASTIC**



PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 110° | IP65 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +45°C -20°C


Color Box PACKING

Disponible en:

Available in: **4000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20034	5207227150845	24W	210mA	4000K	**270x270x93mm**	0.605Kg	WHITE	1/16	1



PLUS | VOLT 220-240V 50/60Hz | F ENERGY CLASS | BEAM ANGLE 110° | IP65 | 2 YEARS GUARANTEE

LUMENS 85lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK06 | FLICKER FREE | CLASS II | OPERATING TEMPERATURE +45°C -20°C


Color Box PACKING

Disponible en:

Available in: **4000**K

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20036	5207227150869	30W	260mA	4000K	**320x320x102mm**	0.888Kg	BLACK	1/10	1



Magic Christmas
by EUROLAMP®
CHRISTMAS IS HERE!
Always available at:
Siempre disponible en:
www.aimur.com
¡Descarga el nuevo Catalogo!
Download our new catalogue!



• Apliques de Pared
para uso profesional

• Wall Mounted LED Lights
for professional use



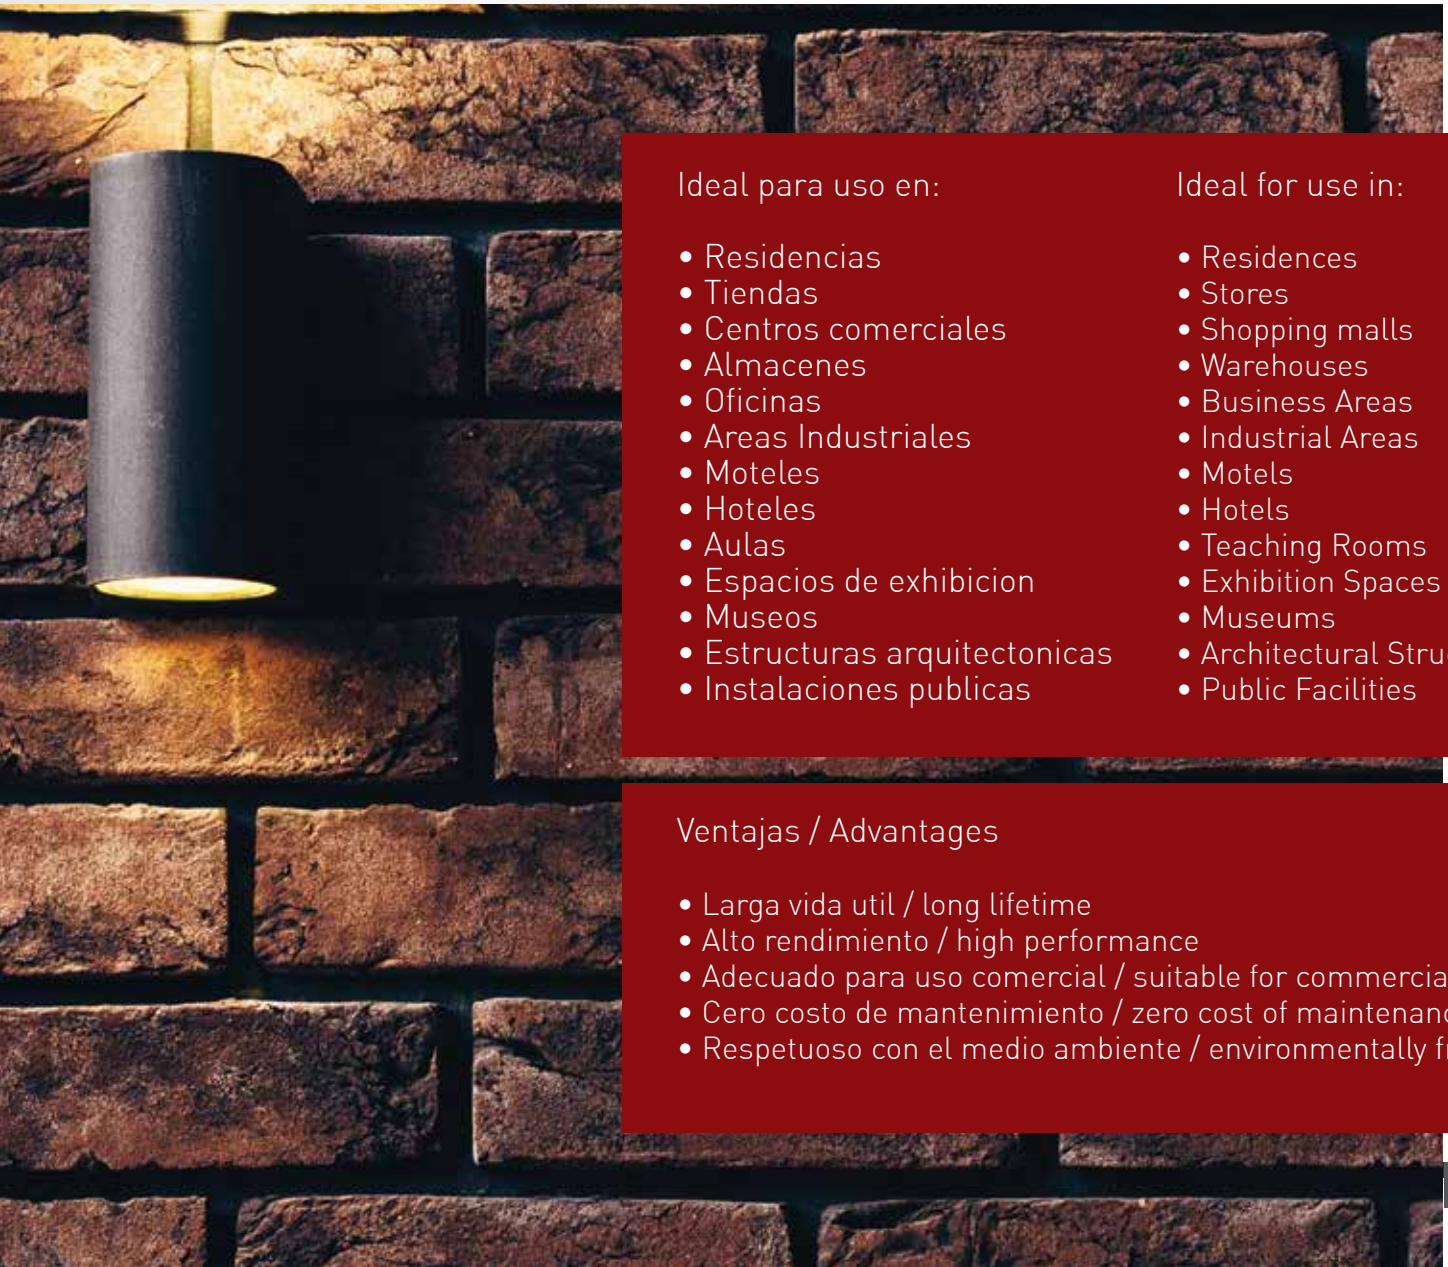

Ideal para uso en:

- Residencias
- Tiendas
- Centros comerciales
- Almacenes
- Oficinas
- Areas Industriales
- Moteles
- Hoteles
- Aulas
- Espacios de exhibicion
- Museos
- Estructuras arquitectonicas
- Instalaciones publicas

Ideal for use in:

- Residences
- Stores
- Shopping malls
- Warehouses
- Business Areas
- Industrial Areas
- Motels
- Hotels
- Teaching Rooms
- Exhibition Spaces
- Museums
- Architectural Structures
- Public Facilities


Ventajas / Advantages

- Larga vida util / long lifetime
- Alto rendimiento / high performance
- Adecuado para uso comercial / suitable for commercial use
- Cero costo de mantenimiento / zero cost of maintenance
- Respetuoso con el medio ambiente / environmentally friendly

- APLIQUE DE PARED SUPERFICIE
- WALL LED LIGHTS

MATERIAL DE PRODUCCION: **PC & PP**
PRODUCTION MATERIAL: **PC & PP**



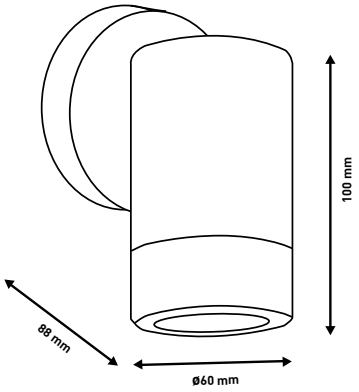


VOLT 220-240V 50/60Hz | BASE GU10 | MAX WATT LED 5W | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP65 | 2 YEARS GUARANTEE


Color Box PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82050	5207227116346	**GU10**	ø60x88x100mm	0.270Kg	BLANCO / WHITE	1/20	1
E.145-82051	5207227116353	**GU10**	ø60x88x100mm	0.270Kg	NEGRO / BLACK	1/20	1
E.145-82052	5207227116360	**GU10**	ø60x88x100mm	0.270Kg	GRIS / GREY	1/20	1



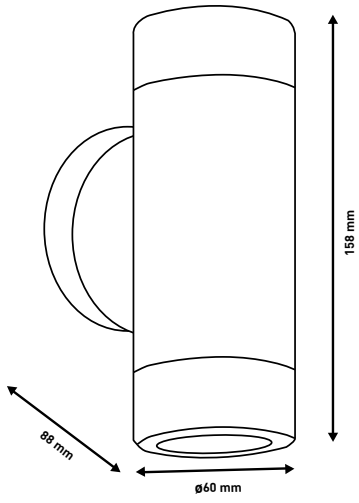

x2

VOLT 220-240V 50/60Hz | BASE GU10 | MAX WATT LED 5W | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP65 | 2 YEARS GUARANTEE



Color Box PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82054	5207227116315	**GU10**	ø60x88x158mm	0.330Kg	BLANCO / WHITE	1/20	1
E.145-82055	5207227116322	**GU10**	ø60x88x158mm	0.330Kg	NEGRO / BLACK	1/20	1
E.145-82056	5207227116339	**GU10**	ø60x88x158mm	0.330Kg	GRIS / GREY	1/20	1



- APLIQUE DE PARED "DOVAR"
- WALL LED LIGHTS "DOVAR"

MATERIAL DE PRODUCCION: **ACERO INOXIDABLE**
PRODUCTION MATERIAL: **STAINLESS STEEL**

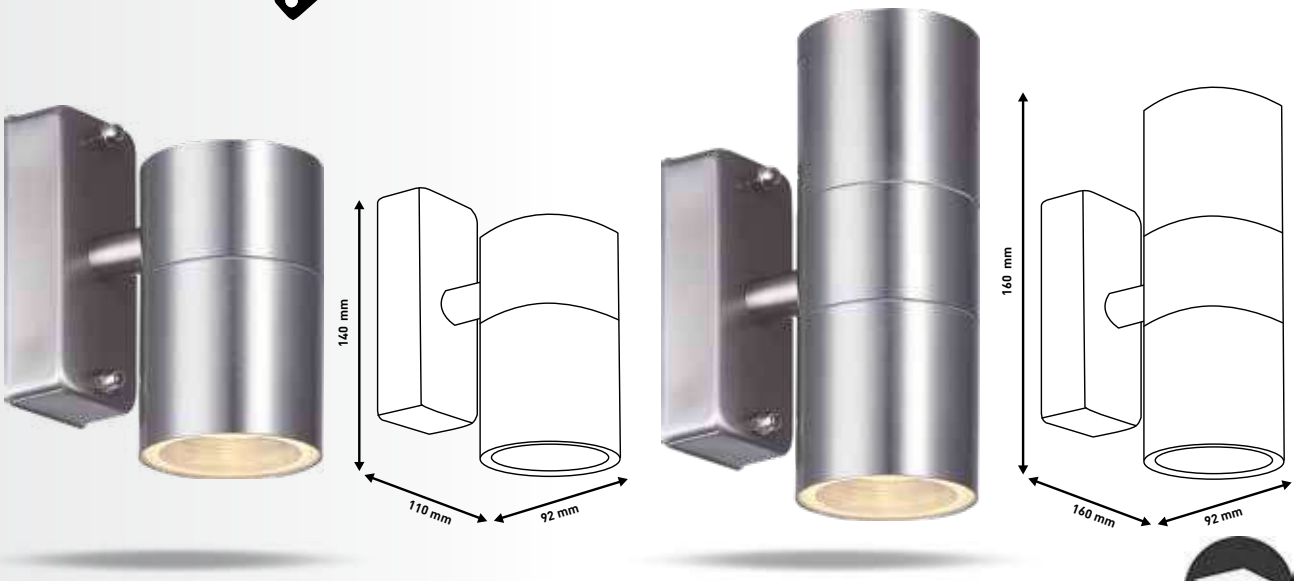



Color Box
PACKING

VOLT 220-240V 50/60Hz | BASE GU10 | MAX WATT LED 6W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP44 | 2 YEARS GUARANTEE

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-82020	5206139044709	**GU10**	**92x110x140mm**	0.380Kg	INOX	1/20	1
E.147-82021	5206139044723	**GU10**	**92x160x160mm**	0.580Kg	INOX	1/20	1



- APLIQUE DE PARED "FOSTOS"
- WALL LED LIGHTS "FOSTOS"

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**


VOLT 220-240V 50/60Hz | BASE GU10 | MAX WATT LED 6W | IK06 | OPERATING TEMPERATURE +40°C -20°C | IP65 | 3 YEARS GUARANTEE



White Box with Sticker PACKING








CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82010	5207227015687	GU10	ø76x99x148mm	0.283Kg	BLANCO / WHITE	1/20	1
E.145-82011	5207227015717	GU10	ø76x99x148mm	0.283Kg	NEGRO / BLACK	1/20	1
E.145-82012	5207227015748	GU10	ø76x99x148mm	0.283Kg	GRIS / GREY	1/20	1
E.145-82013	5207227015779	GU10	ø76x99x148mm	0.283Kg	ANTIQUE BRONZE	1/20	1

★BEST SELLER





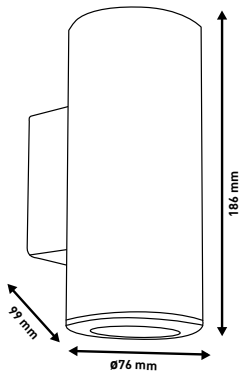


CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82014	5207227015809	GU10	ø76x99x186mm	0.362Kg	BLANCO / WHITE	1/20	1
E.145-82015	5207227015830	GU10	ø76x99x186mm	0.362Kg	NEGRO / BLACK	1/20	1
E.145-82016	5207227015861	GU10	ø76x99x186mm	0.362Kg	GRIS / GREY	1/20	1
E.145-82017	5207227015892	GU10	ø76x99x186mm	0.362Kg	ANTIQUE BRONZE	1/20	1



- APLIQUE DE PARED "FOSTOS"
- WALL LED LIGHTS "FOSTOS"

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**


White Box with Sticker PACKING

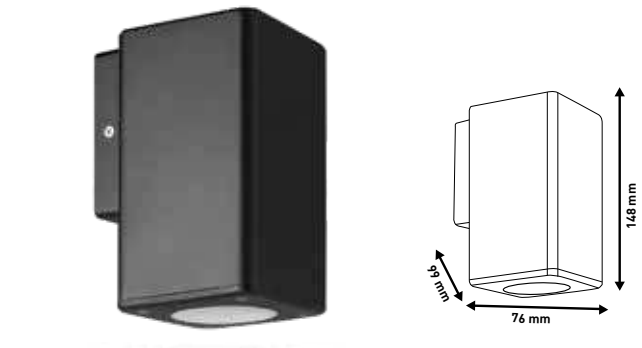

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82000	5207227015144	GU10	99x76x148mm	0.310Kg	BLANCO / WHITE	1/20	1
E.145-82001	5207227015175	GU10	99x76x148mm	0.310Kg	NEGRO / BLACK	1/20	1
E.145-82002	5207227015205	GU10	99x76x148mm	0.310Kg	GRIS / GREY	1/20	1
E.145-82003	5207227015236	GU10	99x76x148mm	0.310Kg	GRIS OSC / DARK GREY	1/20	1
E.145-82004	5207227015267	GU10	99x76x148mm	0.310Kg	ANTIQUE BRONZE	1/20	1

★BEST SELLER



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82005	5207227015298	GU10	99x76x186mm	0.400Kg	BLANCO / WHITE	1/20	1
E.145-82006	5207227015328	GU10	99x76x186mm	0.400Kg	NEGRO / BLACK	1/20	1
E.145-82007	5207227015359	GU10	99x76x186mm	0.400Kg	GRIS / GREY	1/20	1
E.145-82008	5207227015380	GU10	99x76x186mm	0.400Kg	GRIS OSC / DARK GREY	1/20	1
E.145-82009	5207227015410	GU10	99x76x186mm	0.400Kg	ANTIQUE BRONZE	1/20	1


- APLIQUE DE PARED "DOPPELT"
- WALL LED LIGHTS "DOPPELT"

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**

VOLT 220-240V 50/60Hz | BASE GU10 | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP54 | 2 YEARS GUARANTEE



Color Box
PACKING



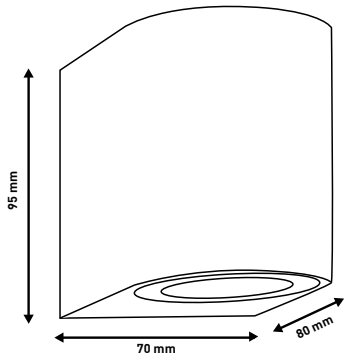

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82060	5207227116377	**GU10**	**70x80x95mm**	0.189Kg	BLANCO / WHITE	1/30	1
E.145-82061	5207227116384	**GU10**	**70x80x95mm**	0.189Kg	NEGRO / BLACK	1/30	1
E.145-82063	5207227116391	**GU10**	**70x80x95mm**	0.189Kg	GRIS OSC / DARK GREY	1/30	1



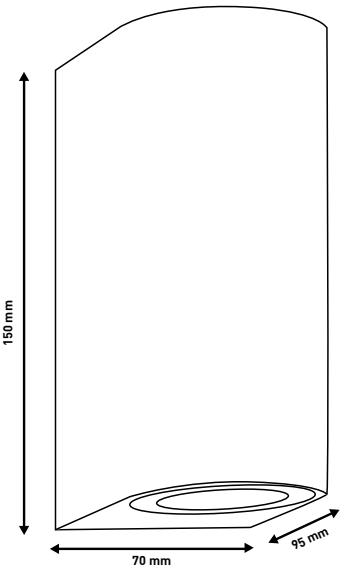

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82064	5207227116407	**GU10**	**70x150x95mm**	0.301Kg	BLANCO / WHITE	1/20	1
E.145-82065	5207227116414	**GU10**	**70x150x95mm**	0.301Kg	NEGRO / BLACK	1/20	1
E.145-82067	5207227116421	**GU10**	**70x150x95mm**	0.301Kg	GRIS OSC / DARK GREY	1/20	1




- APLIQUE DE PARED "DOPPELT"
- WALL LED LIGHTS "DOPPELT"

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**

VOLT 220-240V 50/60Hz | BASE GU10 | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP54 | 2 YEARS GUARANTEE



Color Box PACKING



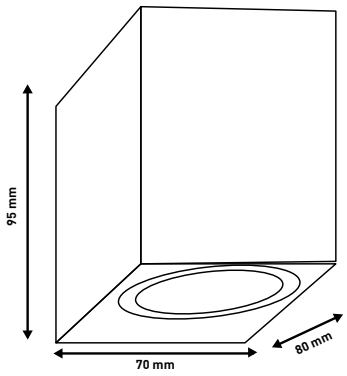

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82070	5207227116438	GU10	70x80x95mm	0.210Kg	BLANCO / WHITE	1/30	1
E.145-82071	5207227116445	GU10	70x80x95mm	0.210Kg	NEGRO / BLACK	1/30	1
E.145-82073	5207227116452	GU10	70x80x95mm	0.210Kg	GRIS OSC / DARK GREY	1/30	1



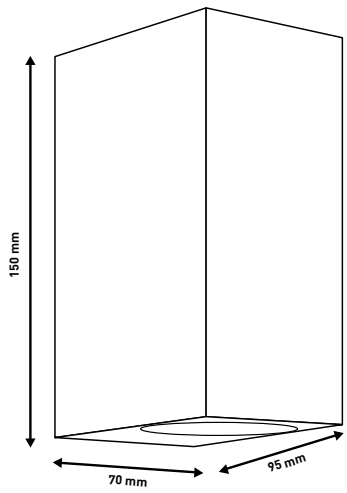


CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82074	5207227116469	GU10	70x150x95mm	0.320Kg	BLANCO / WHITE	1/20	1
E.145-82075	5207227116476	GU10	70x150x95mm	0.320Kg	NEGRO / BLACK	1/20	1
E.145-82077	5207227116483	GU10	70x150x95mm	0.320Kg	GRIS OSC / DARK GREY	1/20	1

- LUMINARIA SUPERFICIE LED DE PISCINA
- SWIMMING POOL LED LIGHTS

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**



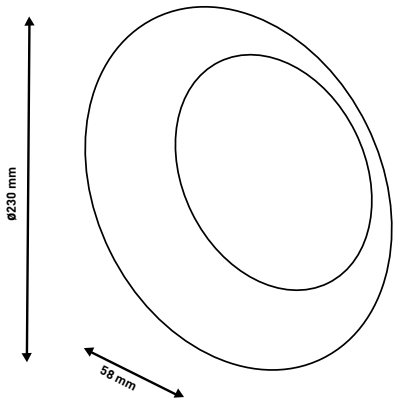

PLUS | VOLT 12V | F ENERGY CLASS | AMPERAGE 1.875A | NOT DIMMABLE | BEAM ANGLE 90° | IP68 | 2 YEARS GUARANTEE

LUMENS 100*lm/w | ON-OFF 15.000 | LIFETIME 30.000 hr | LED TYPE SMD 2835 | PF >0.90 | CRI >80 | START TIME 1 Sec | IK05 | OPERATING TEMPERATURE +50°C -30°C


Color Box
PACKING

Disponible en:
Available in: 3000K 6000K

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-55900*	5206139047595	18W	6500K	ø230x58mm	0.690Kg	WHITE	1/10	1
E.145-55901	5206139047618	18W	BLUE	ø230x58mm	0.690Kg	WHITE	1/10	1
E.145-55904*	5207227059872	18W	3000K	ø230x58mm	0.690Kg	WHITE	1/10	1
E.145-55902	5206139047632	18W	RGB	ø230x58mm	0.690Kg	WHITE	1/10	1

- CONTROLADOR Y INTERRUPTOR
- CONTROLLER AND SWITCH



PARA PAR 56
FOR PAR 56




Double
Blister
PACKING

CODE	BARCODE	WATT	VOLT	IP	OPERATING TEMP.	PACKING	MOQ
E.147-84575	5206139042491	120W	220-240V	IP20	-30oC ~ +45oC	1/50	1



- BASE EMPOTRABLE ILUMINACION DE PISCINA
- FIXTURE FOR VINYL POOL

MATERIAL DE PRODUCCION: **PLASTICO & ABS**
PRODUCTION MATERIAL: **PLASTIC & ABS**







Brown Box with Sticker PACKING

VOLT 12V | BASE GU5.3 | IK07 | GROUNDING | IP68 | 2 YEARS GUARANTEE

CODE	BARCODE	DIMENSIONS	WEIGHT	PACKING	MOQ
E.145-55906	5207227147449	290x145mm	1.524Kg	1/4	1



- Bombilla PAR-56 disponible => Pag. 73
- PAR56 bulbs available=> Page 73



E.147-84570	LAMP LED SMD PAR 56 IP68 20W 6500K 12V AC/DC
E.147-84571	LAMP LED SMD PAR 56 IP68 20W 3000K 12V AC/DC
E.147-84572	LAMP LED SMD PAR 56 IP68 20W BLUE 12V AC/DC
E.147-84573	LAMP LED SMD PAR 56 IP68 20W RGB 12V AC
E.147-84575	CONTROLLER AND SWITCH FOR PAR 56 120W RGB 220-240V

- APLIQUE SOLAR CON SENSOR DE MOVIMIENTO
- SOLAR PANEL LIGHT WITH MOVEMENT SENSOR

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**



RADAR SENSOR | DAY & NIGHT SENSOR | PLUS | BATTERY Lithium 18650 | 4-6h CHARGING TIME | 8-10h DISCHARGE TIME | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 15.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 3 Sec | CLASS III | 1-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C


Color Box
PACKING

CON DETECTOR DIA-NOCHE Y SENSOR RADAR
WITH DAY-NIGHT SENSOR AND RADAR SENSOR
• Distancia de deteccion
Detection Distance: **3-5m**

CODE	BARCODE	WATT	LUMEN	KELVIN	CAPACITY	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20810	5207227118265	0.55W	80 lm	6500K	1200mAh	**98x126x50mm**	0.115Kg	BLACK	1/100	1



RADAR SENSOR | DAY & NIGHT SENSOR

PLUS | BATTERY Lithium 18650 | 4-6h CHARGING TIME | 8-10h DISCHARGE TIME | E ENERGY CLASS | BEAM ANGLE 120° | IP65 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 15.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 3 Sec | CLASS III | 1-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C


Color Box
PACKING


CON DETECTOR DIA-NOCHE Y SENSOR RADAR
WITH DAY-NIGHT SENSOR AND RADAR SENSOR
• Distancia de deteccion
Detection Distance: **3-5m**

CODE	BARCODE	WATT	LUMEN	KELVIN	CAPACITY	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20812	5207227118302	2.50W	160 lm	6500K	2000mAh	**30x180x110mm**	0.248Kg	BLACK	1/50	1



• LUCES CON PANEL SOLAR
• SOLAR PANEL LIGHTS

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**

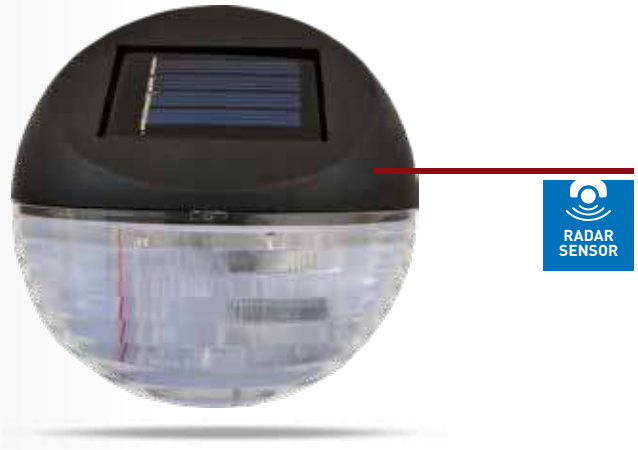

PLUS | BATTERY NI-MH 200mAh | 4-6h CHARGING TIME | 8-10h DISCHARGE TIME | BEAM ANGLE 120° | IP44 | 2 YEARS GUARANTEE

ON-OFF 10.000 | LIFETIME 12.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 3 Sec | CLASS III | 1-3 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C



Color Box
PACKING

• Distancia de deteccion
• Detection Distance
3-5m

CODE	BARCODE	WATT	KELVIN	DIMENSION	WEIGHT	COLOR	PACKING	MOQ
E.145-20814	5207227151774	0.06W	3000K	**112x112x40mm**	0.011Kg	BLACK	1/12	12

• LUMINARIA SOLAR PARA ESCALON
• SOLAR LIGHTING FOR STEP

MATERIAL DE PRODUCCION: **ABS & PVC**
PRODUCTION MATERIAL: **ABS & PVC**



PLUS | BATTERY NI-MH 1.2V | 4-6h CHARGING TIME | 8-10h DISCHARGE TIME | BEAM ANGLE 180° | IP44 | 1 YEAR GUARANTEE

ON-OFF 50.000 | LIFETIME 50.000 hr | LED TYPE SMD 2835 | CRI >80 | START TIME 1 Sec | CLASS III | 1-2 m INSTALLATION HEIGHT | OPERATING TEMPERATURE +45°C -10°C




Color Box
PACKING

• Distancia de deteccion
• Detection Distance
4-6m

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20815	5207227151781	0.20W	3000K	**80x44x45mm**	0.049Kg	BLACK	1/400	10
E.145-20816	5207227151798	0.14W	3000K	**90x54x50mm**	0.060Kg	BLACK	1/24	24

- LUZ DE JARDIN SOLAR
- SOLAR PANEL LIGHT GARDEN

MATERIAL DE PRODUCCION: **ABS**
PRODUCTION MATERIAL: **ABS**




E.145-20817





CON DETECTOR DIA-NOCHE
WITH DAY-NIGHT SENSOR

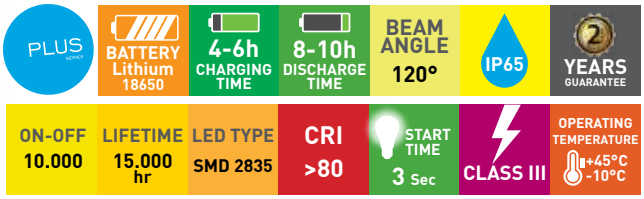



Color Box
PACKING

CODE	BARCODE	WATT	LUMEN	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20817	5207227151804	0.06W	3 lm	4000K	**Ø120x130mm**	0.130Kg	SILVER	1/4/24	1


MATERIAL DE PRODUCCION: **PP**
PRODUCTION MATERIAL: **PP**



E.145-20850



E.145-20851

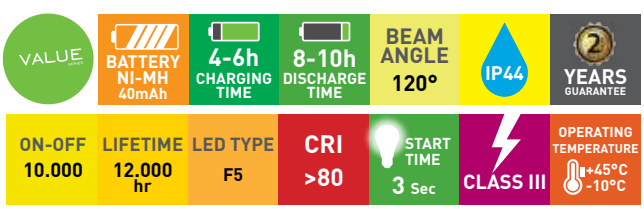



Display Box
PACKING

CODE	BARCODE	WATT	LUMEN	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20850	5207227151736	0.06W	1 lm	4000K	**100x100x335mm**	0.096Kg	BLACK	1/16	16
E.145-20851	5207227151743	0.06W	1 lm	RGB	**80x80x335mm**	0.096Kg	SILVER	1/16	16



- LUZ DE JARDIN SOLAR
- SOLAR PANEL LIGHT GARDEN

MATERIAL DE PRODUCCION: **PP**
PRODUCTION MATERIAL: **PP**



DAY & NIGHT SENSOR

CON DETECTOR DIA-NOCHE
WITH DAY-NIGHT SENSOR


PLUS | BATTERY NI-MH 1.2 V | 6-8h CHARGING TIME | 6-8h DISCHARGE TIME | BEAM ANGLE 90° | IP44 | 2 YEARS GUARANTEE

ON-OFF 3000-5000 | LIFETIME 1.440 hr | LED TYPE SMD 2835 | CRI >50 | START TIME 1 Sec | CLASS III | OPERATING TEMPERATURE +45°C -10°C


Color Box PACKING

CODE	BARCODE	WATT	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20852	5207227151750	0.1W	4000K	55x55x325mm	0.095Kg	BLACK	1/20	20

- GUIRNALDA EXTERIOR EXTENSIBLE
- OUTDOOR STRING LIGHT EXTENDABLE
- IP44 • E27

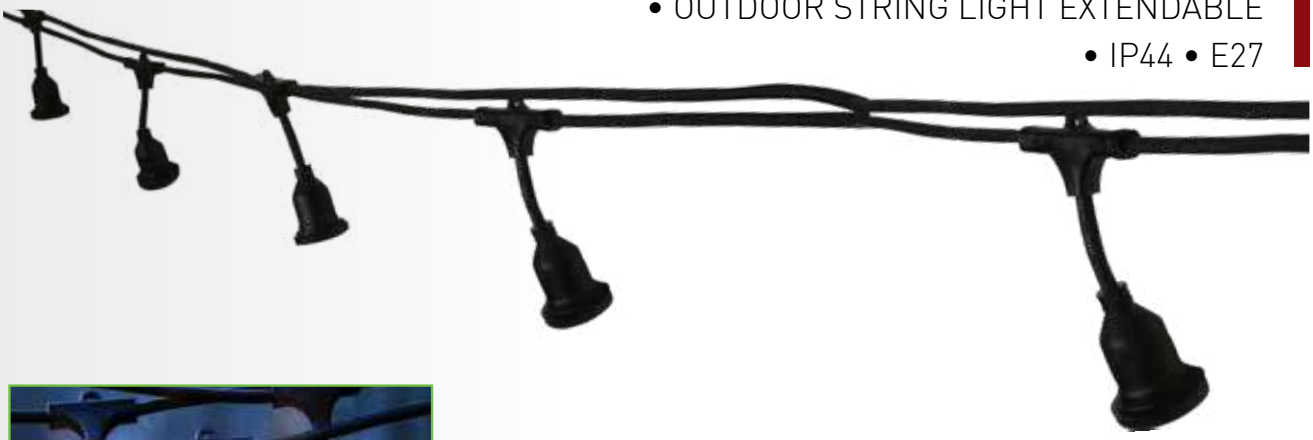



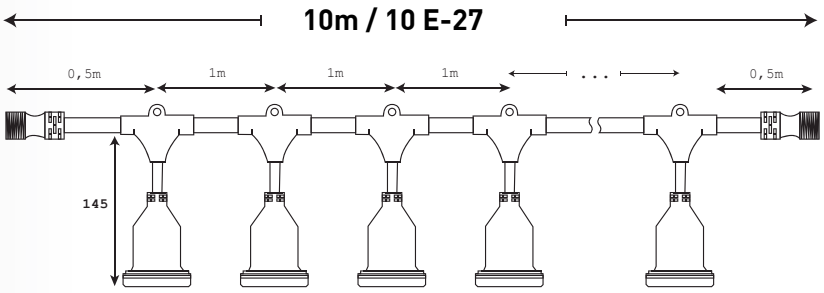

VOLT 220-240 V 50/60Hz | AMPERAGE 16 A | CABLE CROSS SECTION 2x1mm | GROUNDING | OPERATING TEMPERATURE +60°C -20°C | IP44 | 2 YEARS GUARANTEE

COLOR Box PACKING

CODE	BARCODE	WATT	TOTAL LENGTH	BASEHOLD	WEIGHT	PACKING	MOQ
E.147-47090	5207227026850	max. 10W LED	10+1 m	10 x E27	0.245 kg	1/4	1

- APLIQUE OVALADO REJILLA
- GUTTER LIGHTS

MATERIAL DE PRODUCCION: **PLASTICO**
PRODUCTION MATERIAL: **PLASTIC**




Color Box
PACKING



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55200	5206139306005	**E27**	**175x95x120mm**	0.480Kg	BLANCO / WHITE	1/30	4

MATERIAL DE PRODUCCION: **PLASTICO & CRISTAL**
PRODUCTION MATERIAL: **PLASTIC & GLASS**





CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55201	5206139306012	**E27**	**205x100x118mm**	0.500Kg	BLANCO / WHITE	1/20	4
E.147-55202	5206139306029	**E27**	**205x100x118mm**	0.500Kg	NEGRO / BLACK	1/20	4

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55007	5206139304070	**E27**	**210x105x85mm**	0.585Kg	BLANCO / WHITE	1/20	4
E.147-55008	5206139304087	**E27**	**210x105x85mm**	0.585Kg	NEGRO / BLACK	1/20	4
E.147-55079	5206139304797	**E27**	**210x105x85mm**	0.585Kg	GRIS / GREY	1/20	4




- PLAFON DE TECHO
- CEILING LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**




Color Box
PACKING

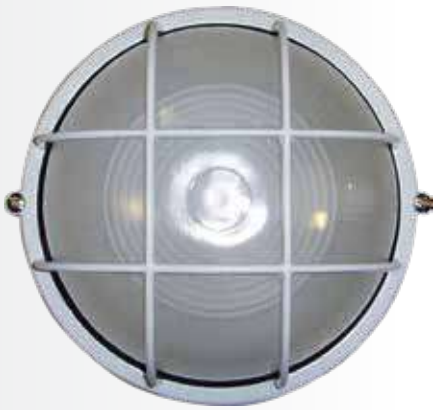



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55005	5206139304056	**E27**	**ø180x90mm**	0.630Kg	BLANCO / WHITE	1/20	1
E.147-55006	5206139304063	**E27**	**ø180x90mm**	0.630Kg	NEGRO / BLACK	1/20	1

E.147-99434
CRISTAL RECAMBIO
SPARE GLASS





CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55070	5206139304704	**E27**	**270x130x100mm**	1.040Kg	BLACK	1/10	1
E.147-55071	5206139304711	**E27**	**270x130x100mm**	1.040Kg	BLANCO / WHITE	1/10	1
E.147-55072	5206139304728	**E27**	**270x130x100mm**	1.040Kg	GRIS / GREY	1/10	1

- APLIQUES DE PARED OVALUS
- WALL MOUNTED FIXTURES OVALUS

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**

BASE E27 | MAX WATT LED 10W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP44 | 2 YEARS GUARANTEE


Color Box
PACKING



E.147-99433
CRISTAL RECAMBIO
SPARE GLASS



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55060	5206139304605	E27	215x150x100mm	0.610Kg	BLANCO / WHITE	1/20	1
E.147-55061	5206139304612	E27	215x150x100mm	0.610Kg	NEGRO / BLACK	1/20	1
E.147-55062	5206139304629	E27	215x150x100mm	0.610Kg	GRIS / GREY	1/20	1



E.147-99433
CRISTAL RECAMBIO
SPARE GLASS



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55063	5206139304636	E27	215x150x100mm	0.690Kg	BLANCO / WHITE	1/20	1
E.147-55064	5206139304643	E27	215x150x100mm	0.690Kg	NEGRO / BLACK	1/20	1
E.147-55065	5206139304650	E27	215x150x100mm	0.690Kg	GRIS / GREY	1/20	1



E.147-99433
CRISTAL RECAMBIO
SPARE GLASS




CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-55066	5206139304667	E27	215x150x100mm	0.710Kg	BLANCO / WHITE	1/20	1
E.147-55067	5206139304674	E27	215x150x100mm	0.710Kg	NEGRO / BLACK	1/20	1
E.147-55068	5206139304681	E27	215x150x100mm	0.710Kg	GRIS / GREY	1/20	1




- EMPOTRABLE SUELO
- SPOT LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**









Ø120mm CUTTING DIAMETER

BASE GU10 | MAX WATT LED 6W | IK09 | GROUNDING | OPERATING TEMPERATURE +50°C -20°C | IP65 | 3 YEARS GUARANTEE




Color Box PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-68704	5206139327048	GU10	ø110x125mm	0.480Kg	SATIN	1/12	1
E.147-68706	5206139327062	GU10	110x110x125mm	0.500Kg	SATIN	1/12	1


- LUMINARIA SUELO SUPERFICIE 12V
- SURFACE CORRIDOR LED LIGHT 12V

MATERIAL DE PRODUCCION: **ALUMINIO & PC**
PRODUCTION MATERIAL: **ALUMINIUM & PC**









PRO | VOLT 12V | G ENERGY CLASS | AMPERAGE 300mA | BEAM ANGLE 163° | IP54 | 2 YEARS GUARANTEE

LUMENS 25lm/w | ON-OFF 25.000 | LIFETIME 30.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | IK08 | CLASS III | OPERATING TEMPERATURE +40°C -20°C



Color Box PACKING

CODE	BARCODE	WATT	BEAM ANGLE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-52520	5207227116681	3W	3 x 85°	3000K	ø68x24mm	0.180Kg	BLACK	1/50	1
E.145-52521*	5207227116698	3W	4 x 45°	3000K	ø68x24mm	0.180Kg	BLACK	1/50	1

- EMPOTRABLE SUELO LED
- SURFACE CORRIDOR LED LIGHT

MATERIAL DE PRODUCCION: **ACERO INOXIDABLE**
PRODUCTION MATERIAL: **STAINLESS STEEL**

PLUS | VOLT 85-265V 50/60Hz | G ENERGY CLASS | BEAM ANGLE 30° | IP65 | 2 YEARS GUARANTEE

LUMENS 80lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE SMD 2835 | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | OPERATING TEMPERATURE +45°C -25°C


Color Box
PACKING




CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	COLOR	PACKING	MOQ
E.145-52550	5207227151217	3W	550mA	3000K	Ø62x55x84mm	BLACK	1/20	1
E.145-52551	5207227151224	3W	550mA	3000K	Ø62x55x84mm	BLACK	1/20	1
E.145-52552	5207227151231	3W	550mA	3000K	Ø62x55x84mm	BLACK	1/20	1
E.145-52553	5207227151248	3W	550mA	3000K	Ø62x55x94mm	BLACK	1/20	1
E.145-52554	5207227151255	3W	550mA	3000K	Ø62x55x94mm	BLACK	1/20	1





• EMPOTRABLE SUELO "FOREVER LED"
• FLOOR RECESSED "FOREVER LED"

MATERIAL DE PRODUCCION: **ALUMINIO O LATON**
PRODUCTION MATERIAL: **ALUMINIUM OR BRASS**

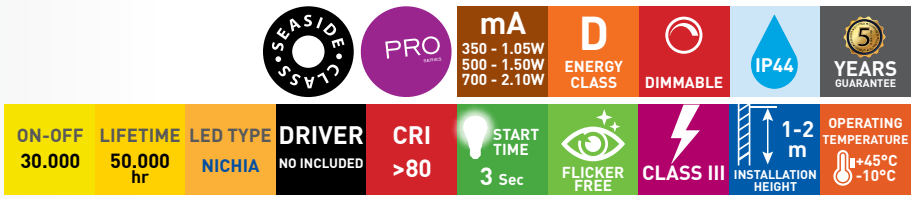


Disponible:


Available in: **3000**K (30)* **4000**K (40)*

















Plastic recesed fixing kit included.
Incluye kit de fijación empotrable de plástico.

CODE	WATT	KELVIN	LUMEN / WATT	WEIGHT	COLOR	MOQ
G1151.AL.__*	1.05-2.10W	3/4*	135 lm/watt	0.280kg	ANODIZED/ANODIZADO	1
G9111.02.__*	1.05-2.10W	3/4*	135 lm/watt	0.040kg	BRASS/LATON	1

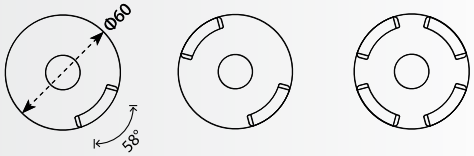






Plastic recesed fixing kit included.
Incluye kit de fijación empotrable de plástico.



CODE	WATT	KELVIN	BEAMS	LUMEN / WATT	WEIGHT	COLOR	MOQ
G1153.AL.__*	1.05-2.10W	3/4*	1	135 lm/watt	0.280kg	ANODIZED/ANODIZADO	1
G1153.BR.__*	1.05-2.10W	3/4*	1	135 lm/watt	0.040kg	BRASS/LATON	1
G1154.AL.__*	1.05-2.10W	3/4*	2	135 lm/watt	0.280kg	ANODIZED/ANODIZADO	1
G1154.BR.__*	1.05-2.10W	3/4*	2	135 lm/watt	0.040kg	BRASS/LATON	1
G1155.AL.__*	1.05-2.10W	3/4*	4	135 lm/watt	0.280kg	ANODIZED/ANODIZADO	1
G1155.BR.__*	1.05-2.10W	3/4*	4	135 lm/watt	0.040kg	BRASS/LATON	1



Option to include non-dimmable Driver in all Forever Led models. G1151, G1153, G1154, G1155 and G1159. By changing the code from the number 5 to 4, this model will incorporate the driver (eg G1153.AL.28.30 => G1143.AL.28.30), this makes the body grow to a length of 119mm connecting directly to the 220-240V network.

Opción de incluir Driver no regulable en todos los modelos Forever Led. G1151, G1153, G1154, G1155 y G1159. Cambiando en el código el número **5** por un **4** este módelo incorporá el driver (p.e. G11**5**3.AL.28.30 => G11**4**3.AL.28.30), esto hace que el cuerpo crezca hasta una longitud de 119mm conectandose directamente a la red 220-240V.




- FOCO JARDIN
- GARDEN SPOT LIGHTS

MATERIAL DE PRODUCCION: **PC & ABS**
PRODUCTION MATERIAL: **PC & ABS**

VOLT 220-240V 50/60Hz | BASE GU10 | MAX WATT LED 5W | IK06 | CLASS II | OPERATING TEMPERATURE +40°C -20°C | IP65 | 3 YEARS GUARANTEE

Color Box PACKING

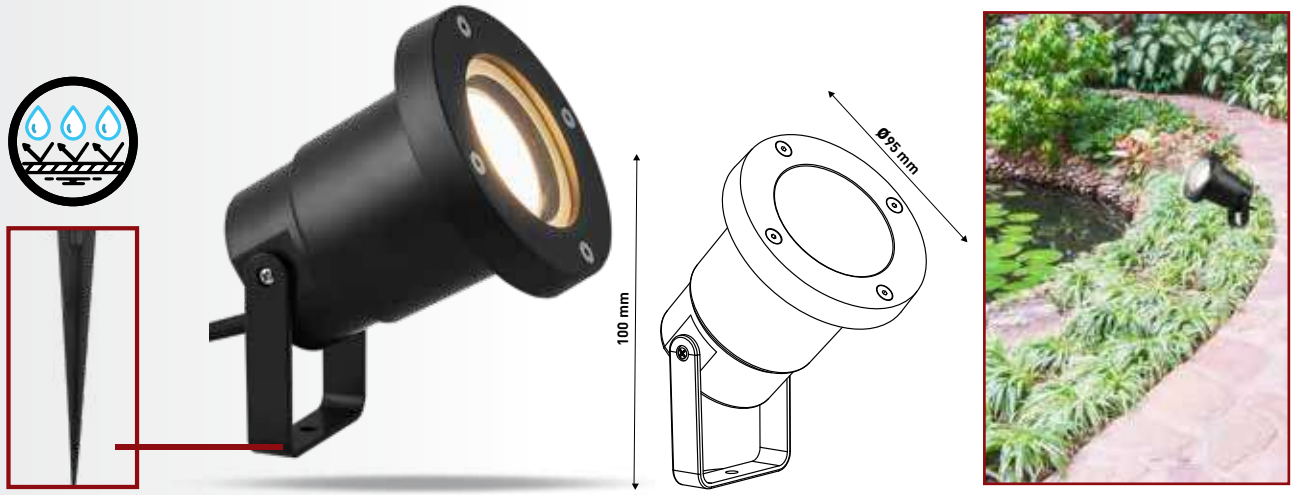

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82023	5207227116490	GU10	ø95x100mm	0.280Kg	BLANCO / WHITE	1/20	1
E.145-82024	5207227116506	GU10	ø95x100mm	0.280Kg	NEGRO / BLACK	1/20	1
E.145-82025	5207227116513	GU10	ø95x100mm	0.280Kg	GRIS / GREY	1/20	1

MATERIAL DE PRODUCCION: **ABS & PLASTICO**
PRODUCTION MATERIAL: **ABS & PLASTIC**



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82020	5207227015922	GU10	ø60x60x322mm	0.170Kg	BLANCO / WHITE	1/20	1
E.145-82021	5207227015953	GU10	ø60x60x322mm	0.170Kg	NEGRO / BLACK	1/20	1
E.145-82022	5207227015984	GU10	ø60x60x322mm	0.170Kg	GRIS / GREY	1/20	1



• FOCO DE JARDIN CON TAPA Y BASE
• GARDEN SPOT LIGHT WITH COVER AND NAIL BASE

MATERIAL DE PRODUCCION: **ABS & CRISTAL**
PRODUCTION MATERIAL: **ABS & GLASS**



Color Box
PACKING





CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82027	5207227150401	**GU10**	**ø86x73mm**	2.790Kg	NEGRO / BLACK	1/20	1

MATERIAL DE PRODUCCION: **ABS & CRISTAL**
PRODUCTION MATERIAL: **ABS & GLASS**





CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-82026	5207227150395	**GU10**	**ø86x235mm**	3.020Kg	NEGRO / BLACK	1/20	1

- FOCOS DE JARDIN
- GARDEN SPOT LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**


MAX WATT LED 6W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP65 | 1 YEAR GUARANTEE


Color Box
PACKING



VOLT
220-240V
50/60Hz

BASE
GU10




CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-68410	5206139324108	GU10	ø100x155mm	0.340Kg	WHITE	1/30	1
E.147-68411	5206139324115	GU10	ø100x155mm	0.340Kg	BLACK	1/30	1
E.147-68412	5206139324122	GU10	ø100x155mm	0.340Kg	GREY	1/30	1



VOLT
12V


BASE
MR16



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-68400	5206139324009	GU5,3 MR16	ø100x155mm	0.340Kg	WHITE	1/30	1
E.147-68401	5206139324016	GU5,3 MR16	ø100x155mm	0.340Kg	BLACK	1/30	1
E.147-68402	5206139324023	GU5,3 MR16	ø100x155mm	0.340Kg	GREY	1/30	1

- ACCESORIO PARA FOCO DE JARDIN
- ACCESSORIES FOR SPOT LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**

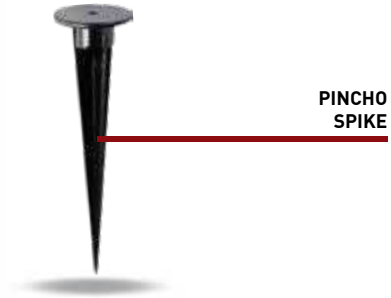


Nylon Bag
PACKING

CODE	BARCODE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-22400	5206139394002	30x30x170mm	0.050Kg	WHITE	1/100	5
E.147-22404	5206139394040	30x30x170mm	0.050Kg	BLACK	1/100	5
E.147-22405	5206139394057	30x30x170mm	0.050Kg	GREY	1/100	5



• APLIQUE Y FOCOS DE JARDIN
• WALL LIGHTS & GARDEN SPOT LIGHTS

MATERIAL DE PRODUCCION: **PP**
PRODUCTION MATERIAL: **PP**

E.147-68902



E.147-68900



E.147-68901



BASE E27 | MAX WATT LED 15W | OPERATING TEMPERATURE +45°C -20°C | IP44 | 1 YEAR GUARANTEE


Color Box
PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-68902	5206139329028	**E27**	**ø70x75x220mm**	0.350Kg	BLACK	1/20	1
E.147-68900	5206139329004	**E27**	**ø70x420mm**	0.600Kg	BLACK	1/30	1
E.147-68901	5206139329011	**E27**	**ø70x200x420mm**	0.766Kg	BLACK	1/20	1

• PINCHO DOBLE ENCHUFE
• SPIKE WITH DOUBLE SOCKET

MATERIAL DE PRODUCCION: **PP**
PRODUCTION MATERIAL: **PP**





VOLT 220-240V 50/60Hz | OPERATING TEMPERATURE +45°C -20°C


White Box
with Sticker
PACKING

CODE	BARCODE	WATT	AMPERAGE	IP	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.147-16900	5206139022776	max 2000W	16A	IP44	**105x105x345mm**	0.350Kg	BLACK	1/20	1

- COLUMNA LED
- COLUMN LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**







PLUS | VOLT 85-265V 50/60Hz | D ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

LUMENS 80lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | OPERATING TEMPERATURE +45°C -25°C



White Box
PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	COLOR	PACKING	MOQ
E.145-20626	5207227151293	7W	260-280mA	3000K	162x57x400mm	NEGRO / BLACK	1/9	1
E.145-20627	5207227151309	12W	260-280mA	3000K	162x57x600mm	NEGRO / BLACK	1/9	1



- COLUMNA LED
- COLUMN LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO**
PRODUCTION MATERIAL: **ALUMINIUM**







PLUS | VOLT 85-265V 50/60Hz | D ENERGY CLASS | IP65 | 2 YEARS GUARANTEE

LUMENS 80lm/w | ON-OFF 15.000 | LIFETIME 25.000 hr | LED TYPE COB | PF >0.50 | CRI >80 | START TIME 0.5 Sec | CLASS I | OPERATING TEMPERATURE +45°C -25°C


White Box
PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	COLOR	PACKING	MOQ
E.145-20628	5207227151316	7W	260-280mA	3000K	162x57x400mm	NEGRO / BLACK	1/9	1
E.145-20629	5207227151323	12W	260-280mA	3000K	162x57x600mm	NEGRO / BLACK	1/9	1

- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 10W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP54 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20621	5207227150593	**E27**	**90x120x220mm**	0.680Kg	NEGRO / BLACK	1/9	1
E.145-20622	5207227150609	**E27**	**90x90x500mm**	1.100Kg	NEGRO / BLACK	1/9	1
E.145-20623	5207227150616	**E27**	**90x90x800mm**	1.700Kg	NEGRO / BLACK	1/9	1

MATERIAL DE PRODUCCION: **ABS & CRISTAL**
PRODUCTION MATERIAL: **ABS & GLASS**



VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 40W | GROUNDING | OPERATING TEMPERATURE +60°C -36°C | IP44 | 2 YEARS GUARANTEE

Color Box PACKING

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20624	5207227150371	**E27**	**91x134x296mm**	9.800Kg	NEGRO / BLACK	1/12	1
E.145-20625	5207227150388	**E27**	**91x160x700mm**	7.200Kg	NEGRO / BLACK	1/6	1




- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS

MATERIAL DE PRODUCCION: **METALICO**
PRODUCTION MATERIAL: **METALLIC**


E.145-20601





E.147-20602



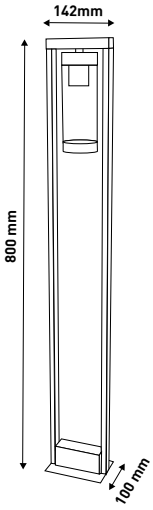



Color Box
PACKING

VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 15W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP44 | 2 YEARS GUARANTEE

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20601	5207227062940	E27	130x76x291mm	0.649Kg	NEGRO / BLACK	1/16	1
E.145-20602	5207227062964	E27	142x100x800mm	1.669Kg	NEGRO / BLACK	1/4	1

MATERIAL DE PRODUCCION: **ALUMINIO & POLICARBONATO**
PRODUCTION MATERIAL:**ALUMINIUM & POLYCARBONATE**


E.145-20632



IP65


E.145-20615





E.145-20615







Color Box
PACKING

VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 12W | GROUNDING | OPERATING TEMPERATURE +65°C -20°C | IP44 | 2 YEARS GUARANTEE

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20615	5207227063275	E27	100x160x230mm	1.050Kg	GRIS OSC/DARK GREY	1/12	1
E.145-20616	5207227063299	E27	100x100x650mm	1.950Kg	GRIS OSC/DARK GREY	1/6	1
E.145-20632	5207227151286	E27	150x50x190mm	0Kg	NEGRO / BLACK	1/2	1

- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS


MATERIAL DE PRODUCCION: **METALICO**
PRODUCTION MATERIAL: **METALLIC**

VOLT 220-240V 50/60Hz | BASE E27 | MAX WATT LED 15W | GROUNDING | OPERATING TEMPERATURE +45°C -20°C | IP44 | 2 YEARS GUARANTEE

Color Box PACKING


E.145-20606





E.145-20607
E.145-20608




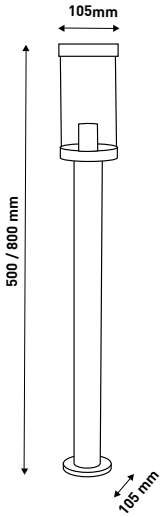

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20606	5207227063046	**E27**	**110x185x290mm**	0.882Kg	NEGRO / BLACK	1/8	1
E.145-20607	5207227063060	**E27**	**105x105x500mm**	0.860Kg	NEGRO / BLACK	1/4	1
E.145-20608	5207227063084	**E27**	**105x105x800mm**	1.080Kg	NEGRO / BLACK	1/4	1


E.145-20603





E.145-20604
E.145-20605



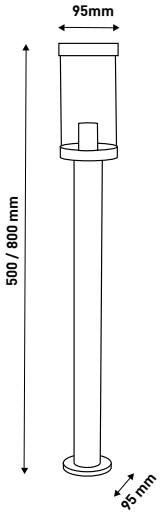

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20603	5207227062988	**E27**	**95x136x240mm**	0.676Kg	NEGRO / BLACK	1/12	1
E.145-20604	5207227063008	**E27**	**95x95x500mm**	0.784Kg	NEGRO / BLACK	1/6	1
E.145-20605	5207227063022	**E27**	**95x95x800mm**	1.000Kg	NEGRO / BLACK	1/4	1



- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS


MATERIAL DE PRODUCCION: **ALUMINIO & PLASTICO**
PRODUCTION MATERIAL: **ALUMINIUM & PLASTIC**




Color Box
PACKING


E.145-20612





E.145-20613
E.145-20614




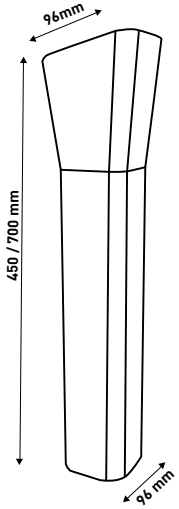

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20612	5207227062872	E27	96x122x250mm	0.500Kg	GRIS OSCURO / DARK GREY	1/8	1
E.145-20613	5207227062889	E27	96x96x450mm	0.800Kg	GRIS OSCURO / DARK GREY	1/4	1
E.145-20614	5207227062896	E27	96x96x700mm	1.200Kg	GRIS OSCURO / DARK GREY	1/4	1


E.145-20609





E.145-20610
E.145-20611



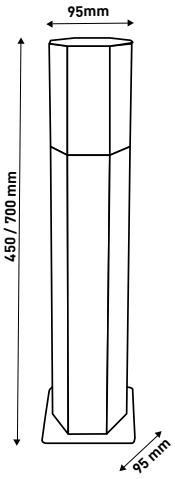

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20609	5207227062841	E27	70x100x250mm	0.450Kg	GRIS OSCURO / DARK GREY	1/10	1
E.145-20610	5207227062858	E27	95x95x450mm	0.680Kg	GRIS OSCURO / DARK GREY	1/4	1
E.145-20611	5207227062865	E27	95x95x700mm	1.100Kg	GRIS OSCURO / DARK GREY	1/4	1

- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS

MATERIAL DE PRODUCCION: **ACERO INOXIDABLE & PLASTICO**
PRODUCTION MATERIAL: **STAINLESS STEEL & PLASTIC**


Color Box
PACKING



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.154-56020	5206139470201	E27	76x76x400mm	0.580Kg	INOX	1/20	1
E.154-56021	5206139470218	E27	131x145x350mm	0.580Kg	INOX	1/12	1
E.154-56022	5206139470225	E27	131x131x400mm	0.750Kg	INOX	1/8	1
E.154-56023	5206139470232	E27	131x131x800mm	1.000Kg	INOX	1/8	1

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**



CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.145-20617	5207227062797	E27	230x170x230mm	0.850Kg	BLACK	1/8	1
E.145-20618	5207227062803	E27	230x170x230mm	0.850Kg	BLACK	1/8	1
E.145-20619	5207227062810	E27	170x170x300mm	0.910Kg	BLACK	1/8	1
E.145-20620	5207227062827	E27	170x170x1100mm	1.400Kg	BLACK	1/4	1



- APLIQUE / COLUMNAS
- WALL / COLUMN LIGHTS

MATERIAL DE PRODUCCION: **ALUMINIO & CRISTAL**
PRODUCTION MATERIAL: **ALUMINIUM & GLASS**




Color Box
PACKING


E.154-55101
E.154-55103


E.154-55105
E.154-55107


E.154-55113
E.154-55115

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.154-55101	5206139461018	E27	200x170x410mm	0.750Kg	NEGRO / BLACK	1/12	1
E.154-55103	5206139461032	E27	200x170x410mm	0.750Kg	BONCE / BRONZE	1/12	1
E.154-55105	5206139461056	E27	200x170x410mm	0.750Kg	NEGRO / BLACK	1/12	1
E.154-55107	5206139461070	E27	200x170x410mm	0.750Kg	BONCE / BRONZE	1/12	1
E.154-55113	5206139461131	E27	150x150x440mm	0.750Kg	NEGRO / BLACK	1/10	1
E.154-55115	5206139461155	E27	150x150x440mm	0.750Kg	BONCE / BRONZE	1/10	1


E.154-55121
E.154-55123


E.154-55125
E.154-55127


E.154-55133
E.154-55135

CODE	BARCODE	BASE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.154-55121	5206139461216	E27	160x220x340mm	0.800Kg	NEGRO / BLACK	1/12	1
E.154-55123	5206139461230	E27	160x220x340mm	0.800Kg	BONCE / BRONZE	1/12	1
E.154-55125	5206139461254	E27	300x220x305mm	0.800Kg	NEGRO / BLACK	1/12	1
E.154-55127	5206139461278	E27	300x220x305mm	0.800Kg	BONCE / BRONZE	1/12	1
E.154-55133	5206139461339	E27	200x200x357mm	0.800Kg	NEGRO / BLACK	1/10	1
E.154-55135	5206139461353	E27	200x200x357mm	0.800Kg	BONCE / BRONZE	1/10	1

- GLOBOS PLASTICO PMMA RECARGABLES
- PLASTIC GLOBES PMMA RECHARGEABLE

MATERIAL DE PRODUCCION: **POLIETILENO**
PRODUCTION MATERIAL: **POLYETHYLENE**

INCLUYE MANDO A DISTANCIA POR INFRARROJOS

INFRARED REMOTE CONTROL INCLUDED



RGBWW

PLUS | VOLT 5V 50/60Hz | OUTPUT VOLTAGE 24V | E ENERGY CLASS | IP67 | 2 YEARS GUARANTEE

BATTERY Lithium 2200mAh | 8h CHARGING TIME | 16h DISCHARGE TIME | LUMENS 200lm | ON-OFF 15.000 | LIFETIME 20,000 hr | START TIME 0.5 Sec | IK08 | OPERATING TEMPERATURE +75°C -20°C



Brown Box with Sticker PACKING

CODE	BARCODE	WATT	AMPERAGE	KELVIN	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.153-55350	5207227062469	5W	1A	RBGWW	ø300mm	1.100Kg	WHITE	1/2	1
E.153-55351	5207227062476	5W	1A	RBGWW	ø400mm	1.500Kg	WHITE	1/1	1
E.153-55352	5207227062483	5W	1A	RBGWW	ø500mm	2.300Kg	WHITE	1/1	1





• GLOBOS DE PLASTICO PMMA
• PLASTIC GLOBES PMMA

MATERIAL DE PRODUCCION: **PMMA & ABS**
PRODUCTION MATERIAL: **PMMA & ABS**






BASE E27 | OPERATING TEMPERATURE +50°C -20°C | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DIMENSIONS	WEIGHT	COLOR	PACKING	MOQ
E.153-55300	5207227011788	ø200x200mm	0.279Kg	OPAL	1/18	1
E.153-55301	5207227011818	ø250x250mm	0.420Kg	OPAL	1/12	1
E.153-55302	5207227011115	ø300x300mm	0.603Kg	OPAL	1/8	1
E.153-55303	5207227011153	ø400x400mm	1.131Kg	OPAL	1/4	1
E.153-55305	5207227011054	ø200x200mm	0.279Kg	HONEY	1/18	1
E.153-55306	5207227011092	ø250x250mm	0.420Kg	HONEY	1/12	1
E.153-55307	5207227011139	ø300x300mm	0.603Kg	HONEY	1/8	1
E.153-55308	5207227011177	ø400x400mm	1.131Kg	HONEY	1/4	1

• ACCESORIOS PARA GLOBOS DE PMMA
• ACCESSORIES FOR PLASTIC GLOBES PMMA

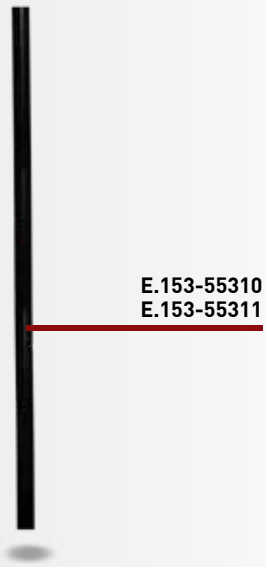

E.153-55310
E.153-55311



E.153-55313
BASE COLUMNA
COLUMN BASE



E.153-55312
BASE PARA BOLA
SHORT BALL BASE

OPERATING TEMPERATURE +50°C -20°C | IP65 | 2 YEARS GUARANTEE



Brown Box with Sticker PACKING

CODE	BARCODE	DIMENSIONS	MATERIAL	WEIGHT	COLOR	PACKING	MOQ
E.153-55310	5207227011832	ø60x1000mm	PVC	1.100Kg	NEGRO / BLACK	1/12	1
E.153-55311	5207227011030	ø60x1800mm	PVC	1.980Kg	NEGRO / BLACK	1/6	1
E.153-55313	5207227011023	160x120mm	ABS	0.065Kg	NEGRO / BLACK	1/50	1
E.153-55312	5207227011078	160x170mm	ABS	0.186Kg	NEGRO / BLACK	1/50	1



E.147-99946
LED FILAMENT BULBS STAND

32 cm
171 cm
42 cm



E.147-99946
LED SMD BULBS STAND

32 cm
171 cm
42 cm



E.147-99812
LED FILAMENT BULBS STAND

53 cm
180 cm
33 cm



E.147-99947
LED FILAMENT BULBS STAND

49 cm
189 cm
45 cm

EUROLAMP puede ofrecerle una amplia gama de Stands de Productos Promocionales, inteligentes y prácticos, adecuados para todas las instalaciones comerciales con requisitos de suministro de cantidad mínima de pedido. Para obtener más información, comuníquese con nuestro representante de ventas asociado.

EUROLAMP is able to provide you with a wide range of Promotional Product Stands, smart and practical, suitable for all business facilities with minimum order quantity supply requirements. For more information please contact our associate sales representative.



E.147-99804
LED SMD BULBS STAND

53 cm
175 cm
33 cm

E.147-99806
BATTERIES STAND

41.5 cm
162 cm
32 cm

E.147-99811
SMART WI-FI STAND

53 cm
175 cm
33 cm

E.147-99807
PRODUCTS STAND

60 cm
85 cm
80 cm



ICONS EXPLANATION

VOLT 220-240V 50/60Hz — Voltage / Tensión de red

BASE E27 — Lampholder / Portalámparas

NOT DIMMABLE — Not Dimmable / No regulable

DIMMABLE — Dimmable / Regulable

BEAM ANGLE 360° — Beam Angle / Ángulo de apertura

ON-OFF 25.000 — On-Off Switches / Encendidos

LIFETIME 25.000 hr — Lifetime Hours / Vida útil

START TIME 0.5 Sec — Start Time / Tiempo de encendido

OPERATING TEMPERATURE +45°C -30°C — Operating Temperatura / Temperatura de trabajo

AMPERAGE 10 A — Amperage / Amperaje

CRI >80 — Color Rendering Index / Índice de Reproducción Cromática

CRI Ra >90

IP 65 — Ingress Protection / Índice de Protección

IK10 — Resist Impact Factor / Índice de Resistencia a Impactos

2kV LIGHTING PROTECTION — Lighting Protection / Protección Contra Rayos

ON-OFF BUTTON — On-Off Button / Botón Apagado-Encendido

BATTERY 3.7V Lithium — Battery Type / Tipo de Batería

SOUND ALARM 120 dB — Decibel / Decibelios

GROUNDING — Grounding / Toma de Tierra

FUNCTION INDICATOR — Function Indicator / Indicador de Función

SHUTTER PROTECTION — Shutter Protection / Obturador de Protección


CABLE CROSS SECTION 3x1.5mm² — Cable Cross Section / Sección de cable

CABLE EXTENSION 1.8 m — Cable Extension / Cable de Extensión


2 YEARS GUARANTEE — Years of Guarantee / Años de Garantía




EUROLAMP®
Pioneers in New Technology !



Color Box with Eurohole
Caja de Color con Euroagujero



Color Window Box with Eurohole
Caja de Color con Ventana y Euroagujero



Color Box
Caja de Color




Color Window Box
Caja de Color con Ventana




Blister Packing
Blister con Euroagujero



Double Blister Packing
Blister Doble



Blister with Clamshell & Eurohole
Blíster con Clamshell y Euroagujero




PVC Box
Caja PVC



Paper Sleeve Packing
Protector de Papel



Pearl Foam Packing
Espuma de Poliestireno



Bulk Packing
Bultos



Palette
Palet

AIMUR ILUMINACION

ICONS EXPLANATION

VOLT 220-240V 50/60Hz — Voltage / Tensión

OUTPUT VOLTAGE 36V — Output Voltage / Tensión de salida

12-80W — Watt

E ENERGY CLASS — Energy Class / Clase energética

AMPERAGE 500 mA — Amperage / Amperios

NOT DIMMABLE — Non-Dimmable Device / NO regulable

DIMMABLE — Dimmable Device / Regulable

BEAM ANGLE 70° — Beam Angle / Haz de apertura

IP20 — Ingress Protection / Indice de protección

3 YEARS GUARANTEE — Years of Guarantee / Años de Garantía

LUMENS 80 lm/w — Lumens per Watt / Lumenes por W

ON-OFF 15.000 — On-Off Switches / Encendidos

LIFETIME 50.000 hr — Lifetime Hours / Vida útil en horas

LED TYPE SMD 2835 — Led Type / Tipo de Led

PF >0.90 — Power Factor / Factor de potencia

CRI >80 — Color Rendering Index / Indice Cromático

IK10 — Resist Impact Factor / Factor de resistencias a impactos

START TIME 1 Sec — Start Time / Tiempo de encendido

FLICKER FREE — Flicker Free / Sin parpadeos

CLASS I — Appliance Class / Clase I

kg 5.500 kg — Weight / Peso

2-3 m INSTALLATION HEIGHT — Installation Height / Altura de la instalación

OPERATING TEMPERATURE +40°C -10°C — Operating Temperature / Temperatura de trabajo

24h CHARGING TIME — Charging Time / Tiempo de carga

60-120min DISCHARGE TIME — Discharge Time / Tiempo de descarga

BATTERY Li-ion 1200mAh — Battery Type / Tipo de Batería

EUROLAMP®
Pioneers in New Technology !

GROUNDING
Grounding
Toma de Tierra

Ø60mm CUTTING DIAMETER
Cutting Diameter/Dimension
Diámetro de corte

MOVEMENT SENSOR
Sensor Type
Tipo de Sensor

TYPE G9
Lamp Type
Tipo de Bombilla

MAX WATT LED 7W
Maximum Watt for Led Lamp
Máximos Watios para bombilla LED

MAX WATT HALOGEN 42W
Maximum Watt for Halogen Lamp
Máximos Watios bombilla Halogena

TAPE CUTTING 25mm
Led Tape Cutting Distance
Corte en tira de LED

TAPE TOTAL LENGTH 5.0 m
Led Tape Total Length
Longitud total de la tira de LED

TAPE EXPANSION 10 m
Led Tape Expansion
Extensión de la tira de LED

White Box with Sticker PACKING

Caja blanca con pegatina

Brown Box with Sticker PACKING

Caja marrón con una pegatina

Color Box PACKING

Caja en Colores

Double Blister PACKING

Blister de Doble Tapa

SilverBag PACKING


Bolsa Plata

Nylon Bag PACKING

Bolsa de Naylon

PlasticBag PACKING

Bolsa de Plástico

Cap by Shrink Film PACKING

Laterales de cartón

PVC Box with Sticker PACKING

Caja PVC